

20
11

METRIC

PRODUCT CATALOGUE

ROTORS SPRAYS MP ROTATOR VALVES CONTROLLERS CENTRAL CONTROL SENSORS DRIP/MICRO



Hunter[®]
THE IRRIGATION INNOVATORS

Catalogue Owner

Sales Manager

Mobile

E-mail

Note

WHAT YOU HOLD IN YOUR HANDS IS THE LATEST INNOVATION IN THE IRRIGATION INDUSTRY.

This catalogue of professional irrigation products is designed to make the information you are looking for easy to find. We simplified navigation with clear tabs for each section and a bar at the top of each page highlighting the main features of that product. We redesigned the spec builders and product charts to make them easier to read and understand.

This is not just a printed catalogue; it is a companion to the hunterindustries.com website. Each product now has an easy-to-remember URL included on the page (i.e. www.hunterindustries.com/ICORE) where you can find more information, images, and technical specs. This allowed us to keep the catalog clear and easy to use while still providing a tremendous amount of product information.

"THIS CATALOGUE, ALONG WITH OUR PRODUCT INNOVATIONS, STARTED WITH FEEDBACK FROM YOU, OUR CUSTOMER."

Of course, there are many new products featured, all of which are highlighted on the facing page. We have new products to help simplify design and installation; irrigate more efficiently; reduce waste; and conserve water.

This catalogue, along with all of our product innovations, started with feedback from you, our customer. Please keep the feedback coming, and we will continue to live up to our reputation as The Irrigation Innovators.

Greg Hunter,
Vice President of Marketing
Hunter Industries, Inc.



Greg Hunter,
Vice President of Marketing

Hunter®

WHAT'S NEW

TAKING GREAT DESIGN OFF THE PAGE AND INTO THE FIELD

An I-40 rotor runs in the field of Qualcomm Stadium in San Diego, California.



16 ROTORS

PGP ULTRA

Now with full-circle adjustment, non-strippable drive mechanism with auto-arc return, and other new features.



28 ROTORS

I-90 NOZZLES

Expanding the available selection from six to eight nozzles, the enhanced I-90 now offers both shorter and longer radius capabilities.



36 SPRAYS

PRO-SPRAY® FAMILY

Now expanded to three choices, find the spray that's right for the site.



55 VALVES

ACCU-SYNC™


A simple pressure regulator designed for all of Hunter's control valves. Both adjustable and fixed models available.



68 CONTROLLERS

X-CORE

A simple controller now with Solar Sync and Hunter remote compatibility.



72 CONTROLLERS

I-CORE

Get modularity, an intuitive interface, and six language options in this commercial controller.



73 CONTROLLERS

DUAL

Two-wire systems require less labor, less maintenance, and less equipment cost.



76 CONTROLLERS

ICD-HP

The indispensable field tool for the decoder professional, saving installation and diagnostic time.



82 CENTRAL

IMMS 3.0

The central control system is now available with graphical user interface with customizable map-based navigation.



88 SENSORS

WIRELESS RAIN-CLIK

New frequency allows for global use and overall construction improved to prevent water intrusion.



90 SENSORS

WIRELESS SOLAR-SYNC

The simple, compact ET sensor is now available in a wireless version, for easier and faster installation.



94 DRIP/MICRO

PLD: TEE AND AIR RELIEF

Applies water slowly and evenly for consistent distribution so water soaks in gradually, easily reaching its intended goal.


BLUE PRINT OF AN EFFICIENT IRRIGATION SYSTEM

A properly designed, managed, and maintained irrigation system is an essential tool for a healthy, functional landscape. The Hunter products featured here will maximize the effectiveness of the water you use.

PGP Ultra and I-20




Hunter rotors are the best choice when watering a large turf or landscape area. Our nozzles are engineered for excellent water distribution at low precipitation rates to keep landscape looking its best, while using water efficiently.



Pro-Spray and Nozzles



Smaller areas require spray sprinklers for proper watering. Hunter's spray bodies are available with pressure regulation to ensure the most accurate watering of any landscape. Hunter's spray nozzles are meticulously engineered and tested to provide even watering and efficient use.



MP Rotator




The ultimate solution for small-to medium-sized areas, this high-efficiency, low precipitation rate sprinkler offers unmatched performance and proven water savings up to 30% over sprays.



PGV, ICV and Drip Control Kits




Hunter's trusted valve line ensures system reliability and accuracy. Accu-Sync can be used on systems with excess pressure to extend the life of the system components and provide the correct operating pressure to the sprinklers. Drip zone kits are equipped with pressure regulators and filters to provide drip and micro irrigation components with the correct pressure and contaminant-free water.

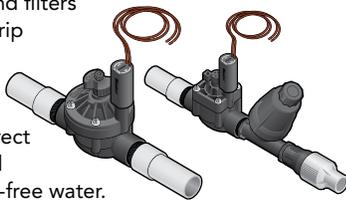

Drip/Micro Irrigation




Drip irrigation is an efficient choice for certain landscape situations. It applies water directly to the root zone area of landscape plants, helping to limit excess irrigation. Micro spray emitters can be used to cover small planting beds efficiently.

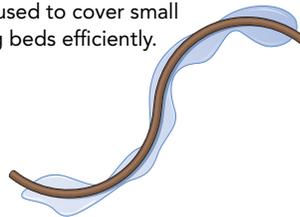

Pro-C/I-Core



The correct controller for the job is essential to meet the needs of any landscape, from unpredictable weather to municipal watering requirements. Having a customizable controller that is sensor compatible is the first step to a water-efficient system.

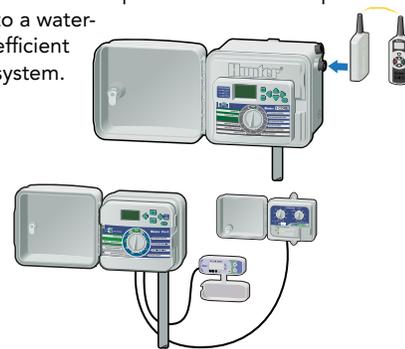

Flow-Clik/HFS




Flow sensors prevent systems from running when there is a leak or broken component. The Flow-Clik will work with most Hunter controllers to suspend irrigation, and the HFS is compatible with specific Hunter controllers to monitor overflow and provide flow totaling for better management.



Solar Sync



Solar Sync monitors weather, working with the controller to adjust the system for changing conditions, ensuring water is not wasted.

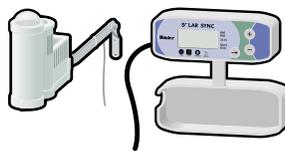

LEGEND

- SPRAY HEADS
- ROTORS
- MP ROTATORS
- CONTROL VALVES
- LANDSCAPE DRIPLINE
- WEATHER SENSOR
- FLOW SENSOR
- CONTROLLER



TABLE OF CONTENTS

ROTORS


SPRAYS/NOZZLES

MP ROTATOR

VALVES

CONTROLLERS

Advanced Features ... 10	Advanced Features ... 32	Eco Rotator 48	Advanced Features ... 54	Advanced Features ... 66
PGJ 12	PS Ultra 34	MP Rotator 50	Accu-Sync™ 55	X-Core 68
SRM 13	Pro-Spray® 36		SRV 56	PCC 69
PGP 14	PRS30 37		PGV 57	Pro-C 70
PGP Ultra 16	PRS40 38		PGV Jar-Top 58	ICC 71
I-20 18	Pro Adjustable Nozzles 40		PGV-ASV 59	I-Core 72
I-25 20	Pro-Spray® Fixed Arc Nozzles 42		ICV 60	DUAL 73
I-35 22	Nozzles 44		IBV 61	ACC 74
I-40 24	Nozzles/Bubblers 45		Quick Couplers 62	ACC-99D 75
I-60 26				HFS 76
I-90 28				ICD-HP 76
				ROAM 77
				ICR 77
				SVC 78
				WVS 78
				XC Hybrid 79
				Eco Logic 80

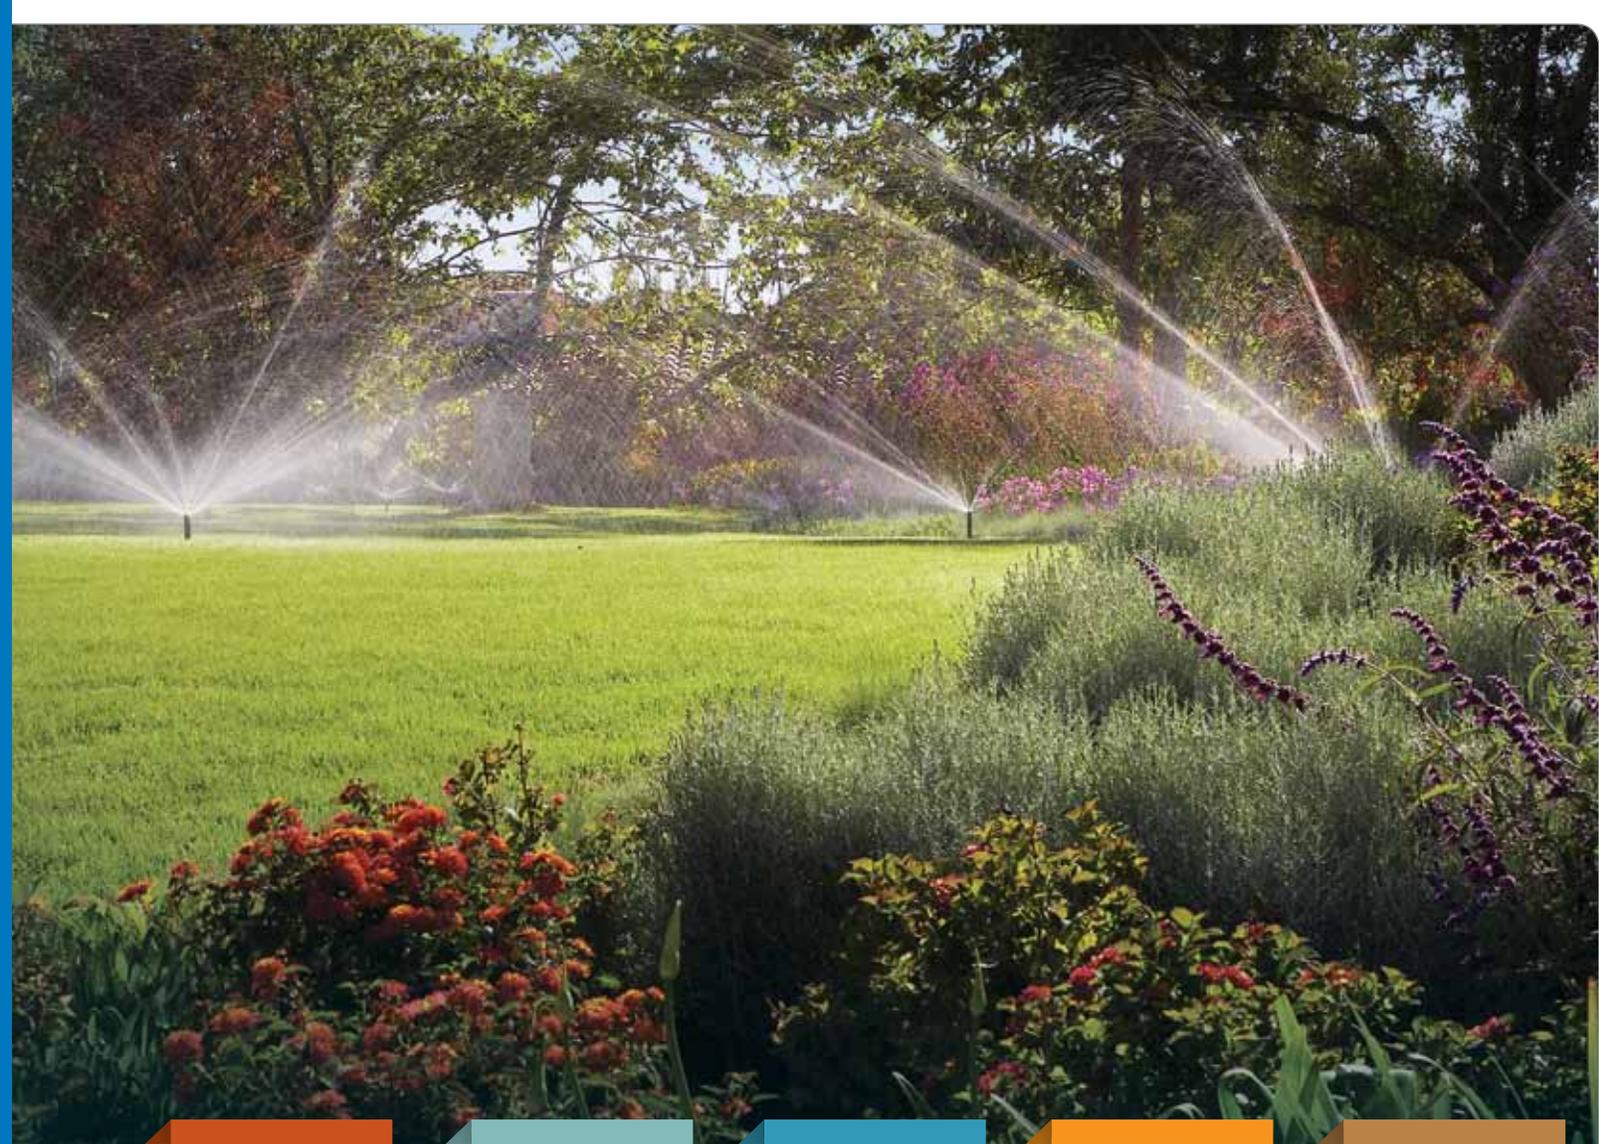

CENTRAL

SENSORS

DRIP/MICRO

ACCESSORIES

TECHNICAL

IMMS 3.0..... 82	Mini-Clik®..... 86	PLD 94	Accessories 100	Replacement Guide.. 102
	Freeze-Clik® 86	Micro Irrigation..... 95		Precipitation Rates .. 106
	Wind-Clik®..... 87	Drip Zone Control Kits..... 96		Slope Equivalents/ Irrigation..... 107
	Mini Weather Station 87	Design Illustration 97		Height of Spray..... 108
	Rain-Clik™..... 88	Root Zone Watering System 98		PLD Charts 110
	Flow-Clik™..... 89			Drip Zone Control Kit Charts.... 111
	Pump Start Relay..... 89			Conversion Factors . 112
	Solar Sync..... 90			Friction Loss Charts. 113
	ET System..... 91			Wire Data 120
				Wire Sizing 121
				Additional Data 122

See page 126 for Statement of Warranty.

ROTORS

COMPARISON CHART


	PGJ	SRM	PGP	PGP ULTRA	I-20	I-25	I-35	I-40	I-60	I-90
APPLICATIONS										
Spacings 4.5 m to 11.5 m	•	•		•	•					
Spacings 7.6 m to 14 m			•	•	•					
Spacings more than 14 m						•	•	•	•	•
Residential	•	•	•	•	•					
Commercial/institutional				•	•	•	•	•	•	•
Athletic fields					•	•	•	•		•
High vandalism areas				•	•	•	•	•		•
Low pressure systems	•	•	•	•					•	
Riser-mounted sprinklers	•			•	•					
Ground cover and/or shrubs	•		•	•	•					
Reclaimed water ID cover	•			•	•	•	•	•	•	•

ADVANCED FEATURES

AUTOMATIC ARC RETURN

This feature returns to the original arc regardless of where the turret is turned. This ensures vandal protection in any environment.

PGP Ultra, I-20, I-25, I-35, I-40

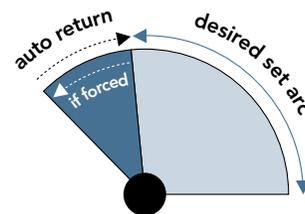

NON-STRIPPABLE DRIVE

The patent-pending, non-strippable, vandal proof drive mechanism enables the turret to be turned without causing damage.


PGP Ultra, I-20, I-25, I-35, I-40



PART- AND FULL-CIRCLE IN ONE MODEL

Patented non-reversing 360 for part- and full-circle in one model, from 50 to 360 degrees.

PGP Ultra, I-20, I-25, I-35, I-40

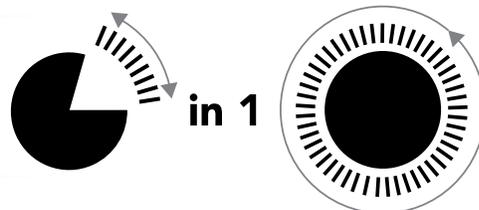

HEADED AND SLOTTED SET SCREW

Use a slotted screwdriver or the Hunter wrench for easier and simpler adjustments as needed.

PGJ, PGP Ultra, I-20, I-35



FLOSTOP™ CONTROL

FloStop closes the flow of water from individual sprinkler heads while the system is running. This is ideal for changing nozzles or turning off specific heads during maintenance and construction.

I-20, I-35



OPPOSING NOZZLE 360° MODEL

The opposing nozzle design offers excellent water distribution. With primary and secondary nozzles on opposing sides of the turret, streams arc in opposite directions as the sprinkler rotates for outstanding midrange and close-in watering.

I-40, I-90



COLOUR CODED NOZZLES

Nozzles are easier to differentiate in the field for simple installation and quick organization.

I-25, I-35, I-60, I-90



STAINLESS STEEL RISER

For unforgiving soil conditions, unpredictable climates, or heavy foot traffic, stainless steel is the best choice.

Standard on I-40 and I-60; optional on I-20, I-25, and I-35



RECLAIMED WATER ID

Purple caps indicate where non-potable irrigation water is being used.

PGJ, PGP Ultra, I-20, I-25, I-35, I-40, I-60, I-90



DRAIN CHECK VALVE

As air in lines can cause long-term damage to rotors and plumbing, the drain check valve keeps lines from draining when the system is shut off. This saves water, reduces liability, and increases system life.

PGJ, PGP Ultra, I-20, I-25, I-35, I-40, I-60, I-90



PGJ

APPLICATION

Residential

RADIUS

4.3 to 11.6 m

FLOW RATES

0.13 to 1.23 m³/hr
2.2 to 20.5 l/min

THE PGJ HAS ALL THE BENEFITS OF A ROTOR IN A COMPACT, SPRAY-SIZED PACKAGE.



FEATURES

- Models: Shrub, 10 cm, 15 cm, 30 cm
- Arc setting: 40 to 360 degrees
- Nozzle choices: 8
- Nozzle range: 0.75 to 5.0
- Standard factory installed nozzle: 2.0 only
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 2 years

ADVANCED FEATURES

- Headed and slotted set screw
 - Reclaimed water ID (optional)
 - Drain check valve (optional)
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 4.3 to 11.6 m

Flow rate: 0.13 to 1.23 m³/hr; 2.2 to 20.5 l/min

Recommended pressure range:

1.7 to 3.8 bar; 170 to 380 kPa

Operating pressure range:

1.4 to 6.9 bar; 140 to 690 kPa

Precipitation rates: 15 mm/hr approx.

Nozzle trajectory: 14 degrees approx.

FACTORY INSTALLED OPTIONS

Drain check valve (up to 2 m of elevation)

Reclaimed water ID cover

USER INSTALLED OPTIONS

Drain check valve (up to 2.1 m of elevation; P/N 462078)

PGJ Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
.75	1.7	170	4.3	0.13	2.2	14	17
	2.0	200	4.6	0.14	2.4	14	16
	2.5	250	4.9	0.16	2.7	13	15
	3.0	300	5.2	0.18	3.0	13	15
	3.5	350	5.2	0.19	3.2	14	17
3.8	380	5.5	0.20	3.4	13	15	
1.0	1.7	170	5.2	0.18	3.0	13	15
	2.0	200	5.5	0.19	3.2	13	15
	2.5	250	5.5	0.21	3.5	14	16
	3.0	300	5.8	0.23	3.8	14	16
	3.5	350	5.8	0.24	4.1	15	17
3.8	380	6.1	0.25	4.2	14	16	
1.5	1.7	170	6.1	0.27	4.5	15	17
	2.0	200	6.4	0.29	4.8	14	16
	2.5	250	6.4	0.32	5.4	16	18
	3.0	300	6.7	0.36	6.0	16	18
	3.5	350	6.7	0.39	6.4	17	20
3.8	380	7.0	0.40	6.7	16	19	
2.0	1.7	170	7.0	0.34	5.6	14	16
	2.0	200	7.3	0.37	6.2	14	16
	2.5	250	7.3	0.42	7.1	16	18
	3.0	300	7.6	0.48	8.0	17	19
	3.5	350	7.6	0.53	8.8	18	21
3.8	380	7.9	0.56	9.3	18	20	
2.5	1.7	170	7.9	0.46	7.6	15	17
	2.0	200	8.2	0.49	8.1	14	17
	2.5	250	8.2	0.54	9.0	16	18
	3.0	300	8.5	0.59	9.8	16	19
	3.5	350	8.5	0.63	10.5	17	20
3.8	380	8.8	0.65	10.9	17	19	
3.0	1.7	170	8.8	0.51	8.5	13	15
	2.0	200	9.1	0.56	9.3	13	15
	2.5	250	9.1	0.64	10.6	15	18
	3.0	300	9.4	0.72	12.0	16	19
	3.5	350	9.4	0.78	13.1	18	20
3.8	380	9.8	0.82	13.7	17	20	
4.0	1.7	170	9.8	0.80	13.3	17	19
	2.0	200	10.1	0.83	13.8	16	19
	2.5	250	10.1	0.89	14.8	18	20
	3.0	300	10.4	0.94	15.7	17	20
	3.5	350	10.4	0.98	16.3	18	21
3.8	380	10.7	1.00	16.7	18	20	
5.0	1.7	170	10.7	1.02	17.0	18	21
	2.0	200	11.0	1.06	17.6	18	20
	2.5	250	11.0	1.11	18.5	18	21
	3.0	300	11.3	1.17	19.4	18	21
	3.5	350	11.3	1.21	20.1	19	22
3.8	380	11.6	1.23	20.5	18	21	

Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2. Optimum nozzle performance shown in bold.



PGJ-00: Overall height: 18 cm
Exposed diameter: 3 cm
Inlet size: ½" female



PGJ-04: Overall height: 18 cm
Pop-up height: 10 cm
Exposed diameter: 3 cm
Inlet size: ½" female



PGJ-06: Overall height: 23 cm
Pop-up height: 15 cm
Exposed diameter: 3 cm
Inlet size: ½" female



PGJ-12: Overall height: 41 cm
Pop-up height: 30 cm
Exposed diameter: 3 cm
Inlet size: ½" female



SPECIFICATIONBUILDER

www.hunterindustries.com/PGJ

MODELS	STANDARD FEATURES	FEATURE OPTIONS
PGJ-00 = Shrub	Adjustable arc, 8 standard nozzles	R
PGJ-04 = 10 cm (4") pop-up		V, R
PGJ-06 = 15 cm (6") pop-up		V, R
PGJ-12 = 30 cm (12") pop-up		V, R

V = Drain check valve
R = Drain check valve and reclaimed water ID

EXAMPLES

PGJ-04	10 cm (4") pop-up, adjustable arc
PGJ-06 - V	15 cm (6") pop-up, adjustable arc, with drain check valve
PGJ-12 - R	30 cm (12") pop-up, adjustable arc, with drain check valve and reclaimed water ID

SRM

APPLICATION

Residential

RADIUS

4.0 to 9.4 m

FLOW RATES

0.08 to 0.82 m³/hr
1.4 to 13.7 l/min

THIS SHORT RANGE ROTOR OFFERS LOW PRECIPITATION RATES FOR APPLICATIONS THAT NORMALLY CALL FOR SPRAYS.

FEATURES

- Model: 10 cm
- Arc setting: 40 to 360 degrees
- Nozzle choices: 6
- Nozzle choices: 0.50 to 3.0
- Standard factory installed nozzle: 3.0 only
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 2 years

OPERATING SPECIFICATIONS

Radius: 4.0 to 9.4 m

Flow rate: 0.08 to 0.82 m³/hr;
1.4 to 13.7 l/minRecommended pressure range:
1.7 to 3.8 bar; 170 to 380 kPaOperating pressure range:
1.4 to 7 bar; 140 to 700 kPa

Precipitation rates: 11 mm/hr approx.

Nozzle trajectory: 18 degrees approx.

USER INSTALLED OPTIONS

Drain check valve (up to 2.1 m
of elevation; P/N 462078)

SRM Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
.50	1.7	170	4.0	0.08	1.4	11	12
	2.0	200	4.3	0.09	1.6	10	12
	2.5	250	4.3	0.11	1.8	12	14
	3.0	300	4.6	0.12	2.0	12	13
	3.5	350	4.6	0.13	2.2	13	15
	3.8	380	4.9	0.14	2.3	12	14
.75	1.7	170	4.9	0.13	2.2	11	13
	2.0	200	5.2	0.14	2.4	11	12
	2.5	250	5.2	0.16	2.7	12	14
	3.0	300	5.5	0.18	3.0	12	14
	3.5	350	5.5	0.19	3.2	13	15
	3.8	380	5.8	0.20	3.4	12	14
1.0	1.7	170	5.8	0.18	2.9	11	12
	2.0	200	6.1	0.19	3.2	10	12
	2.5	250	6.1	0.21	3.5	11	13
	3.0	300	6.4	0.24	3.9	12	13
	3.5	350	6.4	0.25	4.2	12	14
	3.8	380	6.7	0.26	4.4	12	14
1.5	1.7	170	6.7	0.27	4.5	12	14
	2.0	200	7.0	0.29	4.8	12	14
	2.5	250	7.0	0.32	5.4	13	15
	3.0	300	7.3	0.36	6.0	13	16
	3.5	350	7.3	0.39	6.5	15	17
	3.8	380	7.6	0.40	6.7	14	16
2.0	1.7	170	7.3	0.35	5.8	13	15
	2.0	200	7.9	0.38	6.3	12	14
	2.5	250	7.9	0.43	7.1	14	16
	3.0	300	8.2	0.48	8.0	14	16
	3.5	350	8.2	0.53	8.8	16	18
	3.8	380	8.5	0.55	9.2	15	17
3.0	1.7	170	8.2	0.51	8.5	15	17
	2.0	200	8.5	0.56	9.3	15	18
	2.5	250	8.5	0.64	10.6	17	20
	3.0	300	9.1	0.72	12.0	17	20
	3.5	350	9.1	0.78	13.1	19	22
	3.8	380	9.4	0.82	13.7	18	21

Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2. Optimum nozzle performance shown in bold.



PGJ-04: Overall height: 18 cm
Pop-up height: 10 cm
Exposed diameter: 3 cm
Inlet size: 1/2" female

ROTORS

SPECIFICATIONBUILDER

www.hunterindustries.com/SRM

MODELS	STANDARD FEATURES
SRM-04 = 10 cm (4") pop-up	Adjustable arc, 6 standard nozzles
EXAMPLE	
SRM-04	10 cm (4") pop-up, adjustable arc

AFTER THREE DECADES, THE WORLD'S BEST SELLING ROTOR IS STILL NUMBER ONE.

FEATURES

- Model: 10 cm
- Arc setting: 40 to 360 degrees
- Nozzle choices: 27
- Nozzle ranges: #1 to #12 red, 1.5 to 8.0 blue, #4 LA to #10 LA grey
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 3 years

ADVANCED FEATURES

- Low angle nozzle choices

OPERATING SPECIFICATIONS

Radius: 6.4 to 15.8 m
 Flow rate: 0.10 to 3.22 m³/hr; 1.7 to 53.7 l/min
 Recommended pressure range: 1.7 to 4.5 bar; 170 to 450 kPa
 Operating pressure range: 1.4 to 7 bar; 140 to 700 kPa
 Precipitation rates: 10 mm/hr approx.
 Nozzle trajectory: Std = 25 degrees, Low angle = 13 degrees

FACTORY INSTALLED OPTIONS

Nozzles: #5 to #8 red, 1.5 to 4.0 blue

USER INSTALLED OPTIONS

Drain check valve (up to 1.2 m of elevation; P/N 142300)



PGP-ADJ: Overall height: 19 cm
 Pop-up height: 10 cm
 Exposed diameter: 4 cm
 Inlet size: 3/4" female



SPECIFICATIONBUILDER


www.hunterindustries.com/PGP

MODELS	STANDARD FEATURES	NOZZLE OPTIONS
PGP-ADJ-B = 10 cm (4") pop-up	Adjustable arc, with BLUE nozzle rack	1.5 to 4.0 = Factory installed nozzle number
PGP-ADJ = 10 cm (4") pop-up	Adjustable arc, with RED nozzle rack	#5 to #8 = Factory installed nozzle number
PGP-ATR = Impact replacement	Adjustable arc, with RED nozzle rack	#7 = Factory installed nozzle number

EXAMPLES

PGP-ADJ	10 cm (4") pop-up, adjustable arc, and RED nozzle rack
PGP-ADJ-B - 3.0	10 cm (4") pop-up, adjustable arc, and 3.0 BLUE nozzle
PGP-ADJ - 07	10 cm (4") pop-up, adjustable arc, and #7 RED nozzle

PGP CHARTS



PGP Red Standard Nozzle Performance Data – Metric (P/N 130900)

Nozzle	Pressure Bar	Pressure kPa	Radius m	Flow m ³ /hr	Flow l/min	Precip mm/hr	▲
1	1.7	170	8.2	0.10	1.7	3	3
	2.0	200	8.5	0.11	1.8	3	3
	2.5	250	8.5	0.13	2.1	4	4
	3.0	300	8.8	0.15	2.4	4	4
	3.5	350	8.8	0.16	2.7	4	5
	4.0	400	9.1	0.18	2.9	4	5
4.5	450	9.1	0.19	3.2	5	5	
2	1.7	170	8.5	0.14	2.4	4	5
	2.0	200	8.8	0.16	2.6	4	5
	2.5	250	8.8	0.17	2.9	4	5
	3.0	300	9.1	0.19	3.2	5	5
	3.5	350	9.1	0.21	3.5	5	6
	4.0	400	9.4	0.22	3.7	5	6
4.5	450	9.4	0.23	3.9	5	6	
3	1.7	170	8.8	0.18	3.0	5	5
	2.0	200	9.1	0.20	3.3	5	5
	2.5	250	9.1	0.22	3.7	5	6
	3.0	300	9.4	0.25	4.1	6	6
	3.5	350	9.4	0.27	4.5	6	7
	4.0	400	9.8	0.29	4.8	6	7
4.5	450	9.8	0.31	5.1	6	7	
4	1.7	170	9.4	0.24	4.1	5	6
	2.0	200	9.8	0.27	4.4	6	6
	2.5	250	9.8	0.30	5.0	6	7
	3.0	300	10.1	0.34	5.6	7	8
	3.5	350	10.1	0.37	6.2	7	8
	4.0	400	10.4	0.40	6.6	7	9
4.5	450	10.4	0.43	7.1	8	9	
5	1.7	170	10.1	0.33	5.5	7	8
	2.0	200	10.4	0.36	5.9	7	8
	2.5	250	10.4	0.39	6.5	7	8
	3.0	300	11.0	0.43	7.2	7	8
	3.5	350	11.6	0.46	7.7	7	8
	4.0	400	11.6	0.49	8.1	7	8
4.5	450	11.6	0.51	8.6	8	9	
6	1.7	170	10.1	0.42	6.9	8	10
	2.0	200	10.4	0.45	7.5	8	10
	2.5	250	10.7	0.51	8.5	9	10
	3.0	300	11.0	0.57	9.4	9	11
	3.5	350	11.6	0.61	10.2	9	11
	4.0	400	11.6	0.66	10.9	10	11
4.5	450	11.9	0.70	11.6	10	11	
7	1.7	170	10.1	0.54	9.0	11	12
	2.0	200	10.4	0.58	9.7	11	12
	2.5	250	11.0	0.65	10.8	11	12
	3.0	300	11.6	0.72	12.0	11	12
	3.5	350	12.2	0.78	12.9	10	12
	4.0	400	12.2	0.83	13.8	11	13
4.5	450	12.2	0.88	14.6	12	14	
8	1.7	170	11.0	0.66	11.0	11	13
	2.0	200	11.3	0.71	11.8	11	13
	2.5	250	11.6	0.79	13.2	12	14
	3.0	300	11.9	0.87	14.5	12	14
	3.5	350	12.5	0.94	15.6	12	14
	4.0	400	12.5	1.00	16.6	13	15
4.5	450	12.8	1.05	17.6	13	15	
9	1.7	170	11.3	0.73	12.2	11	13
	2.0	200	11.6	0.80	13.4	12	14
	2.5	250	11.6	0.92	15.4	14	16
	3.0	300	12.5	1.05	17.5	13	16
	3.5	350	13.4	1.15	19.2	13	15
	4.0	400	13.4	1.25	20.9	14	16
4.5	450	13.7	1.35	22.4	14	17	
10	1.7	170	12.2	1.14	19.0	15	18
	2.0	200	12.8	1.29	21.4	16	18
	2.5	250	13.4	1.44	24.0	16	18
	3.0	300	14.0	1.56	26.1	16	18
	3.5	350	14.3	1.68	28.0	16	19
	4.0	400	14.3	1.79	29.9	17	20
4.5	450	14.6	1.90	31.7	18	21	
11	1.7	170	12.8	1.55	25.9	19	22
	2.0	200	13.7	1.73	28.7	18	21
	2.5	250	14.0	1.90	31.7	19	22
	3.0	300	14.6	2.05	34.1	19	22
	3.5	350	14.9	2.18	36.3	20	23
	4.0	400	15.2	2.30	38.4	20	23
4.5	450	15.5	2.42	40.4	20	23	
12	1.7	170	12.8	2.03	33.8	25	29
	2.0	200	13.4	2.26	37.7	25	29
	2.5	250	14.3	2.51	41.8	24	28
	3.0	300	14.6	2.70	45.0	25	29
	3.5	350	14.9	2.88	48.1	26	30
	4.0	400	15.2	3.06	50.9	26	30
4.5	450	15.8	3.22	53.7	26	30	

PGP Blue Standard Nozzle Performance Data – Metric (P/N 665300)

Nozzle	Pressure Bar	Pressure kPa	Radius m	Flow m ³ /hr	Flow l/min	Precip mm/hr	▲
1.5	1.7	170	8.8	0.27	4.5	7	8
	2.0	200	9.1	0.29	4.8	7	8
	2.5	250	9.4	0.32	5.4	7	8
	3.0	300	9.8	0.35	5.9	7	9
	3.5	350	9.8	0.38	6.4	8	9
	4.0	400	9.8	0.41	6.8	9	10
4.5	450	9.4	0.43	7.2	10	11	
2.0	1.7	170	10.1	0.32	5.4	6	7
	2.0	200	10.1	0.35	5.8	7	8
	2.5	250	10.1	0.39	6.5	8	9
	3.0	300	10.4	0.43	7.2	8	9
	3.5	350	10.4	0.47	7.8	9	10
	4.0	400	10.4	0.50	8.3	9	11
4.5	450	10.4	0.53	8.8	10	11	
2.5	1.7	170	10.1	0.39	6.6	8	9
	2.0	200	10.4	0.43	7.1	8	9
	2.5	250	10.7	0.48	8.0	8	10
	3.0	300	10.7	0.54	8.9	9	11
	3.5	350	10.7	0.58	9.7	10	12
	4.0	400	10.7	0.62	10.4	11	13
4.5	450	10.7	0.66	11.1	12	13	
3.0	1.7	170	10.7	0.50	8.4	9	10
	2.0	200	10.7	0.54	9.1	10	11
	2.5	250	11.0	0.61	10.2	10	12
	3.0	300	11.6	0.68	11.4	10	12
	3.5	350	11.9	0.74	12.3	10	12
	4.0	400	11.9	0.79	13.2	11	13
4.5	450	11.9	0.84	14.0	12	14	
4.0	1.7	170	11.3	0.68	11.3	11	12
	2.0	200	11.6	0.73	12.2	11	13
	2.5	250	11.9	0.81	13.6	12	13
	3.0	300	12.2	0.90	15.0	12	14
	3.5	350	12.2	0.97	16.2	13	15
	4.0	400	12.5	1.04	17.3	13	15
4.5	450	12.5	1.10	18.3	14	16	
5.0	1.7	170	11.3	0.84	14.0	13	15
	2.0	200	11.6	0.91	15.2	14	16
	2.5	250	11.9	1.02	17.1	15	17
	3.0	300	12.8	1.14	19.0	14	16
	3.5	350	12.8	1.24	20.6	15	17
	4.0	400	12.8	1.32	22.1	16	19
4.5	450	12.8	1.41	23.4	17	20	
6.0	1.7	170	11.6	1.01	16.8	15	17
	2.0	200	11.9	1.09	18.2	15	18
	2.5	250	12.2	1.22	20.4	16	19
	3.0	300	13.1	1.36	22.7	16	18
	3.5	350	13.1	1.47	24.5	17	20
	4.0	400	13.4	1.57	26.2	18	20
4.5	450	13.4	1.67	27.9	19	21	
8.0	1.7	170	11.3	1.35	22.5	21	25
	2.0	200	11.9	1.46	24.3	21	24
	2.5	250	12.5	1.63	27.2	21	24
	3.0	300	13.4	1.81	30.2	20	23
	3.5	350	13.7	1.95	32.6	21	24
	4.0	400	14.0	2.09	34.8	21	25
4.5	450	14.0	2.22	36.9	23	26	

PGP Gray Low Angle Nozzle Performance Data – Metric (P/N 233200)

Nozzle	Pressure Bar	Pressure kPa	Radius m	Flow m ³ /hr	Flow l/min	Precip mm/hr	▲
4	1.7	170	6.4	0.30	4.9	14	17
	2.0	200	6.7	0.32	5.3	14	16
	2.5	250	7.0	0.35	5.9	14	17
	3.0	300	7.3	0.39	6.5	15	17
	3.5	350	7.9	0.42	7.0	13	15
	4.0	400	8.5	0.45	7.5	12	14
4.5	450	8.5	0.47	7.9	13	15	
5	1.7	170	7.3	0.33	5.6	12	14
	2.0	200	7.6	0.36	6.0	12	14
	2.5	250	7.9	0.40	6.7	13	15
	3.0	300	8.2	0.45	7.4	13	15
	3.5	350	8.5	0.48	8.0	13	15
	4.0	400	8.8	0.52	8.6	13	15
4.5	450	9.1	0.55	9.1	13	15	
6	1.7	170	8.8	0.44	7.3	11	13
	2.0	200	9.1	0.47	7.9	11	13
	2.5	250	9.4	0.53	8.8	12	14
	3.0	300	9.8	0.59	9.8	12	14
	3.5	350	10.1	0.64	10.6	13	15
	4.0	400	10.7	0.68	11.3	12	14
4.5	450	10.7	0.72	12.0	13	15	
7	1.7	170	8.5	0.58	9.7	16	18
	2.0	200	8.8	0.62	10.3	16	18
	2.5	250	9.4	0.68	11.4	15	18
	3.0	300	10.1	0.75	12.5	15	17
	3.5	350	10.7	0.80	13.3	14	16
	4.0	400	11.3	0.85	14.1	13	15
4.5	450	11.3	0.89	14.8	14	16	
8	1.7	170	9.1	0.71	11.8	17	20
	2.0	200	9.4	0.76	12.7	17	20
	2.5	250	9.8	0.84	14.1	18	20
	3.0	300	10.4	0.93	15.5	17	20
	3.5	350	11.3	1.00	16.6	16	18
	4.0	400	11.6	1.06	17.6	16	18

PGP ULTRA

APPLICATION
Residential/Light Commercial

RADIUS
4.9 to 14.0 m

FLOW RATES
0.07 to 3.23 m³/hr
1.2 to 53.8 l/min

THIS UPGRADE OF THE FIRST-CLASS PGP IS PACKED WITH NEW FEATURES.

FEATURES

- Models: Shrub, 10 cm, 30 cm
- Arc setting: 50 to 360 degrees
- Nozzle choices: 22
- Nozzle ranges: 1.5 to 8.0 blue, 2.0 LA to 4.5 LA grey, 0.50 to 3.0 black, 6.0 to 13.0 green
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 3 years

ADVANCED FEATURES

- Automatic arc return
 - Non-strippable drive
 - Part- and full-circle in one model
 - Headed and slotted set screw
 - Reclaimed water ID
 - Drain check valve (optional)
 - Low angle nozzle choices
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 4.9 to 14.0 m
 Flow rate: 0.07 to 3.23 m³/hr; 1.2 to 53.8 l/min
 Recommended pressure range: 1.7 to 4.5 bar; 170 to 450 kPa
 Operating pressure range: 1.4 to 7 bar; 140 to 700 kPa
 Precipitation rates: 10 mm/hr approx.
 Nozzle trajectory: Std=25 degrees, Low angle=13 degrees

FACTORY INSTALLED OPTIONS

Nozzles: 1.5 to 4.0
 Drain check valve (up to 3 m of elevation)
 Reclaimed water ID cover

USER INSTALLED OPTIONS

Drain check valve (up to 3 m of elevation; P/N 142300)

NEW NOZZLE SCREW.
ADJUST THE WAY YOU WANT TO.



PGP-00: Overall height: 19 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female



PGP-04: Overall height: 19 cm
Pop-up height: 10 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female



PGP-12: Overall height: 43 cm
Pop-up height: 30 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female



SPECIFICATIONBUILDER

www.hunterindustries.com/PGPULTRA

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
PGP-00 = Shrub	Adjustable arc, plastic riser, 8 standard nozzles, and 4 low-angle nozzles	CV, CV-R CV = Drain check valve CV-R = Drain check valve and reclaimed water ID	1.5 to 4.0 = Factory installed nozzle number
PGP-04 = 10 cm (4") pop-up			
PGP-12 = 30 cm (12") pop-up			

EXAMPLES

PGP-04	10 cm (4") pop-up, adjustable arc
PGP-00 - CV - 2.5	Shrub sprinkler, adjustable arc, with drain check valve, and 2.5 nozzle
PGP-12 - CV-R - 4.0	30 cm (12") pop-up, adjustable arc, with drain check valve, reclaimed water ID, and 4.0 nozzle

ROTORS

PGP ULTRA CHARTS



PGP Ultra Blue Standard Nozzle Performance Data – Metric (P/N 782900)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
1.5	2.0	200	9.1	0.29	4.8	7	8
	2.5	250	9.4	0.32	5.4	7	8
	3.0	300	9.8	0.35	5.9	7	9
	3.5 350	9.8	0.38	6.4	8	9	
	4.0	400	9.8	0.41	6.8	9	10
4.5	450	9.4	0.43	7.2	10	11	
2.0	2.0	200	10.1	0.35	5.8	7	8
	2.5	250	10.1	0.39	6.5	8	9
	3.0	300	10.4	0.43	7.2	8	9
	3.5 350	10.4	0.47	7.8	9	10	
	4.0	400	10.4	0.50	8.3	9	11
4.5	450	10.4	0.53	8.8	10	11	
2.5	2.0	200	10.4	0.43	7.1	8	9
	2.5	250	10.7	0.48	8.0	8	10
	3.0	300	10.7	0.54	8.9	9	11
	3.5 350	10.7	0.58	9.7	10	12	
	4.0	400	10.7	0.62	10.4	11	13
4.5	450	10.7	0.66	11.1	12	13	
3.0	2.0	200	10.7	0.54	9.1	10	11
	2.5	250	11.0	0.61	10.2	10	12
	3.0	300	11.6	0.68	11.4	10	12
	3.5 350	11.9	0.74	12.3	10	12	
	4.0	400	11.9	0.79	13.2	11	13
4.5	450	11.9	0.84	14.0	12	14	
4.0	2.0	200	11.6	0.73	12.2	11	13
	2.5	250	11.9	0.81	13.6	12	13
	3.0	300	12.2	0.90	15.0	12	14
	3.5 350	12.2	0.97	16.2	13	15	
	4.0	400	12.5	1.04	17.3	13	15
4.5	450	12.5	1.10	18.3	14	16	
5.0	2.0	200	11.6	0.91	15.2	14	16
	2.5	250	11.9	1.02	17.1	15	17
	3.0	300	12.8	1.14	19.0	14	16
	3.5 350	12.8	1.24	20.6	15	17	
	4.0	400	12.8	1.32	22.1	16	19
4.5	450	12.8	1.41	23.4	17	20	
6.0	2.0	200	11.9	1.09	18.2	15	18
	2.5	250	12.2	1.22	20.4	16	19
	3.0	300	13.1	1.36	22.7	16	18
	3.5 350	13.1	1.47	24.5	17	20	
	4.0	400	13.4	1.57	26.2	18	20
4.5	450	13.4	1.67	27.9	19	21	
8.0	2.0	200	11.9	1.46	24.3	21	24
	2.5	250	12.5	1.63	27.2	21	24
	3.0	300	13.4	1.81	30.2	20	23
	3.5 350	13.7	1.95	32.6	21	24	
	4.0	400	14.0	2.09	34.8	21	25
4.5	450	14.0	2.22	36.9	23	26	

PGP Ultra Low Angle Nozzle Performance Data – Metric (P/N 782900)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
2.0 LA	1.7	170	7.3	0.33	5.6	12	14
	2.0	200	7.6	0.36	6.0	12	14
	2.5	250	7.9	0.40	6.7	13	15
	3.0	300	8.2	0.45	7.4	13	15
	3.5 350	8.5	0.48	8.0	13	15	
4.0	400	8.8	0.52	8.6	13	15	
4.5	450	9.1	0.55	9.1	13	15	
2.5 LA	1.7	170	7.9	0.44	7.3	14	16
	2.0	200	8.2	0.47	7.9	14	16
	2.5	250	8.8	0.53	8.8	14	16
	3.0	300	9.4	0.59	9.8	13	15
	3.5 350	10.1	0.64	10.6	13	15	
4.0	400	10.4	0.68	11.3	13	15	
4.5	450	10.7	0.72	12.0	13	15	
3.5 LA	1.7	170	8.5	0.58	9.7	16	18
	2.0	200	8.8	0.62	10.3	16	18
	2.5	250	9.1	0.68	11.4	16	19
	3.0	300	10.1	0.75	12.5	15	17
	3.5 350	10.7	0.80	13.3	14	16	
4.0	400	11.0	0.85	14.1	14	16	
4.5	450	11.3	0.89	14.8	14	16	
4.5 LA	1.7	170	8.2	0.71	11.8	21	24
	2.0	200	8.8	0.76	12.7	19	23
	2.5	250	9.1	0.84	14.1	20	23
	3.0	300	10.1	0.93	15.5	18	21
	3.5 350	10.7	1.00	16.6	18	20	
4.0	400	11.0	1.06	17.6	18	20	
4.5	450	11.3	1.12	18.6	18	20	

PGP Ultra High Flow Standard Nozzle Performance Data – Metric (P/N 444800)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
10	1.7	170	10.7	1.48	24.6	26	30
	2.0	200	11.9	1.60	26.7	23	26
	2.5	250	12.5	1.80	30.0	23	27
	3.0	300	12.8	2.01	33.5	25	28
	3.5	350	13.1	2.18	36.3	25	29
4.0 400	13.7	2.34	39.0	25	29		
4.5	450	14.0	2.49	41.5	25	29	
13	1.7	170	11.0	1.91	31.9	32	37
	2.0	200	12.2	2.08	34.6	28	32
	2.5	250	12.8	2.34	38.9	29	33
	3.0	300	13.1	2.61	43.4	30	35
	3.5	350	13.4	2.83	47.1	31	36
4.0 400	13.7	3.03	50.5	32	37		
4.5	450	14.0	3.23	53.8	33	38	
6.0 LA	1.7	170	9.1	0.86	14.3	21	24
	2.0	200	9.4	0.94	15.6	21	24
	2.5	250	10.1	1.07	17.8	21	24
	3.0	300	10.7	1.20	20.0	21	24
	3.5	350	11.3	1.31	21.9	21	24
4.0 400	11.6	1.42	23.6	21	24		
4.5	450	11.9	1.52	25.3	21	25	
8.0 LA	1.7	170	10.1	1.17	19.5	23	27
	2.0	200	10.7	1.28	21.3	22	26
	2.5	250	11.3	1.44	24.0	23	26
	3.0	300	11.6	1.61	26.9	24	28
	3.5	350	11.9	1.76	29.3	25	29
4.0 400	12.5	1.89	31.5	24	28		
4.5	450	12.5	2.01	33.6	26	30	

PGP Ultra 5.5 m Short Radius Nozzle Performance Data – Metric (P/N 466100)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
.50 SR	1.7	170	4.9	0.07	1.2	6	7
	2.0	200	5.2	0.08	1.3	6	7
	2.5	250	5.2	0.09	1.5	7	8
	3.0	300	5.2	0.10	1.7	8	9
	3.5 350	5.5	0.12	1.9	8	9	
4.0	400	5.5	0.13	2.1	8	10	
4.5	450	5.5	0.14	2.3	9	10	
1.0 SR	1.7	170	4.9	0.16	2.7	14	16
	2.0	200	5.2	0.17	2.9	13	15
	2.5	250	5.2	0.19	3.2	14	17
	3.0	300	5.2	0.21	3.6	16	18
	3.5 350	5.5	0.23	3.8	15	18	
4.0	400	5.5	0.25	4.1	16	19	
4.5	450	5.5	0.26	4.3	17	20	
2.0 SR	1.7	170	4.9	0.28	4.7	24	27
	2.0	200	5.2	0.31	5.2	23	27
	2.5	250	5.2	0.36	6.0	27	31
	3.0	300	5.2	0.41	6.9	31	35
	3.5 350	5.5	0.45	7.6	30	35	
4.0	400	5.5	0.49	8.2	33	38	
4.5	450	5.5	0.53	8.9	35	41	

PGP Ultra 7.6 m Short Radius Nozzle Performance Data – Metric (P/N 466100)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
.75 SR	1.7	170	6.7	0.12	2.0	5	6
	2.0	200	7.0	0.13	2.2	5	6
	2.5	250	7.0	0.15	2.4	6	7
	3.0	300	7.3	0.16	2.7	6	7
	3.5 350	7.6	0.17	2.9	6	7	
4.0	400	7.6	0.19	3.1	6	7	
4.5	450	7.6	0.20	3.3	7	8	
1.5 SR	1.7	170	6.7	0.23	3.8	10	12
	2.0	200	7.0	0.25	4.1	10	12
	2.5	250	7.0	0.28	4.6	11	13
	3.0	300	7.3	0.31	5.2	12	13
	3.5 350	7.6	0.34	5.6	12	13	
4.0	400	7.6	0.36	6.0	12	14	
4.5	450	7.6	0.39	6.4	13	15	
3.0 SR	1.7	170	6.7	0.53	8.9	24	27
	2.0	200	7.0	0.56	9.3	23	26
	2.5	250	7.0	0.60	10.0	24	28
	3.0	300	7.3	0.64	10.7	24	28
	3.5 350	7.6	0.67	11.2	23	27	
4.0	400	7.6	0.70	11.7	24	28	
4.5	450	7.6	0.73	12.1	25	29	

Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2. Optimum nozzle performance shown in bold.

ROTORS

I-20

APPLICATION
Residential/Commercial

RADIUS
4.9 to 14.0 m

FLOW RATES
0.07 to 3.23 m³/hr
1.2 to 53.8 l/min

THE I-20 IS THE ROTOR THAT'S GOT ALL THE FEATURES YOU NEED.

FEATURES

- Models: Shrub, 10 cm, 15 cm, 30 cm
- Models (stainless steel): 10 cm, 15 cm
- Arc setting: 50 to 360 degrees
- Nozzle choices: 22
- Nozzle racks: 1.5 to 8.0 blue, 2.0 LA to 4.5 LA grey, 0.50 to 3.0 black, 6.0 to 13.0 green
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 5 years

ADVANCED FEATURES

- Automatic arc return
 - Non-strippable drive
 - Part- and full-circle in one model
 - Headed and slotted set screw
 - FloStop® control
 - Reclaimed water ID
 - Stainless steel riser
 - Drain check valve (up to 3 m of elevation; optional)
 - Low angle nozzle choices
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 4.9 to 14.0 m
 Flow Rate: 0.07 to 3.23 m³/hr;
 1.2 to 53.8 l/min
 Recommended pressure range:
 1.7 to 4.5 bar; 170 to 450 kPa

Operating pressure range: 1.4 to 7 bar;
 140 to 700 kPa
 Precipitation rates: 10 mm/hr approx.
 Nozzle trajectory: Std = 25 degrees,
 Low angle = 13 degrees

FACTORY INSTALLED OPTIONS

Nozzles: 1.5 to 4.0
 Reclaimed water ID cover



I-20-00: Overall height: 20 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female

I-20-04: Overall height: 19 cm
Pop-up height: 10 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female

I-20-06: Overall height: 25 cm
Pop-up height: 15 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female

I-20-12: Overall height: 43 cm
Pop-up height: 30 cm
Exposed diameter: 4.5 cm
Inlet size: 3/4" female

SPECIFICATIONBUILDER

www.hunterindustries.com/I20

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-20-00 = Shrub	Adjustable arc, plastic riser, check valve, 8 standard nozzles, and 4 low-angle nozzles	R	1.5 to 4.0 = Factory installed nozzle number
I-20-04 = 10 cm (4") pop-up		NCV, R	
I-20-06 = 15 cm (6") pop-up		R	
I-20-12 = 30 cm (12") pop-up		R	

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-20-04-SS = 10 cm (4") pop-up	Adjustable arc, stainless steel riser, check valve 8 standard nozzles, and 4 low-angle nozzles	NCV, R	1.5 to 4.0 = Factory installed nozzle number
I-20-06-SS = 15 cm (6") pop-up		R	

EXAMPLES

I-20-04	10 cm (4") pop-up, adjustable arc
I-20-12 - NCV - R - 4.0	30 cm (12") pop-up, adjustable arc, without check valve, with reclaimed water ID, and 4.0 nozzle
I-20-06-SS - R - 3.0	15 cm (6") pop-up, adjustable arc, stainless steel, reclaimed water ID, and 3.0 nozzle

ROTORS

I-20 CHARTS



I-20 Blue Standard Nozzle

Performance Data – Metric (P/N 782900)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
1.5	2.0	200	9.1	0.29	4.8	7	8
	2.5	250	9.4	0.32	5.4	7	8
	3.0	300	9.8	0.35	5.9	7	9
	3.5	350	9.8	0.38	6.4	8	9
	4.0	400	9.8	0.41	6.8	9	10
4.5	450	9.4	0.43	7.2	10	11	
2.0	2.0	200	10.1	0.35	5.8	7	8
	2.5	250	10.1	0.39	6.5	8	9
	3.0	300	10.4	0.43	7.2	8	9
	3.5	350	10.4	0.47	7.8	9	10
	4.0	400	10.4	0.54	8.3	9	11
4.5	450	10.4	0.53	8.8	10	11	
2.5	2.0	200	10.4	0.43	7.1	8	9
	2.5	250	10.7	0.48	8.0	8	10
	3.0	300	10.7	0.54	8.9	9	11
	3.5	350	10.7	0.58	9.7	10	12
	4.0	400	10.7	0.62	10.4	11	13
4.5	450	10.7	0.66	11.1	12	13	
3.0	2.0	200	10.7	0.54	9.1	10	11
	2.5	250	11.0	0.61	10.2	10	12
	3.0	300	11.6	0.68	11.4	10	12
	3.5	350	11.9	0.74	12.3	10	12
	4.0	400	11.9	0.79	13.2	11	13
4.5	450	11.9	0.84	14.0	12	14	
4.0	2.0	200	11.6	0.73	12.2	11	13
	2.5	250	11.9	0.81	13.6	12	13
	3.0	300	12.2	0.90	15.0	12	14
	3.5	350	12.2	0.97	16.2	13	15
	4.0	400	12.5	1.04	17.3	13	15
4.5	450	12.5	1.10	18.3	14	16	
5.0	2.0	200	11.6	0.91	15.2	14	16
	2.5	250	11.9	1.02	17.1	15	17
	3.0	300	12.8	1.14	19.0	14	16
	3.5	350	12.8	1.24	20.6	15	17
	4.0	400	12.8	1.32	22.1	16	19
4.5	450	12.8	1.41	23.4	17	20	
6.0	2.0	200	11.9	1.09	18.2	15	18
	2.5	250	12.2	1.22	20.4	16	19
	3.0	300	13.1	1.36	22.7	16	18
	3.5	350	13.1	1.47	24.5	17	20
	4.0	400	13.4	1.57	26.2	18	20
4.5	450	13.4	1.67	27.9	19	21	
8.0	2.0	200	11.9	1.46	24.3	21	24
	2.5	250	12.5	1.63	27.2	21	24
	3.0	300	13.4	1.81	30.2	20	23
	3.5	350	13.7	1.95	32.6	21	25
	4.0	400	14.0	2.09	34.8	21	25
4.5	450	14.0	2.22	36.9	23	26	



I-20 Gray Low Angle Nozzle

Performance Data – Metric (P/N 782900)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
2.0 LA	1.7	170	7.3	0.33	5.6	12	14
	2.0	200	7.6	0.36	6.0	12	14
	2.5	250	7.9	0.40	6.7	13	15
	3.0	300	8.2	0.45	7.4	13	15
	3.5	350	8.5	0.48	8.0	13	15
4.0	400	8.8	0.52	8.6	13	15	
4.5	450	9.1	0.55	9.1	13	15	
2.5 LA	1.7	170	7.9	0.44	7.3	14	16
	2.0	200	8.2	0.47	7.9	14	16
	2.5	250	8.8	0.53	8.8	14	16
	3.0	300	9.4	0.59	9.8	13	15
	3.5	350	10.1	0.64	10.6	13	15
4.0	400	10.4	0.68	11.3	13	15	
4.5	450	10.7	0.72	12.0	13	15	
3.5 LA	1.7	170	8.5	0.58	9.7	16	18
	2.0	200	8.8	0.62	10.3	16	18
	2.5	250	9.1	0.68	11.4	16	19
	3.0	300	10.1	0.75	12.5	15	17
	3.5	350	10.7	0.80	13.3	14	16
4.0	400	11.0	0.85	14.1	14	16	
4.5	450	11.3	0.89	14.8	14	16	
4.5 LA	1.7	170	8.2	0.71	11.8	21	24
	2.0	200	8.8	0.76	12.7	19	23
	2.5	250	9.1	0.84	14.1	20	23
	3.0	300	10.1	0.93	15.5	18	21
	3.5	350	10.7	1.00	16.6	18	20
4.0	400	11.0	1.06	17.6	18	20	
4.5	450	11.3	1.12	18.6	18	20	



I-20 High Flow Nozzles (Green)

Performance Data – Metric (P/N 444800)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
10	1.7	170	10.7	1.48	24.6	26	30
	2.0	200	11.9	1.60	26.7	23	26
	2.5	250	12.5	1.80	30.0	23	27
	3.0	300	12.8	2.01	33.5	25	28
	3.5	350	13.1	2.18	36.3	25	29
4.0	400	13.7	2.34	39.0	25	29	
4.5	450	14.0	2.49	41.5	25	29	
13	1.7	170	11.0	1.91	31.9	32	37
	2.0	200	12.2	2.08	34.6	28	32
	2.5	250	12.8	2.34	38.9	29	33
	3.0	300	13.1	2.61	43.4	30	35
	3.5	350	13.4	2.83	47.1	31	36
4.0	400	13.7	3.03	50.5	32	37	
4.5	450	14.0	3.23	53.8	33	38	
6.0 LA	1.7	170	9.1	0.86	14.3	21	24
	2.0	200	9.4	0.94	15.6	21	24
	2.5	250	10.1	1.07	17.8	21	24
	3.0	300	10.7	1.20	20.0	21	24
	3.5	350	11.3	1.31	21.9	21	24
4.0	400	11.6	1.42	23.6	21	24	
4.5	450	11.9	1.52	25.3	21	25	
8.0 LA	1.7	170	10.1	1.17	19.5	23	27
	2.0	200	10.7	1.28	21.3	22	26
	2.5	250	11.3	1.44	24.0	23	26
	3.0	300	11.6	1.61	26.9	24	28
	3.5	350	11.9	1.76	29.3	25	29
4.0	400	12.5	1.89	31.5	24	28	
4.5	450	12.5	2.01	33.6	26	30	



I-20 5.5 m Short Radius Nozzle

Performance Data – Metric (P/N 466100)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
.50 SR	1.7	170	4.9	0.07	1.2	6	7
	2.0	200	5.2	0.08	1.3	6	7
	2.5	250	5.2	0.09	1.5	7	8
	3.0	300	5.2	0.10	1.7	8	9
	3.5	350	5.5	0.12	1.9	8	9
4.0	400	5.5	0.13	2.1	8	10	
4.5	450	5.5	0.14	2.3	9	10	
1.0 SR	1.7	170	4.9	0.16	2.7	14	16
	2.0	200	5.2	0.17	2.9	13	15
	2.5	250	5.2	0.19	3.2	14	17
	3.0	300	5.2	0.21	3.6	16	18
	3.5	350	5.5	0.23	3.8	15	18
4.0	400	5.5	0.25	4.1	16	19	
4.5	450	5.5	0.26	4.3	17	20	
2.0 SR	1.7	170	4.9	0.28	4.7	24	27
	2.0	200	5.2	0.31	5.2	23	27
	2.5	250	5.2	0.36	6.0	27	31
	3.0	300	5.2	0.41	6.9	31	35
	3.5	350	5.5	0.45	7.6	30	35
4.0	400	5.5	0.49	8.2	33	38	
4.5	450	5.5	0.53	8.9	35	41	

I-20 7.6 m Short Radius Nozzle

Performance Data – Metric (P/N 466100)

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
.75 SR	1.7	170	6.7	0.12	2.0	5	6
	2.0	200	7.0	0.13	2.2	5	6
	2.5	250	7.0	0.15	2.4	6	7
	3.0	300	7.3	0.16	2.7	6	7
	3.5	350	7.6	0.17	2.9	6	7
4.0	400	7.6	0.19	3.1	6	7	
4.5	450	7.6	0.20	3.3	7	8	
1.5 SR	1.7	170	6.7	0.23	3.8	10	12
	2.0	200	7.0	0.25	4.1	10	12
	2.5	250	7.0	0.28	4.6	11	13
	3.0	300	7.3	0.31	5.2	12	13
	3.5	350	7.6	0.34	5.6	12	13
4.0	400	7.6	0.36	6.0	12	14	
4.5	450	7.6	0.39	6.4	13	15	
3.0 SR	1.7	170	6.7	0.53	8.9	24	27
	2.0	200	7.0	0.56	9.3	23	26
	2.5	250	7.0	0.60	10.0	24	28
	3.0	300	7.3	0.64	10.7	24	28
	3.5	350	7.6	0.67	11.2	23	27
4.0	400	7.6	0.70	11.7	24	28	
4.5	450	7.6	0.73	12.1	25	29	

Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2. Optimum nozzle performance shown in bold.

I-25

APPLICATION
Commercial/Municipal

RADIUS
11.9 to 21.6 m

FLOW RATES
**0.82 to 7.24 m³/hr
13.6 to 120.7 l/min**

THIS RUGGED ROTOR CAN STAND UP TO ANY COMMERCIAL JOB.

FEATURES

- Models: 10 cm, 15 cm
- Models (stainless riser): 10 cm, 15 cm
- Arc setting: 50 to 360 degrees
- Nozzle choices: 12
- Nozzle range: #4 to #28
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 5 years

ADVANCED FEATURES

- Automatic arc return
 - Non-strippable drive
 - Part- and full-circle in one model
 - Colour coded nozzles
 - Reclaimed water ID (optional)
 - Stainless steel riser (optional)
 - Drain check valve (up to 3 m of elevation)
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Flow rate: 0.82 to 7.24 m³/hr; 13.6 to 120.7 l/min
 Radius: 11.9 to 21.6 m
 Recommended pressure range: 2.5 to 7.0 bar; 250 to 700 kPa
 Operating pressure range: 2.8 to 6.9 bar; 280 to 690 kPa
 Precipitation rates: 15 mm approx.
 Nozzle trajectory: 25 degrees

FACTORY INSTALLED OPTIONS

Nozzles: #4 to #28
 Reclaimed water ID cover
 High speed rotation model (stainless steel only)

I-25-04: Overall height: 20 cm
 Pop-up height: 10 cm
 Exposed diameter: 5 cm
 Inlet Size: 1" female NPT or BSP

I-25-06: Overall height: 26 cm
 Pop-up height: 15 cm
 Exposed diameter: 3 cm
 Inlet Size: 1" female NPT or BSP



SPECIFICATIONBUILDER

www.hunterindustries.com/I25

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-25-04 = 10 cm (4") pop-up	Adjustable arc, plastic riser, check valve, and 5 nozzles	R, B	#4 to #28 = Factory installed nozzle number
I-25-06 = 15 cm (6") pop-up			

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-25-04-SS = 10 cm (4") pop-up	Adjustable arc, stainless steel riser, check valve, and 5 nozzles	R, HS, HS-R, B	#4 to #28 = Factory installed nozzle number
I-25-06-SS = 15 cm (6") pop-up			

EXAMPLES

I-25-04 - B	10 cm (4") pop-up, adjustable arc, BSP inlet threads
I-25-04-SS - R - B - 18	10 cm (4") pop-up, adjustable arc, stainless steel riser, BSP inlet threads, reclaimed water ID, and #18 nozzle
I-25-06-SS - HS-R - B	15 cm (6") pop-up, adjustable arc, stainless steel riser, high speed and reclaimed water ID, and BSP inlet threads

ROTORS

I-25 CHARTS

I-25 Nozzle Performance Data – Metric

Nozzle	Pressure		Radius	Flow		Precip mm/hr	
	Bar	kPa	m	m ³ /hr	l/min	■	▲
4  Yellow	2.5	250	11.9	0.82	13.6	12	13
	3.0	300	12.2	0.91	15.2	12	14
	3.5	350	12.5	0.98	16.4	13	15
	4.0	400	12.5	1.05	17.5	13	16
	4.5	450	12.8	1.11	18.6	14	16
5.0	500	13.1	1.18	19.6	14	16	
5  White	2.5	250	12.8	0.95	15.9	12	13
	3.0	300	13.1	1.04	17.3	12	14
	3.5	350	13.4	1.11	18.5	12	14
	4.0	400	13.4	1.17	19.6	13	15
	4.5	450	13.7	1.24	20.6	13	15
5.0	500	14.0	1.29	21.5	13	15	
7  Orange*	2.5	250	13.4	1.44	24.0	16	19
	3.0	300	14.0	1.54	25.6	16	18
	3.5	350	14.3	1.61	26.9	16	18
	4.0	400	14.3	1.68	28.0	16	19
	4.5	450	14.6	1.75	29.1	16	19
5.0	500	14.9	1.81	30.1	16	19	
8  Lt. Brown	2.5	250	14.0	1.65	27.5	17	19
	3.0	300	14.3	1.81	30.1	18	20
	3.5	350	14.9	1.94	32.3	17	20
	4.0	400	15.2	2.05	34.2	18	20
	4.5	450	15.2	2.16	36.0	19	22
5.0	500	15.5	2.27	37.8	19	22	
10  Lt. Green*	3.0	300	15.2	2.15	35.8	18	21
	3.5	350	15.5	2.32	38.6	19	22
	4.0	400	15.8	2.48	41.3	20	23
	4.5	450	16.2	2.63	43.9	20	23
	5.0	500	16.2	2.78	46.3	21	25
5.5	550	16.5	2.94	48.9	22	25	
13  Lt. Blue	3.0	300	15.8	2.38	39.6	19	22
	3.5	350	16.2	2.57	42.8	20	23
	4.0	400	16.5	2.75	45.7	20	23
	4.5	450	16.5	2.91	48.5	21	25
	5.0	500	16.8	3.07	51.2	22	25
5.5	550	16.8	3.24	54.0	23	27	
15  Gray*	3.0	300	16.8	2.86	47.7	20	24
	3.5	350	17.1	3.05	50.8	21	24
	4.0	400	17.4	3.22	53.7	21	25
	4.5	450	17.4	3.38	56.3	22	26
	5.0	500	17.4	3.53	58.8	23	27
5.5	550	17.7	3.69	61.5	24	27	
18  Red	3.0	300	17.4	3.08	51.4	20	24
	3.5	350	17.7	3.31	55.2	21	24
	4.0	400	18.0	3.52	58.7	22	25
	4.5	450	18.3	3.72	62.0	22	26
	5.0	500	18.9	3.91	65.2	22	25
5.5	550	19.2	4.11	68.5	22	26	
20  Dk. Brown*	4.0	400	18.6	3.97	66.2	23	27
	4.5	450	18.9	4.20	70.1	24	27
	5.0	500	19.2	4.42	73.7	24	28
	5.5	550	19.5	4.66	77.7	25	28
	6.0	600	19.8	4.86	81.0	25	29
6.5	650	20.1	5.05	84.2	25	29	
23  Dk. Green	4.0	400	19.2	4.88	81.3	26	31
	4.5	450	19.5	5.18	86.3	27	31
	5.0	500	19.8	5.47	91.1	28	32
	5.5	550	20.1	5.78	96.3	29	33
	6.0	600	20.1	6.04	100.6	30	34
6.5	650	20.4	6.29	104.8	30	35	
25  Dk. Blue*	4.0	400	19.8	5.23	87.1	27	31
	4.5	450	20.1	5.58	93.1	28	32
	5.0	500	20.4	5.92	98.7	28	33
	5.5	550	21.0	6.29	104.9	28	33
	6.0	600	21.0	6.60	110.0	30	34
6.5	650	21.3	6.90	115.1	30	35	
28  Black	4.5	450	20.1	5.93	98.8	29	34
	5.0	500	20.7	6.21	103.5	29	33
	5.5	550	21.3	6.52	108.6	29	33
	6.0	600	21.3	6.77	112.8	30	34
	6.5	650	21.6	7.01	116.9	30	35
7.0	700	21.6	7.24	120.7	31	36	

I-25 High-Speed Nozzle Performance Data – Metric

Nozzle	Pressure		Radius	Flow		Precip mm/hr	
	Bar	kPa	m	m ³ /hr	l/min	■	▲
4  Yellow	2.5	250	11.0	0.81	13.6	14	16
	3.0	300	11.3	0.91	15.1	14	16
	3.5	350	11.6	0.99	16.4	15	17
	4.0	400	11.6	1.06	17.6	16	18
	4.5	450	11.6	1.13	18.8	17	19
5.0	500	11.9	1.19	19.9	17	19	
5  White	2.5	250	11.3	0.93	15.5	15	17
	3.0	300	11.6	1.04	17.3	16	18
	3.5	350	11.9	1.13	18.9	16	18
	4.0	400	12.2	1.22	20.3	16	19
	4.5	450	12.2	1.30	21.6	17	20
5.0	500	12.5	1.38	22.9	18	20	
7  Orange*	2.5	250	11.9	1.32	22.0	19	22
	3.0	300	12.2	1.46	24.3	20	23
	3.5	350	12.5	1.57	26.2	20	23
	4.0	400	12.8	1.68	27.9	20	24
	4.5	450	13.1	1.78	29.6	21	24
5.0	500	13.4	1.87	31.1	21	24	
8  Lt. Brown	2.5	250	12.5	1.54	25.7	20	23
	3.0	300	12.8	1.72	28.6	21	24
	3.5	350	13.1	1.86	31.0	22	25
	4.0	400	13.4	2.00	33.3	22	26
	4.5	450	13.4	2.13	35.4	24	27
5.0	500	13.7	2.25	37.5	24	28	
10  Lt. Green*	3.0	300	13.7	2.15	35.8	23	26
	3.5	350	14.0	2.32	38.6	24	27
	4.0	400	14.3	2.48	41.3	24	28
	4.5	450	14.6	2.63	43.9	25	28
	5.0	500	14.9	2.78	46.3	25	29
5.5	550	15.2	2.94	48.9	25	29	
13  Lt. Blue	3.0	300	14.3	2.38	39.6	23	27
	3.5	350	14.6	2.57	42.8	24	28
	4.0	400	14.9	2.75	45.7	25	28
	4.5	450	15.2	2.91	48.5	25	29
	5.0	500	15.5	3.07	51.2	25	29
5.5	550	15.5	3.24	54.0	27	31	
15  Gray*	3.0	300	14.6	2.86	47.7	27	31
	3.5	350	14.9	3.05	50.8	27	32
	4.0	400	15.2	3.22	53.7	28	32
	4.5	450	15.5	3.38	56.3	28	32
	5.0	500	16.2	3.53	58.8	27	31
5.5	550	16.5	3.69	61.5	27	31	
18  Red	3.0	300	14.9	3.08	51.4	28	32
	3.5	350	15.2	3.31	55.2	29	33
	4.0	400	15.5	3.52	58.7	29	34
	4.5	450	16.2	3.72	62.0	29	33
	5.0	500	16.8	3.91	65.2	28	32
5.5	550	17.4	4.11	68.5	27	31	
20  Dk. Brown*	4.0	400	16.2	3.97	66.2	30	35
	4.5	450	16.5	4.20	70.1	31	36
	5.0	500	17.1	4.42	73.7	30	35
	5.5	550	17.7	4.66	77.7	30	34
	6.0	600	17.7	4.86	81.0	31	36
6.5	650	18.0	5.05	84.2	31	36	
23  Dk. Green	4.0	400	17.1	4.88	81.3	33	39
	4.5	450	17.4	5.18	86.3	34	40
	5.0	500	17.7	5.47	91.1	35	40
	5.5	550	18.3	5.78	96.3	35	40
	6.0	600	18.3	6.04	100.6	36	42
6.5	650	18.6	6.29	104.8	36	42	
25  Dk. Blue*	4.0	400	17.7	5.23	87.1	33	39
	4.5	450	18.3	5.58	93.1	33	39
	5.0	500	18.9	5.92	98.7	33	38
	5.5	550	19.5	6.29	104.9	33	38
	6.0	600	19.8	6.60	110.0	34	39
6.5	650	20.1	6.90	115.1	34	39	
28  Black	4.5	450	18.0	5.93	98.8	37	42
	5.0	500	18.3	6.21	103.5	37	43
	5.5	550	18.9	6.52	108.6	36	42
	6.0	600	19.5	6.77	112.8	36	41
	6.5	650	19.8	7.01	116.9	36	41
7.0	700	20.4	7.24	120.7	35	40	



ROTORS

* 5 standard nozzles included with each sprinkler.

Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2.

I-35

APPLICATION
Commercial/Municipal

RADIUS
14.0 to 21.6 m

FLOW RATES
1.65 to 7.24 m³/hr
27.5 to 120.7 l/min

THE I-35 IS THE ONLY 1" ROTOR WITH EVERYTHING YOU NEED BUILT RIGHT IN.

FEATURES

- Model: 15 cm
- Arc setting: 50 to 360 degrees
- Nozzle choices: 8
- Nozzle choices: #9 to #30
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 5 years

ADVANCED FEATURES

- Automatic arc return
 - Non-strippable drive
 - Part- and full-circle in one model
 - Headed and slotted set screw
 - FloStop® control
 - Colour coded nozzles
 - Reclaimed water ID (optional)
 - Stainless steel riser (optional)
 - Drain check valve (up to 3 m of elevation)
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 14.0 to 21.6 m
 Flow rate: 1.65 to 7.24 m³/hr; 27.5 to 120.7 l/min
 Recommended pressure range: 2.5 to 7.0 bar; 250 to 700 kPa
 Operating pressure range: 2.5 to 7.0 bar; 250 to 700 kPa
 Precipitation rates: 12 mm/hr approx.
 Nozzle trajectory: 25 degrees

FACTORY INSTALLED OPTIONS

Nozzles: #9 to #30
 Reclaimed water ID cover
 High speed rotation model (stainless steel only)



I-35-06: Overall height: 26 cm
 Pop-up height: 15 cm
 Exposed diameter: 5 cm
 Inlet size: 1" female NPT or BSP



Triple port nozzle design



SPECIFICATIONBUILDER

www.hunterindustries.com/i35

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-35-06 = 15 cm (6") pop-up	Adjustable arc, plastic riser, check valve, and 8 nozzles	R, B R = Reclaimed water ID B = BSP inlet threads	#9 to #30 = Factory installed nozzle number
MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-35-06-SS = 15 cm (6") pop-up	Adjustable arc, stainless steel riser, check valve, and 8 nozzles	R, HS, HS-R, B R = Reclaimed water ID HS = High speed HS-R = High speed and reclaimed water ID B = BSP inlet threads	#9 to #30 = Factory installed nozzle number

EXAMPLES

I-35-06 - B	15 cm (6") pop-up, adjustable arc, with BSP inlet threads
I-35-06-SS - R - B - 18	15 cm (6") pop-up, adjustable arc, stainless steel riser, reclaimed water ID, with BSP inlet threads, and #18 nozzle
I-35-06-SS - B	15 cm (6") pop-up, adjustable arc, stainless steel riser, with BSP inlet threads

ROTORS

I-35 CHARTS



I-35 Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
9 Lt. Brown	2.5	250	14.0	1.65	27.5	17	19
	3.0	300	14.3	1.81	30.1	18	20
	3.5	350	14.9	1.94	32.3	17	20
	4.0	400	15.2	2.05	34.2	18	20
	4.5	450	15.2	2.16	36.0	19	22
12 Lt. Blue	3.0	250	15.8	2.38	39.6	19	22
	3.5	300	16.2	2.57	42.8	20	23
	4.0	350	16.5	2.75	45.7	20	23
	4.5	400	16.5	2.91	48.5	21	25
	5.0	450	16.8	3.07	51.2	22	25
15 Gray	3.0	300	16.8	2.86	47.7	20	24
	3.5	350	17.1	3.05	50.8	21	24
	4.0	400	17.4	3.22	53.7	21	25
	4.5	450	17.4	3.38	56.3	22	26
	5.0	500	17.4	3.53	58.8	23	27
18 Red	3.0	300	17.4	3.08	51.4	20	24
	3.5	350	17.7	3.31	55.2	21	24
	4.0	400	18.0	3.52	58.7	22	25
	4.5	450	18.3	3.72	62.0	22	26
	5.0	500	18.9	3.91	65.2	22	25
21 Dk. Brown	4.0	400	18.6	3.97	66.2	23	27
	4.5	450	18.9	4.20	70.1	24	27
	5.0	500	19.2	4.42	73.7	24	28
	5.5	550	19.5	4.66	77.7	25	28
	6.0	600	19.8	4.86	81.0	25	29
24 Dk. Green	4.0	400	19.2	4.88	81.3	26	31
	4.5	450	19.5	5.18	86.3	27	31
	5.0	500	19.8	5.47	91.1	28	32
	5.5	550	20.1	5.78	96.3	29	33
	6.0	600	20.1	6.04	100.6	30	34
27 Dk. Blue	4.0	400	19.8	5.23	87.1	27	31
	4.5	450	20.1	5.58	93.1	28	32
	5.0	500	20.4	5.29	98.7	28	33
	5.5	550	21.0	6.29	104.9	28	33
	6.0	600	21.0	6.60	110.0	30	34
30 Black	4.5	450	20.1	5.93	98.8	29	34
	5.0	500	20.7	6.21	103.5	29	33
	5.5	550	21.3	6.52	108.6	29	33
	6.0	600	21.3	6.77	112.8	30	34
	6.5	650	21.6	7.01	116.9	30	35
7.0	700	21.6	7.24	120.7	31	36	

I-35 High Speed Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
9 Lt. Brown	2.5	250	12.5	1.65	27.5	17	24
	3.0	300	12.8	1.81	30.1	18	25
	3.5	350	13.1	1.94	32.3	17	26
	4.0	400	13.4	2.05	34.2	18	26
	4.5	450	13.4	2.16	36.0	19	28
12 Lt. Blue	3.0	250	14.3	2.38	39.6	23	27
	3.5	300	14.6	2.57	42.8	24	28
	4.0	350	14.9	2.75	45.7	25	28
	4.5	400	15.2	2.91	48.5	25	29
	5.0	450	15.5	3.07	51.2	25	29
15 Gray	3.0	300	14.6	2.86	47.7	27	31
	3.5	350	14.9	3.05	50.8	27	32
	4.0	400	15.2	3.22	53.7	28	32
	4.5	450	15.5	3.38	56.3	28	32
	5.0	500	16.2	3.53	58.8	27	31
18 Red	3.5	300	14.9	3.08	51.4	28	32
	4.0	350	15.2	3.31	55.2	29	33
	4.5	400	15.5	3.52	58.7	29	34
	4.5	450	16.2	3.72	62.0	29	33
	5.0	500	16.8	3.91	65.2	28	32
21 Dk. Brown	4.0	400	16.2	3.97	66.2	30	35
	4.5	450	16.5	4.20	70.1	31	36
	5.0	500	17.1	4.42	73.7	30	35
	5.5	550	17.7	4.66	77.7	30	34
	6.0	600	17.7	4.86	81.0	31	36
24 Dk. Green	4.0	400	17.1	4.88	81.3	33	39
	4.5	450	17.4	5.18	86.3	34	40
	5.0	500	17.7	5.47	91.1	35	40
	5.5	550	18.3	5.78	96.3	35	40
	6.0	600	18.3	6.04	100.6	36	42
27 Dk. Blue	4.0	400	17.7	5.23	87.1	33	39
	4.5	450	18.3	5.58	93.1	33	39
	5.0	500	18.9	5.29	98.7	33	38
	5.5	550	19.5	6.29	104.9	33	38
	6.0	600	19.8	6.60	110.0	34	39
30 Black	4.5	450	18.0	5.93	98.8	37	42
	5.0	500	18.3	6.21	103.5	37	43
	5.5	550	18.9	6.52	108.6	26	42
	6.0	600	19.5	6.77	112.8	36	41
	6.5	650	19.8	7.01	116.9	36	41
7.0	700	20.4	7.24	120.7	35	40	

Note: All precipitation rates calculated for 180 degree operation.
For the precipitation rate for a 360 degree sprinkler, divide by 2.

I-40

APPLICATION
**Commercial/
High-End Municipal**

RADIUS
13.4 to 23.2 m

FLOW RATES
**1.52 to 7.76 m³/hr
25.4 to 129.4 l/min**

FOR SPORTS FIELDS AND PARKS, I-40 DELIVERS PROFESSIONAL RESULTS.

FEATURES

- Models: 10 cm, 15 cm
- Arc setting: 50 to 360 degrees
- Nozzle choices: 6
- Nozzle choices: #40 to #45, #15 to #28
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 5 years

ADVANCED FEATURES

- Automatic arc return
- Non-strippable drive
- Part- and full-circle in one model
- Opposing nozzle 360° model
- Reclaimed water ID (optional)
- Stainless steel riser
- Drain check valve (up to 4.5 m of elevation)

•• = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 13.4 to 23.2 m
 Flow rate: 1.52 to 7.76 m³/hr; 25.4 to 129.4 l/min
 Recommended pressure range: 2.8 to 7 bar; 280 to 700 kPa
 Operating pressure range: 2.5 to 7.0 bar; 250 to 700 kPa
 Precipitation rates: 15 mm/hr approx.
 Nozzle trajectory: 25 degrees

FACTORY INSTALLED OPTIONS

Nozzles: #40 to #45, #15 to #28
 Reclaimed water ID cover
 High speed rotation model

USER INSTALLED OPTIONS

Turf cup kit (P/N 460000)



Opposing nozzle 360° model



I-40-04: Overall height: 20 cm
 Pop-up height: 10 cm
 Exposed diameter: 5 cm
 Inlet size: 1" female NPT or BSP



I-40-06: Overall height: 26 cm
 Pop-up height: 15 cm
 Exposed diameter: 5 cm
 Inlet size: 1" female NPT or BSP



SPECIFICATIONBUILDER

www.hunterindustries.com/I40


MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-40-04-SS = 10 cm (4") pop-up	Adjustable arc, stainless steel riser, check valve, and 6 nozzles	ON, ON-R, HS, HS-R, R, B ON = Full circle opposing nozzles ON-R = Full circle opposing nozzles and reclaimed water ID HS = High speed HS-R = High speed and reclaimed water ID R = Reclaimed water ID B = BSP inlet threads	#40 to #45 = Factory installed nozzle number #15 to #28 = Factory installed nozzle number
I-40-06-SS = 15 cm (6") pop-up			

EXAMPLES

I-40-04-SS - B	10 cm (4") pop-up, adjustable arc, BSP inlet threads
I-40-04-SS - ON-R - B - 25	10 cm (4") pop-up, adjustable arc, full circle opposing nozzles, reclaimed water ID, BSP inlet threads, and #25 nozzle
I-40-06-SS - B - 43	15 cm (6") pop-up, adjustable arc, BSP inlet threads, and #43 nozzle

ROTORS

I-40 CHARTS



I-40 Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
40	2.5	250	13.4	1.52	25.4	17	20
	3.0	300	13.7	1.68	28.0	18	21
	3.5	350	14.0	1.80	30.0	18	21
	4.0	400	14.0	1.92	32.0	20	23
	4.5	450	14.0	2.03	33.8	21	24
	5.0	500	14.3	2.13	35.5	21	24
41	3.0	300	14.9	2.16	36.0	19	22
	3.5	350	15.2	2.33	38.9	20	23
	4.0	400	15.5	2.49	41.5	21	24
	4.5	450	15.5	2.64	44.1	22	25
	5.0	500	15.8	2.79	46.5	22	26
	5.5	550	16.2	2.95	49.1	23	26
42	3.0	300	15.2	2.37	39.4	20	24
	3.5	350	15.5	2.54	42.4	21	24
	4.0	400	16.2	2.71	45.2	21	24
	4.5	450	16.5	2.87	47.8	21	24
	5.0	500	16.8	3.01	50.2	21	25
	5.5	550	17.1	3.17	52.9	22	25
43	3.0	300	16.8	2.87	47.9	20	24
	3.5	350	17.1	3.11	51.8	21	25
	4.0	400	17.4	3.33	55.6	22	26
	4.5	450	17.7	3.55	59.1	23	26
	5.0	500	18.0	3.75	62.4	23	27
	5.5	550	18.6	3.97	66.1	23	26
44	4.0	400	19.2	4.47	74.4	24	28
	4.5	450	19.5	4.75	79.1	25	29
	5.0	500	19.8	5.02	83.6	26	30
	5.5	550	20.1	5.31	88.5	26	30
	6.0	600	20.1	5.56	92.6	27	32
	6.5	650	20.4	5.80	96.6	28	32
45	4.0	400	20.1	5.07	84.4	25	29
	4.5	450	20.4	5.38	89.7	26	30
	5.0	500	20.7	5.68	94.7	26	31
	5.5	550	21.0	6.01	100.2	27	31
	6.0	600	21.3	6.28	104.7	28	32
	6.5	650	21.6	6.55	109.1	28	32

I-40 High Speed Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
40	2.5	250	13.4	1.52	25.4	17	20
	3.0	300	13.7	1.68	28.0	18	21
	3.5	350	14.0	1.80	30.0	18	21
	4.0	400	14.0	1.92	32.0	20	23
	4.5	450	14.0	2.03	33.8	21	24
	5.0	500	14.3	2.13	35.5	21	24
41	3.0	300	13.1	2.16	36.0	25	29
	3.5	350	13.4	2.33	38.9	26	30
	4.0	400	13.4	2.49	41.5	28	32
	4.5	450	13.4	2.64	44.1	29	34
	5.0	500	13.7	2.79	46.5	30	34
	5.5	550	14.0	2.95	49.1	30	35
42	3.0	300	13.7	2.37	39.4	25	29
	3.5	350	14.0	2.54	42.4	26	30
	4.0	400	14.3	2.71	45.2	26	30
	4.5	450	14.6	2.87	47.8	27	31
	5.0	500	14.9	3.01	50.2	27	31
	5.5	550	15.2	3.17	52.9	27	32
43	3.0	300	14.9	2.87	47.9	26	30
	3.5	350	15.5	3.11	51.8	26	30
	4.0	400	15.8	3.33	55.6	27	31
	4.5	450	15.8	3.55	59.1	28	33
	5.0	500	15.8	3.75	62.4	30	34
	5.5	550	16.2	3.97	66.1	30	35
44	4.0	400	17.7	4.47	74.4	29	33
	4.5	450	17.7	4.75	79.1	30	35
	5.0	500	17.7	5.02	83.6	32	37
	5.5	550	18.3	5.31	88.5	32	37
	6.0	600	18.3	5.56	92.6	33	38
	6.5	650	18.3	5.80	96.6	35	40
45	4.0	400	18.3	5.07	84.4	30	35
	4.5	450	18.6	5.38	89.7	31	36
	5.0	500	18.9	5.68	94.7	32	37
	5.5	550	19.5	6.01	100.2	32	36
	6.0	600	19.8	6.28	104.7	32	37
	6.5	650	19.8	6.55	109.1	33	39

I-40 Dual Opposing Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
15 Gray	3.0	300	15.2	2.75	45.8	12	14
	3.5	350	15.8	2.91	48.5	12	13
	4.0	400	16.2	3.06	51.0	12	14
	4.5	450	16.8	3.20	53.3	11	13
	5.0	500	17.1	3.32	55.4	11	13
	5.5	550	17.4	3.46	57.7	11	13
18 Red	3.0	300	17.4	2.90	48.3	10	11
	3.5	350	17.7	3.15	52.5	10	12
	4.0	400	18.0	3.38	56.4	10	12
	4.5	450	18.0	3.61	60.1	11	13
	5.0	500	18.3	3.82	63.7	11	13
	5.5	550	18.9	4.05	67.5	11	13
20 Dk. Brown	4.0	400	18.9	4.26	71.1	12	14
	4.5	450	19.2	4.54	75.6	12	14
	5.0	500	19.5	4.80	80.0	13	15
	5.5	550	20.1	5.08	84.7	13	15
	6.0	600	19.8	5.32	88.7	14	16
	6.5	650	20.1	5.55	92.5	14	16

I-40 Dual Opposing Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
23 Dk. Green	4.0	400	19.5	4.55	75.8	12	14
	4.5	450	19.8	4.85	80.8	12	14
	5.0	500	20.1	5.14	85.6	13	15
	5.5	550	20.4	5.45	90.8	13	15
	6.0	600	20.7	5.71	95.1	13	15
	6.5	650	20.7	5.96	99.4	14	16
25 Dk. Blue	4.0	400	20.1	4.92	82.1	12	14
	4.5	450	20.4	5.23	87.2	13	14
	5.0	500	20.7	5.52	92.0	13	15
	5.5	550	21.0	5.84	97.3	13	15
	6.0	600	21.3	6.10	101.7	13	15
	6.5	650	21.3	6.36	106.0	14	16
28 Black	4.5	450	21.0	6.38	106.4	14	17
	5.0	500	21.3	6.68	111.3	15	17
	5.5	550	21.9	7.00	116.7	15	17
	6.0	600	22.3	7.27	121.1	15	17
	6.5	650	22.6	7.52	125.3	15	17
	7.0	700	23.2	7.76	129.4	14	17

* Factory-installed nozzle

Note: All precipitation rates are calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2. Precipitation rates for the ON model are calculated at 360 degrees.

I-60

APPLICATION
Low Pressure Commercial/
Municipal

RADIUS
14.9 to 20.4 m

FLOW RATES
1.41 to 4.87 m³/hr
23.5 to 81.2 l/min

THE I-60 IS IDEAL FOR LARGE-AREA TURF SITES WITH LOWER PRESSURES.

FEATURES

- Model (stainless riser): 10 cm
- Arc setting:
ADS: 40–360 degrees
36S: full-circle only
- Nozzle choices: 6
- Nozzle choices: #7 to #20
- Standard factory installed nozzle: #13
- Factory installed rubber cover
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 5 years

ADVANCED FEATURES

- Colour coded nozzles
- Reclaimed water ID (optional)
- Stainless steel riser
- Drain check valve (up to 3 m of elevation)
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 14.9 to 20.4 m
Flow rate: 1.41 to 4.87 m³/hr; 23.5 to 81.2 l/min
Recommended pressure range: 2.5 to 4.5 bar; 250 to 450 kPa
Operating pressure range: 2.8 to 7 bar; 280 to 700 kPa
Precipitation rates: 10 mm/hr approx.
Nozzle trajectory: 25 degrees

FACTORY INSTALLED OPTIONS

Nozzles: #7 to #20
Reclaimed water ID cover



I-60: Overall height: ADS/36S: 21 cm
Pop-up height: 10 cm
Exposed diameter: 5 cm
Inlet size: 1" female NPT or BSP



SPECIFICATIONBUILDER

www.hunterindustries.com/I60

MODELS	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-60 = 10 cm (4") pop-up	Stainless steel riser, check valve, and 6 nozzles	ADS, ARS, 36S, 3RS, B	#7 to #20 = Factory installed nozzle number

EXAMPLES

I-60 - ADS - B	10 cm (4") pop-up, adjustable arc, BSP inlet threads, and #13 nozzle
I-60 - 36S - B - 10	10 cm (4") pop-up, full circle, BSP inlet threads, and #10 nozzle
I-60 - 3RS - B - 7	10 cm (4") pop-up, full circle, reclaimed water ID, BSP inlet threads, and #7 nozzle

ROTORS

I-60 CHARTS



I-60 ADS Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
7 Orange	2.5	250	14.9	1.41	23.5	13	15
	3.0	300	15.5	1.53	25.6	13	15
	3.5	350	15.8	1.63	27.2	13	15
	4.0	400	16.5	1.72	28.7	13	15
	4.5	450	16.5	1.80	30.1	13	15
10 Lt. Green	2.5	250	15.8	1.85	30.8	15	17
	3.0	300	16.5	2.02	33.7	15	17
	3.5	350	17.1	2.16	36.0	15	17
	4.0	400	17.7	2.29	38.2	15	17
	4.5	450	17.7	2.41	40.2	15	18
13 Lt. Blue*	2.5	250	16.8	2.27	37.8	16	19
	3.0	300	17.4	2.53	42.1	17	19
	3.5	350	17.7	2.73	45.5	17	20
	4.0	400	18.3	2.93	48.8	17	20
	4.5	450	18.3	3.11	51.8	19	21
15 Gray	2.5	250	17.4	2.70	45.1	18	21
	3.0	300	18.0	2.97	49.5	18	21
	3.5	350	18.3	3.18	53.0	19	22
	4.0	400	18.6	3.38	56.3	20	23
	4.5	450	18.9	3.56	59.4	20	23
18 Red	2.5	250	17.7	3.40	56.7	22	25
	3.0	300	18.3	3.71	61.9	22	26
	3.5	350	18.9	3.96	66.0	22	26
	4.0	400	19.5	4.19	69.8	22	25
	4.5	450	19.8	4.40	73.4	22	26
20 Dk. Brown	2.5	250	18.6	3.82	63.7	22	26
	3.0	300	19.2	4.12	68.7	22	26
	3.5	350	19.5	4.36	72.7	23	26
	4.0	400	19.8	4.58	76.3	23	27
	4.5	450	20.1	4.78	79.7	24	27

I-60 36S Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
7 Orange	2.5	250	15.2	1.41	23.5	6	7
	3.0	300	15.8	1.56	26.1	6	7
	3.5	350	16.5	1.69	28.1	6	7
	4.0	400	16.8	1.80	30.1	6	7
	4.5	450	17.4	1.91	31.9	6	7
10 Lt. Green	2.5	250	15.8	1.85	30.8	7	8
	3.0	300	16.5	2.02	33.7	7	9
	3.5	350	17.1	2.16	36.0	7	9
	4.0	400	17.4	2.29	38.2	8	9
	4.5	450	18.0	2.41	40.2	7	9
13 Lt. Blue*	2.5	250	16.8	2.29	38.1	8	9
	3.0	300	17.1	2.55	42.4	9	10
	3.5	350	17.7	2.76	45.9	9	10
	4.0	400	18.0	2.95	49.2	9	11
	4.5	450	18.6	3.14	52.3	9	10
15 Gray	2.5	250	17.4	2.71	45.2	9	10
	3.0	300	17.7	2.98	49.6	10	11
	3.5	350	18.3	3.19	53.2	10	11
	4.0	400	18.6	3.39	56.5	10	11
	4.5	450	18.9	3.57	59.5	10	12
18 Red	2.5	250	17.7	3.39	56.5	11	13
	3.0	300	18.0	3.73	62.2	12	13
	3.5	350	18.9	4.00	66.7	11	13
	4.0	400	19.5	4.26	70.9	11	13
	4.5	450	19.8	4.49	74.9	11	13
20 Dk. Brown	2.5	250	18.6	3.79	63.2	11	13
	3.0	300	18.9	4.13	68.8	12	13
	3.5	350	19.5	4.40	73.3	12	13
	4.0	400	19.8	4.64	77.4	12	14
	4.5	450	20.4	4.87	81.2	12	13

* Factory-installed nozzle

Note: All precipitation rates calculated for 180-degree operation. For the precipitation rate for a 360-degree sprinkler, divide by 2. Precipitation rates for the 36S model are calculated at 360 degrees.

APPLICATION

**Large Radius Commercial/
Municipal**

RADIUS

18.9 to 30.8 m

FLOW RATES

**4.97 to 18.58 m³/hr
82.8 to 309.6 l/min**

I-90

HUNTER'S LONGEST DISTANCE ROTOR IS PERFECT FOR PARKS AND SPORTS FIELDS.

FEATURES

- Model: 9 cm
- Arc setting: 40 to 360 degrees, 360 degrees
- Nozzle choices: 8
- Nozzle choices: #25 to #73
- Standard factory installed nozzle: #53
- Factory installed rubber logo cap
- Through-the-top arc adjustment
- Quick check arc mechanism
- Water lubricated gear-drive
- Warranty period: 5 years

ADVANCED FEATURES

- Colour coded nozzles
- Reclaimed water ID (optional)
- Opposing nozzle 360° model
- Drain check valve (up to 2.75 m of elevation)
- = Detailed descriptions on pages 10 and 11

OPERATING SPECIFICATIONS

Radius: 18.9 to 30.8 m
 Flow rate: 4.97 to 18.58 m³/hr; 82.8 to 309.6 l/min
 Recommended pressure range: 4.0 to 7.5 bar; 400 to 750 kPa
 Operating pressure range: 3.5 to 8 bar; 350 to 800 kPa
 Precipitation rates: 19 mm/hr approx.
 Nozzle trajectory: 22.5 degrees

FACTORY INSTALLED OPTIONS

Nozzles: #25 to #73

USER INSTALLED OPTIONS

Rubber Cover Kit I90-ADV (P/N 234200)
 Rubber Cover Kit I90-36V (P/N 234201)
 Turf Cup Kit (P/N 467955)



I-90: Overall height: ADV/36V: 28 cm
 Exposed diameter: 9 cm
 Inlet size: 1½" female NPT or BSP



Turf cup kit (P/N 467955)



Rubber cover kits
 (P/N 234200, P/N 234201)



SPECIFICATIONBUILDER

www.hunterindustries.com/I90

MODEL	STANDARD FEATURES	FEATURE OPTIONS	NOZZLE OPTIONS
I-90 = 8 cm (3") pop-up	Plastic riser, check valve, and 8 nozzles	ADV, ARV, 36V, 3RV, B ADV = Adjustable arc ARV = Adjustable arc and reclaimed water ID 36V = Full circle, opposing nozzles 3RV = Full circle, opposing nozzles and reclaimed water ID B = BSP inlet threads	#25 to #73 = Factory installed nozzle number

EXAMPLES

I-90 - ADV - B	8 cm (3") pop-up, adjustable arc, with BSP inlet threads
I-90 - 36V - B - 43	8 cm (3") pop-up, full circle, opposing nozzles, BSP inlet threads, and #43 nozzle
I-90 - 3RV - B - 63	8 cm (3") pop-up, full circle, opposing nozzles, reclaimed water ID, BSP inlet threads, and #63 nozzle

ROTORS

I-90 CHARTS



I-90-ADV Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
25 Lt. Blue NEW	4.0	400	18.9	4.97	82.8	28	32
	4.5	450	19.2	5.34	89.0	29	33
	5.0	500	19.5	5.70	95.0	30	35
	5.5	550	19.8	6.10	101.6	31	36
	6.0	600	20.1	6.43	107.2	32	37
	6.5	650	20.4	6.76	112.7	32	37
	7.0	700	20.7	7.08	117.9	33	38
33 Gray	4.0	400	20.1	6.84	114.1	34	39
	4.5	450	20.4	7.25	120.9	35	40
	5.0	500	20.4	7.64	127.4	37	42
	5.5	550	20.7	8.06	134.4	38	43
	6.0	600	20.7	8.42	140.3	39	45
	6.5	650	21.0	8.75	145.9	40	46
	7.0	700	21.3	9.08	151.3	40	46
38 Red	4.0	400	20.7	7.61	126.8	35	41
	4.5	450	21.0	8.07	134.5	37	42
	5.0	500	21.3	8.51	141.9	37	43
	5.5	550	21.9	8.99	149.8	37	43
	6.0	600	22.3	9.39	156.5	38	44
	6.5	650	22.6	9.77	162.9	38	44
	7.0	700	22.9	10.14	169.0	39	45
43 Dk. Brown	4.0	400	21.0	8.72	145.4	39	46
	4.5	450	21.3	9.18	153.0	40	47
	5.0	500	21.6	9.62	160.2	41	47
	5.5	550	21.9	10.08	168.0	42	48
	6.0	600	21.9	10.47	174.5	43	50
	6.5	650	22.3	10.84	180.7	44	51
	7.0	700	22.3	11.20	186.6	45	52
48 Dk. Green	5.0	500	22.9	10.83	180.4	41	48
	5.5	550	23.5	11.41	190.1	41	48
	6.0	600	23.8	11.89	198.1	42	49
	6.5	650	24.1	12.35	205.8	43	49
	7.0	700	24.7	12.79	213.2	42	48
53 Dk. Blue*	5.0	500	24.1	11.29	188.2	39	45
	5.5	550	24.7	12.00	200.0	39	45
	6.0	600	25.6	12.59	209.9	38	44
	6.5	650	26.2	13.17	219.4	38	44
	7.0	700	26.2	13.72	228.7	40	46
63 Black	5.0	500	25.6	13.95	232.5	43	49
	5.5	550	26.2	14.52	241.9	42	49
	6.0	600	26.5	14.98	249.7	43	49
	6.5	650	26.8	15.43	257.1	43	50
	7.0	700	27.4	15.85	264.2	42	49
73 Orange NEW	5.5	550	27.4	15.22	253.7	40	47
	6.0	600	27.7	15.69	261.4	41	47
	6.5	650	28.3	16.13	268.8	40	46
	7.0	700	29.0	16.55	275.8	39	46
	7.5	750	29.9	17.01	283.5	38	44

I-90-36V Nozzle Performance Data – Metric

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
25 Lt. Blue NEW	4.0	400	20.7	5.70	94.9	13	15
	4.5	450	21.0	6.06	101.1	14	16
	5.0	500	21.6	6.42	106.9	14	16
	5.5	550	22.3	6.80	113.3	14	16
	6.0	600	22.6	7.12	118.7	14	16
	6.5	650	22.9	7.43	123.9	14	16
	7.0	700	23.5	7.73	128.9	14	16
33 Gray	4.0	400	21.3	6.65	110.8	15	17
	4.5	450	21.9	7.05	117.4	15	17
	5.0	500	22.6	7.43	123.7	15	17
	5.5	550	23.2	7.84	130.6	15	17
	6.0	600	23.5	8.18	136.3	15	17
	6.5	650	23.8	8.51	141.8	15	17
	7.0	700	24.4	8.83	147.1	15	17
38 Red	4.0	400	22.3	7.45	124.2	15	17
	4.5	450	22.9	7.89	131.4	15	17
	5.0	500	23.8	8.29	138.2	15	17
	5.5	550	24.1	8.74	145.6	15	17
	6.0	600	24.1	9.10	151.7	16	18
	6.5	650	24.4	9.46	157.6	16	18
	7.0	700	25.0	9.80	163.3	16	18
43 Dk. Brown	4.0	400	23.2	8.51	141.9	16	18
	4.5	450	23.8	8.99	149.9	16	18
	5.0	500	24.1	9.45	157.4	16	19
	5.5	550	25.0	9.94	165.6	16	18
	6.0	600	25.0	10.35	172.4	17	19
	6.5	650	25.3	10.74	178.9	17	19
	7.0	700	25.6	11.11	185.2	17	20
48 Dk. Green	5.0	500	25.0	10.69	178.1	17	20
	5.5	550	26.2	11.24	187.2	16	19
	6.0	600	26.8	11.69	194.9	16	19
	6.5	650	27.1	12.13	202.1	16	19
	7.0	700	27.4	12.55	209.2	17	19
53 Dk. Blue*	5.0	500	25.9	11.62	193.6	17	20
	5.5	550	26.8	12.21	203.6	17	20
	6.0	600	27.1	12.71	211.8	17	20
	6.5	650	27.7	13.19	219.7	17	20
	7.0	700	28.0	13.64	227.4	17	20
63 Black	5.0	500	27.4	13.85	230.8	18	21
	5.5	550	28.0	14.41	240.2	18	21
	6.0	600	28.3	14.87	247.9	19	21
	6.5	650	28.7	15.31	255.2	19	22
	7.0	700	29.3	15.73	262.2	18	21
73 Orange NEW	5.5	550	29.0	16.51	275.2	20	23
	6.0	600	29.3	17.05	284.1	20	23
	6.5	650	29.6	17.56	292.6	20	23
	7.0	700	30.2	18.05	300.7	20	23
	7.5	750	30.8	18.58	309.6	20	23

* Factory-installed nozzle

Note: All ADV precipitation rates are calculated for 180-degree operation. For the precipitation rate for a 360-degree sprinkler, divide by 2. Precipitation rates for the 36V model are calculated at 360 degrees.

A close-up, black and white photograph of a textured surface, likely a tire tread or a similar industrial material. The surface is embossed with various patterns and letters. On the left, there is a circular gear-like pattern with sharp teeth. To the right, the word "PRO-SPRAY" is embossed in large, bold, capital letters. The lighting creates strong highlights and shadows, emphasizing the texture and the three-dimensional quality of the embossing.

RESETTING THE STANDARD. Hunter sprays have been an industry benchmark for years, a lofty goal that has been reimaged over and over. From the conservation-minded MP Rotator to the multi-talented family of Pro-Sprays, Hunter's line of sprays doesn't know where to stop.

SPRAYS

COMPARISON CHART

	PS ULTRA	PRO- SPRAY®	PRS30*	PRS40†
APPLICATIONS				
Turfgrass	•	•	•	•
Turfgrass: Tall mowing height	•	•	•	•
Ground cover	•	•	•	•
Shrubs: Sprinklers on risers	•	•	•	•
Shrubs: Tall pop-up sprinklers		•	•	•
Residential	•	•	•	•
Commercial		•	•	•
High traffic areas		•	•	•
Reclaimed water		•	•	•
Field-installed check valve option	•	•	•	•
Factory-installed check valve option		•	•	•
Pressure regulation			•	•

* Formerly Institutional Spray

† Formerly MPR40

ADVANCED FEATURES

CO-MOLDED WIPER SEAL

This pressure-activated, multi-function wiper seal was designed to reduce flow-by. The zero flush seal operates at low pressures and allows more sprinkler heads on the same zone. The wiper seal's design protects the riser when operating, and keeps debris out of the seal when retracted, reducing riser stick-ups.



BODY CAP WON'T LEAK UNDER HIGH PRESSURE

The Pro-Spray line incorporates a heavy-duty ribbed body and durable cap engineered to withstand the harshest environments, including the rigors of foot traffic and the abuses of heavy machinery. In addition, a multi-thread buttress design provides superior strength in cap-to-body gripping capacity helping the head to withstand high inlet surge pressures.



Competitor

Pro-Spray

HEAVY-DUTY SPRING

The strongest retraction spring for positive retraction under any conditions.



PRESSURE REGULATED TO 2.1/2.8 BAR

Hunter's pressure regulated pop-up sprays are calibrated for the needs of any installation. The PRS30 with the brown cap optimizes performance of your traditional sprays at 2.1 bar. The grey-capped PRS40 is designed for the efficient MP Rotator and is the only 2.8 bar regulated pop-up on the market today.



ALL SPRAY BODIES AND NOZZLES are put to the test at Hunter's state-of-the-art facility so they are ready to take on any obstacle in the field.

Hunter®

PS ULTRA

APPLICATION

Residential

MODELS

5 cm, 10 cm, 15 cm

PS ULTRA IS THE SLIM SPRAY WITH ALL THE FEATURES FOR ANY INSTALLATION.

FEATURES

- Application: Residential
- Models: 5 cm, 10 cm, 15 cm
- Nozzle choices: 5
- Flow rate: 0.04 to 1.22 m³/hr
- Nozzle choices: 3.0 m, 3.7 m, 4.6 m, 5.2 m
1.5 X 9.1 m side strip (side strip pattern available on 5 and 10 cm models only)
- Warranty period: 2 years

ADVANCED PS ULTRA FEATURES

- Preinstalled Pro Adjustable nozzle
- Enhanced cap for more durability, easier handling, and extended riser seal life
- 5 cm and 10 cm models can retro-fit into older style PS sprays
- Two-piece ratchet
- Male threaded riser to accept all female nozzles
- Available with flush plug (large filter screen not included)
- Extra large filter screen

OPERATING SPECIFICATIONS

Flow rate: 0.63 to 20.4 l/min
 Radius: 2.5 to 9.1 m
 Recommended pressure range:
 1.4 to 4.8 bar; 140 to 480 kPa
 Precipitation rates: 43 mm/hr approx.

FACTORY INSTALLED OPTIONS

Nozzles: 3.0 m, 3.7 m, 4.6 m, 5.2 m,
 1.5 X 9.1 m Side strip
 Flush plug (large basket filter screen not included)

ADVANCED PRO ADJUSTABLE NOZZLE FEATURES

- Crisp edges result in well defined pattern
- Easy grip top for simple adjustments
- Large water droplets that can handle light winds
- Even distribution results in beautiful pattern
- Matched precipitation rate throughout nozzles

USER INSTALLED OPTIONS

Drain check valve: 10 cm and 15 cm models
 (up to 2 m of elevation; P/N 462237)
 Large basket filter screen
 (replacement; P/N 162900)

PSU02: Overall height: 12.7 cm
 Exposed diameter: 3 cm
 Inlet size: ½" Female NPT

PSU04: Overall height: 18.4 cm
 Exposed diameter: 3 cm
 Inlet size: ½" Female NPT

PSU06: Overall height: 24.1 cm
 Exposed diameter: 3 cm
 Inlet size: ½" Female NPT

SPECIFICATIONBUILDER

www.hunterindustries.com/PSULTRA

MODELS	RADIUS
PSU-02 = 5 cm (2") pop-up	10A = 3.0 m (10') adjustable nozzle
PSU-04 = 10 cm (4") pop-up	12A = 3.7 m (12') adjustable nozzle
PSU-06 = 15 cm (6") pop-up	15A = 4.6 m (15') adjustable nozzle
	17A = 5.2 m (17') adjustable nozzle
	5SS = 1.5 m x 9.0 m (5' X 30') side strip (5 cm and 10 cm only)

EXAMPLES

PSU-04 - 15A	10 cm (4") pop-up, with a 4.6 m (15') adjustable nozzle
PSU-02 - 5SS	5 cm (2") pop-up, with a 1.5 m x 9.0 m (5' X 30') side strip
PSU-06 - 10A	15 cm (6") pop-up, with a 3.0 m (10') adjustable nozzle

PS ULTRA CHART

SPRAYS

PS Ultra Standard Nozzles Performance Data – Metric

Arc	Pressure		3.0 m Radius Adjustable from 0° to 360° Trajectory: 15° Color Code: Red					3.7 m Radius Adjustable from 0° to 360° Trajectory: 28° Color Code: Green					4.6 m Radius Adjustable from 0° to 360° Trajectory: 28° Color Code: Black					5.2 m Radius Adjustable from 0° to 360° Trajectory: 28° Color Code: Gray				
	Bar	kPa	Flow		Precip mm/hr	Nozzle	Flow		Precip mm/hr	Nozzle	Flow		Precip mm/hr	Nozzle	Flow		Precip mm/hr	Nozzle				
			m³/hr	l/min			m³/hr	l/min			m³/hr	l/min			m³/hr	l/min						
45°	1.0	100	2.1	0.04	0.63	68	79	2.7	0.05	0.81	53	61	3.4	0.07	1.19	50	57	4.7	0.09	1.54	33	39
	1.5	150	2.4	0.05	0.79	66	76	3.2	0.06	1.01	47	55	3.9	0.09	1.49	47	54	4.9	0.12	1.93	38	44
	2.0	200	3.0	0.06	0.92	49	57	3.7	0.07	1.18	42	48	4.6	0.10	1.75	40	46	5.2	0.14	2.26	40	46
	2.1	210	3.3	0.06	0.95	42	48	4.0	0.07	1.22	36	42	4.9	0.11	1.80	36	41	5.5	0.14	2.32	37	42
	2.5	250	3.5	0.06	1.04	41	47	4.2	0.08	1.34	36	42	5.2	0.12	1.98	35	40	5.7	0.15	2.55	38	43
90°	1.0	100	2.1	0.08	1.26	68	79	2.7	0.10	1.62	53	61	3.4	0.14	2.39	50	57	4.7	0.18	3.08	33	39
	1.5	150	2.4	0.09	1.57	66	76	3.2	0.12	2.02	47	55	3.9	0.18	2.89	47	54	4.9	0.23	3.85	38	44
	2.0	200	3.0	0.11	1.84	49	57	3.7	0.14	2.37	42	48	4.6	0.21	3.50	40	46	5.2	0.27	4.51	40	46
	2.1	210	3.3	0.11	1.89	42	48	4.0	0.15	2.43	36	42	4.9	0.22	3.59	36	41	5.5	0.28	4.63	37	42
	2.5	250	3.5	0.12	2.08	41	47	4.2	0.16	2.68	36	42	5.2	0.24	3.95	35	40	5.7	0.31	5.10	38	43
120°	1.0	100	2.1	0.10	1.68	68	79	2.7	0.13	2.16	53	61	3.4	0.19	3.18	50	57	4.7	0.25	4.11	33	39
	1.5	150	2.4	0.13	2.10	66	76	3.2	0.16	2.70	47	55	3.9	0.24	3.98	47	54	4.9	0.31	5.13	38	44
	2.0	200	3.0	0.15	2.46	49	57	3.7	0.19	3.16	42	48	4.6	0.28	4.66	40	46	5.2	0.36	6.01	40	46
	2.1	210	3.3	0.15	2.52	42	48	4.0	0.19	3.24	36	42	4.9	0.29	4.79	36	41	5.5	0.37	6.18	37	42
	2.5	250	3.5	0.17	2.78	41	47	4.2	0.21	3.57	36	42	5.2	0.32	5.27	35	40	5.7	0.41	6.80	38	43
180°	1.0	100	2.1	0.15	2.52	68	79	2.7	0.19	3.23	53	61	3.4	0.29	4.77	50	57	4.7	0.37	6.16	33	39
	1.5	150	2.4	0.19	3.14	66	76	3.2	0.24	4.04	47	55	3.9	0.36	5.97	47	54	4.9	0.46	7.70	38	44
	2.0	200	3.0	0.22	3.68	49	57	3.7	0.28	4.74	42	48	4.6	0.42	6.99	40	46	5.2	0.54	9.02	40	46
	2.1	210	3.3	0.23	3.78	42	48	4.0	0.29	4.86	36	42	4.9	0.43	7.18	36	41	5.5	0.56	9.27	37	42
	2.5	250	3.5	0.25	4.16	41	47	4.2	0.32	5.35	36	42	5.2	0.47	7.90	35	40	5.7	0.61	10.20	38	43
240°	1.0	100	2.1	0.20	3.35	68	79	2.7	0.26	4.31	53	61	3.4	0.38	6.37	50	57	4.7	0.49	8.21	33	39
	1.5	150	2.4	0.25	4.19	66	76	3.2	0.32	5.39	47	55	3.9	0.48	7.96	47	54	4.9	0.62	10.27	38	44
	2.0	200	3.0	0.29	4.91	49	57	3.7	0.38	6.31	42	48	4.6	0.56	9.32	40	46	5.2	0.72	12.03	40	46
	2.1	210	3.3	0.30	5.04	42	48	4.0	0.39	6.49	36	42	4.9	0.57	9.57	36	41	5.5	0.74	12.35	37	42
	2.5	250	3.5	0.33	5.55	41	47	4.2	0.43	7.14	36	42	5.2	0.63	10.54	35	40	5.7	0.82	13.60	38	43
270°	1.0	100	2.1	0.23	3.77	68	79	2.7	0.29	4.85	53	61	3.4	0.43	7.16	50	57	4.7	0.55	9.24	33	39
	1.5	150	2.4	0.28	4.72	66	76	3.2	0.36	6.06	47	55	3.9	0.54	8.95	47	54	4.9	0.69	11.55	38	44
	2.0	200	3.0	0.33	5.52	49	57	3.7	0.43	7.10	42	48	4.6	0.63	10.49	40	46	5.2	0.81	13.53	40	46
	2.1	210	3.3	0.34	5.68	42	48	4.0	0.44	7.30	36	42	4.9	0.65	10.77	36	41	5.5	0.83	13.90	37	42
	2.5	250	3.5	0.37	6.25	41	47	4.2	0.48	8.03	36	42	5.2	0.71	11.86	35	40	5.7	0.92	15.30	38	43
360°	1.0	100	2.1	0.30	5.03	68	79	2.7	0.39	6.47	53	61	3.4	0.57	9.55	50	57	4.7	0.74	12.32	33	39
	1.5	150	2.4	0.38	6.29	66	76	3.2	0.49	8.09	47	55	3.9	0.72	11.94	47	54	4.9	0.92	15.40	38	44
	2.0	200	3.0	0.44	7.37	49	57	3.7	0.57	9.47	42	48	4.6	0.84	13.98	40	46	5.2	1.08	18.04	40	46
	2.1	210	3.3	0.45	7.57	42	48	4.0	0.58	9.73	36	42	4.9	0.86	14.36	36	41	5.5	1.11	18.53	37	42
	2.5	250	3.5	0.50	8.33	41	47	4.2	0.64	10.71	36	42	5.2	0.95	15.81	35	40	5.7	1.22	20.40	38	43

Note: Optimum nozzle performance shown in bold.

Strip Pattern Nozzle Performance Data – Metric

Color Code: Blue

Nozzle Model	Pressure		Width x Length	Flow	
	Bar	kPa		m³/hr	l/min
SS-530 Side Strip	1.0	100	2.2 m x 8.5 m	0.21	3.5
	1.5	150	2.4 m x 8.5 m	0.25	4.2
	2.0	200	1.5 m x 9.0 m	0.29	4.9
	2.1	210	1.5 m x 9.0 m	0.30	5.0
	2.5	250	1.5 m x 9.0 m	0.33	5.5

PRO-SPRAY®

APPLICATION

Residential/Commercial

MODELS

Shrub, 5 cm, 7.5 cm, 10 cm, 15 cm, 30 cm

RESIDENTIAL OR COMMERCIAL, THIS VERSATILE SPRINKLER IS THE CONTRACTOR'S CHOICE.

FEATURES

- Application: Residential/commercial
- Models: Shrub, 5 cm, 7.5 cm, 10 cm, 15 cm, 30 cm
- No side inlet (NSI) version available in 15 cm and 30 cm
- Warranty period: 5 years

ADVANCED FEATURES

- Co-molded wiper seal with UV resistant material
- Body cap won't leak under high pressure
- Drain check valve (optional)
- Heavy-duty retraction spring
- Innovative directional flush plug design
- Reclaimed purple body cap (optional)
- Compatible with all female threaded nozzles

•• = Detailed description on pages 32 and 33

OPERATING SPECIFICATIONS

Recommended pressure range: 1.0 to 5 bar; 100 to 500 kPa

FACTORY INSTALLED OPTIONS

Drain check valve (up to 3 m of elevation)
Reclaimed water ID cap

USER INSTALLED OPTIONS

Drain check valve (up to 3 m of elevation;
P/N 437400)
Reclaimed water ID cap (P/N 458520)
Snap-on reclaimed cover (P/N PROSRCCAP)



WORKS BEST WITH

MP ROTATOR

PRO-SPRAY FIXED
ARC NOZZLESPRO ADJUSTABLE
NOZZLES

SPECIFICATIONBUILDER www.hunterindustries.com/PROSPRAY

STANDARD MODELS

PROS-00 = Shrub adapter
PROS-02 = 5 cm (2") pop-up
PROS-03 = 7.5 cm (3") pop-up
PROS-04 = 10 cm (4") pop-up
PROS-06 = 15 cm (6") pop-up
PROS-06-NSI = 15 cm (6") pop-up with no side inlet
PROS-12 = 30 cm (12") pop-up
PROS-12-NSI = 30 cm (12") pop-up with no side inlet


OPTIONS

(blank) = No option
CV = Factory-installed drain check valve (pop-up models only)
CV-R = Factory-installed reclaimed body cap (shrub molded in purple)


15 cm and 30 cm models ordered as CV will come as no side inlet

EXAMPLES

PRO-04 - 10A	10 cm (4") pop-up, and 10A nozzle
PRO-06 - CV - 12H	15 cm (6") pop-up, drain check valve, and 12H nozzle
PRO-12 - CV-R - RCS	30 cm (12") pop-up, drain check valve, reclaimed body cap, and right corner strip

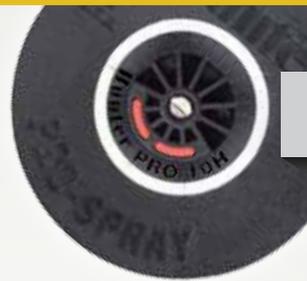

PROS-00:
Inlet size: ½" Female

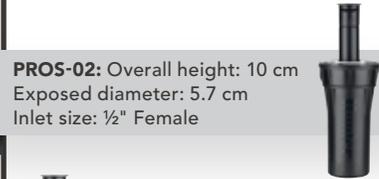

PROS-02: Overall height: 10 cm
Exposed diameter: 5.7 cm
Inlet size: ½" Female



PROS-03: Overall height: 12.5 cm
Exposed diameter: 5.7 cm
Inlet size: ½" Female



PROS-04: Overall height: 15.5 cm
Exposed diameter: 5.7 cm
Inlet size: ½" Female



PROS-06: Overall height: 22.5 cm
PROS-06-NSI (right):
Exposed diameter: 5.7 cm
Inlet size: ½" Female



PROS-12: Overall height 41 cm
PROS-12-NSI (right)
Exposed diameter: 5.7 cm
Inlet size: ½" Female

PRS30

APPLICATION

Residential/Commercial

MODELS

Shrub, 10 cm, 15 cm, 30 cm

KEEP WATER PRESSURE CONSISTENT FOR COMMERCIAL SITES TO REDUCE WASTE AND MAXIMIZE PERFORMANCE.

FEATURES

- Application: Residential/commercial
- Models: Shrub, 10 cm, 15 cm, 30 cm
- No side inlet (NSI) version available in 15 cm and 30 cm
- Warranty period: 5 years

ADVANCED FEATURES

- Identification cap is brown for easy field ID
 - Pressure regulated to 2.1 bar; 210 kPa
 - Co-molded wiper seal with UV resistant material
 - Body cap won't leak under high pressure
 - Drain check valve (optional)
 - Heavy-duty retraction spring
 - Innovative directional flush plug design
 - Reclaimed purple body cap (optional)
 - Compatible with all female threaded nozzles
- = Detailed description on pages 32 and 33

OPERATING SPECIFICATIONS

Recommended pressure range: 1.0 to 7 bar; 100 to 700 kPa

FACTORY INSTALLED OPTIONS

Drain check valve (up to 4.3 m of elevation)
Reclaimed water ID cap

USER INSTALLED OPTIONS

Vandal-proof cap (P/N PROS-PRS30-VPC)
Drain check valve (up to 4.3 m of elevation; P/N 457400)
Reclaimed water ID cap (P/N 458530)
Snap-on reclaimed cover (P/N PROSRCCAP)

PRS30 formerly Institutional Spray



PRESSURE REGULATED AT 2.1 BAR



PROS-00-PRS-30:
Inlet size: 1/2" Female



PROS-04-PRS30: Overall height: 15.5 cm
Exposed diameter: 5.7 cm
Inlet size: 1/2" Female

PROS-06-PRS30: Overall height: 22.5 cm
PROS-06-PRS30-NSI (right)
Exposed diameter: 5.7 cm
Inlet size: 1/2" Female



PROS-12-PRS30: Overall height: 41 cm
PROS-12-NSI-PRS30 (right)
Exposed diameter: 5.7 cm
Inlet size: 1/2" Female



WORKS BEST WITH

PRO-SPRAY FIXED NOZZLES

PRO ADJUSTABLE NOZZLES

SPECIFICATIONBUILDER

www.hunterindustries.com/PRS30

PRS30 MODELS (formerly Institutional Spray)	OPTIONS
PROS-00-PRS30 = 2.1 bar regulated shrub adapter	(blank) = No option
PROS-04-PRS30 = 2.1 bar regulated 10 cm (4") pop-up	CV = Factory-installed drain check valve (pop-up models only)
PROS-06-PRS30 = 2.1 bar regulated 15 cm (6") pop-up	CV-R = Factory-installed drain check valve and reclaimed body cap (shrub molded in purple)
PROS-06-NSI-PRS30 = 2.1 bar regulated 15 cm (6") pop-up with no side inlet	
PROS-12-PRS30 = 2.1 bar regulated 30 cm (12") pop-up	
PROS-12-NSI-PRS30 = 2.1 bar regulated 30 cm (12") pop-up with no side inlet	15 cm and 30 cm models ordered as CV will come as no side inlet

EXAMPLES

PRO-04-PRS30	10 cm (4") pop-up regulated at 2.1 bar
PRO-06-PRS30 - CV - 12H	15 cm (6") pop-up regulated at 2.1 bar, drain check valve, and 12H nozzle
PRO-12-PRS30 - CV-R - 10A	30 cm (12") pop-up regulated at 2.1 bar, drain check valve, reclaimed body cap, and 10A nozzle

SPRAYS

PRS40

APPLICATION

Residential/Commercial

MODELS

Shrub, 10 cm, 15 cm, 30 cm

PRS40 IS DESIGNED FOR OPTIMAL PERFORMANCE WHEN PAIRED WITH THE REVOLUTIONARY MP ROTATOR.

FEATURES

- Application: Residential/commercial
- Models: Shrub, 10 cm, 15 cm, 30 cm
- No side inlet (NSI) version available in 15 cm and 30 cm
- Warranty period: 5 years

ADVANCED FEATURES

- Identification cap is grey for easy field ID
- Pressure regulated to 2.8 bar; 280 kPa
- Co-molded wiper seal with UV resistant material
- Drain check valve (up to 4.3 m of elevation)
- Body cap won't leak under high pressure
- = Detailed description on pages 32 and 33

- Heavy-duty retraction spring
- Innovative directional flush plug design
- Reclaimed purple body cap (optional)
- Compatible with all female threaded nozzles

OPERATING SPECIFICATIONS

Recommended pressure range:
1.0 to 6.9 bar, 100 to 690 kPa

FACTORY INSTALLED OPTIONS

Drain check valve (up to 4.3 m of elevation;
all models come standard with check valves)

Reclaimed water ID cap

PRS40 formerly MPR40


USER INSTALLED OPTIONS

Reclaimed water ID cap (P/N 458530)

Snap-on reclaimed cover
(P/N PROSRCCAP)

DESIGNED SPECIFICALLY FOR

MP ROTATOR

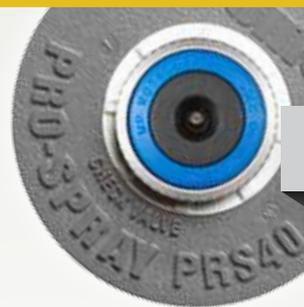

PRESSURE
REGULATED AT
2.8
BAR



PRO-00-PRS40:
Inlet size: ½" Female

PRO-04-PRS40: Overall height: 15.5 cm
Exposed diameter: 5.7 cm
Inlet size: ½" Female

PRO-06-PRS40-CV: Overall height: 22.5 cm
Exposed diameter: 5.7 cm
Inlet size: ½" Female

PRO-12-PRS40-CV: Overall height: 41 cm
Exposed diameter: 5.7 cm
Inlet size: ½" Female

SPECIFICATIONBUILDER

www.hunterindustries.com/PRS40

PRS40 MODELS (formerly MPR40)

PRO-00-PRS40 = 2.8 bar regulated shrub adapter
PRO-04-PRS40-CV = 2.8 bar regulated 10 cm (4") pop-up
PRO-06-PRS40-CV = 2.8 bar regulated 15 cm (6") pop-up
PRO-12-PRS40-CV = 2.8 bar regulated 30 cm (12") pop-up

OPTIONS

(blank) = No option
R = Factory-installed reclaimed body cap

15 cm and 30 cm models
will come as no side inlet

EXAMPLES

PRO-04-PRS40	10 cm (4") pop-up regulated at 2.8 bar
PRO-06-PRS40-CV	15 cm (6") pop-up regulated at 2.8 bar, and drain check valve
PRO-12-PRS40-CV - R	30 cm (12") pop-up regulated at 2.8 bar, drain check valve, and reclaimed body cap

NOZZLES

ANGLING FOR PERFECTION? Hunter nozzles leave site constraints behind. From narrow strips to curving hillsides, any installation will benefit from optimum distribution designed to exacting standards.

PRO ADJUSTABLE NOZZLES

PRO ADJUSTABLE NOZZLES ARE THE ALL-IN-ONE CHOICE FOR OPTIMAL COVERAGE.

FEATURES

- Crisp, well-defined edges
- Matched precipitation rate of 2.4 m to 5 m
- Easy grip top to simple adjustment
- Designed with large water droplets to withstand light winds
- Even distribution results in beautiful pattern
- New 1.2 m and 1.8 m Pro Adjustable Nozzles provide additional flexibility
- Colour-coded for easy field identification
- Adjustable from 0° to 360°

OPERATING SPECIFICATIONS

Recommended operating pressure: 2.1 bar; 210 kPa

Specify the new Pro-Spray® PRS30 pop-up for accurate pressure regulation of 2.1 bar; 210 kPa

Pro Adjustable Nozzles Performance Data – Metric

Arc	1.2 m Radius Adjustable from 0° to 360° Trajectory: 0° Color Code: Lt. Green						1.8 m Radius Adjustable from 0° to 360° Trajectory: 0° Color Code: Lt. Blue							
	Pressure		Radius m	Flow		Precip mm/hr		Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲	Bar	kPa		m ³ /hr	l/min	■	▲
45°	1.0	100	0.9	0.02	0.27	162	187	1.5	0.02	0.37	79	91		
	1.5	150	0.9	0.02	0.34	202	234	1.5	0.03	0.46	98	113		
	2.0	200	1.2	0.02	0.40	133	154	1.8	0.03	0.54	80	92		
	2.1	210	1.2	0.02	0.41	137	158	1.8	0.03	0.55	82	95		
	2.5	250	1.2	0.03	0.45	151	174	1.8	0.04	0.61	90	104		
90°	1.0	100	0.9	0.03	0.55	162	187	1.5	0.04	0.74	79	91		
	1.5	150	0.9	0.04	0.68	202	234	1.5	0.06	0.92	98	113		
	2.0	200	1.2	0.05	0.80	133	154	1.8	0.06	1.08	80	92		
	2.1	210	1.2	0.05	0.82	137	158	1.8	0.07	1.11	82	95		
	2.5	250	1.2	0.05	0.90	151	174	1.8	0.07	1.22	90	104		
120°	1.0	100	0.9	0.04	0.73	162	187	1.5	0.06	0.98	79	91		
	1.5	150	0.9	0.05	0.91	202	234	1.5	0.07	1.23	98	113		
	2.0	200	1.2	0.06	1.07	133	154	1.8	0.09	1.44	80	92		
	2.1	210	1.2	0.07	1.10	137	158	1.8	0.09	1.48	82	95		
	2.5	250	1.2	0.07	1.21	151	174	1.8	0.10	1.62	90	104		
180°	1.0	100	0.9	0.07	1.09	162	187	1.5	0.09	1.47	79	91		
	1.5	150	0.9	0.08	1.37	202	234	1.5	0.11	1.84	98	113		
	2.0	200	1.2	0.10	1.60	133	154	1.8	0.13	2.16	80	92		
	2.1	210	1.2	0.10	1.64	137	158	1.8	0.13	2.21	82	95		
	2.5	250	1.2	0.11	1.81	151	174	1.8	0.15	2.44	90	104		
240°	1.0	100	0.9	0.09	1.46	162	187	1.5	0.12	1.96	79	91		
	1.5	150	0.9	0.11	1.82	202	234	1.5	0.15	2.45	98	113		
	2.0	200	1.2	0.13	2.13	133	154	1.8	0.17	2.87	80	92		
	2.1	210	1.2	0.13	2.19	137	158	1.8	0.18	2.95	82	95		
	2.5	250	1.2	0.14	2.41	151	174	1.8	0.19	3.25	90	104		
270°	1.0	100	0.9	0.10	1.64	162	187	1.5	0.13	2.21	123	91		
	1.5	150	0.9	0.12	2.05	202	234	1.5	0.17	2.76	98	113		
	2.0	200	1.2	0.14	2.40	133	154	1.8	0.19	3.23	80	92		
	2.1	210	1.2	0.15	2.47	137	158	1.8	0.20	3.32	82	95		
	2.5	250	1.2	0.16	2.71	151	174	1.8	0.22	3.66	90	104		
360°	1.0	100	0.9	0.13	2.19	162	187	1.5	0.18	2.94	123	91		
	1.5	150	0.9	0.16	2.73	202	234	1.5	0.22	3.68	98	113		
	2.0	200	1.2	0.19	3.20	133	154	1.8	0.26	4.31	80	92		
	2.1	210	1.2	0.20	3.29	137	158	1.8	0.27	4.43	82	95		
	2.5	250	1.2	0.22	3.62	151	174	1.8	0.29	4.87	90	104		

Note: The Pro-Spray PRS30's built-in pressure regulator controls output to a maximum of 2.1 bar (210 kPa). Optimum nozzle performance shown in bold.



PRO ADJUSTABLE NOZZLES CHART

Pro Adjustable Nozzles Performance Data – Metric

Arc	2.4 m Radius Adjustable from 0° to 360° Trajectory: 0° Color Code: Brown					Nozzle 8A		3.0 m Radius Adjustable from 0° to 360° Trajectory: 15° Color Code: Red					Nozzle 10A	
	Pressure	Radius	Flow	Precip	Precip	Radius	Flow	Precip	Precip	Radius	Flow	Precip	Precip	
	Bar kPa	m	m ³ /hr l/min	mm/hr	mm/hr	m	m ³ /hr l/min	mm/hr	mm/hr	m	m ³ /hr l/min	mm/hr	mm/hr	
45°	1.0 100	1.7	0.02 0.37	62	72	2.1	0.04 0.63	68	79					
	1.5 150	2.1	0.03 0.47	51	59	2.4	0.05 0.79	66	76					
	2.0 200	2.4	0.03 0.55	46	53	3.0	0.06 0.92	49	57					
	2.1 210	2.7	0.03 0.56	37	43	3.3	0.06 0.95	42	48					
	2.5 250	2.8	0.04 0.62	38	44	3.5	0.06 1.04	41	47					
90°	1.0 100	1.7	0.04 0.75	62	72	2.1	0.08 1.26	68	79					
	1.5 150	2.1	0.06 0.93	51	59	2.4	0.09 1.57	66	76					
	2.0 200	2.4	0.07 1.09	46	53	3.0	0.11 1.84	49	57					
	2.1 210	2.7	0.07 1.12	37	43	3.3	0.11 1.89	42	48					
	2.5 250	2.8	0.07 1.24	38	44	3.5	0.12 2.08	41	47					
120°	1.0 100	1.7	0.06 1.00	62	72	2.1	0.10 1.68	68	79					
	1.5 150	2.1	0.07 1.24	51	59	2.4	0.13 2.10	66	76					
	2.0 200	2.4	0.09 1.46	46	53	3.0	0.15 2.46	49	57					
	2.1 210	2.7	0.09 1.50	37	43	3.3	0.15 2.52	42	48					
	2.5 250	2.8	0.10 1.65	38	44	3.5	0.17 2.78	41	47					
180°	1.0 100	1.7	0.09 1.49	62	72	2.1	0.15 2.52	68	79					
	1.5 150	2.1	0.11 1.87	51	59	2.4	0.19 3.14	66	76					
	2.0 200	2.4	0.13 2.19	46	53	3.0	0.22 3.68	49	57					
	2.1 210	2.7	0.13 2.25	37	43	3.3	0.23 3.78	42	48					
	2.5 250	2.8	0.15 2.47	38	44	3.5	0.25 4.16	41	47					
240°	1.0 100	1.7	0.12 1.99	62	72	2.1	0.20 3.35	68	79					
	1.5 150	2.1	0.15 2.49	51	59	2.4	0.25 4.19	66	76					
	2.0 200	2.4	0.17 2.92	46	53	3.0	0.29 4.91	49	57					
	2.1 210	2.7	0.18 2.99	37	43	3.3	0.30 5.04	42	48					
	2.5 250	2.8	0.20 3.30	38	44	3.5	0.33 5.55	41	47					
270°	1.0 100	1.7	0.13 2.24	62	72	2.1	0.23 3.77	68	79					
	1.5 150	2.1	0.17 2.80	51	59	2.4	0.28 4.72	66	76					
	2.0 200	2.4	0.20 3.28	46	53	3.0	0.33 5.52	49	57					
	2.1 210	2.7	0.20 3.37	37	43	3.3	0.34 5.68	42	48					
	2.5 250	2.8	0.22 3.71	38	44	3.5	0.37 6.25	41	47					
360°	1.0 100	1.7	0.18 2.99	62	72	2.1	0.30 5.03	68	79					
	1.5 150	2.1	0.22 3.73	51	59	2.4	0.38 6.29	66	76					
	2.0 200	2.4	0.26 4.37	46	53	3.0	0.44 7.37	49	57					
	2.1 210	2.7	0.27 4.49	37	43	3.3	0.47 7.57	42	48					
	2.5 250	2.8	0.30 4.94	38	44	3.5	0.50 8.33	41	47					



NOZZLES

Pro Adjustable Nozzles Performance Data – Metric

Arc	3.7 m Radius Adjustable from 0° to 360° Trajectory: 28° Color Code: Green					Nozzle 12A		4.6 m Radius Adjustable from 0° to 360° Trajectory: 28° Color Code: Black					Nozzle 15A		5.2 m Radius Adjustable from 0° to 360° Trajectory: 28° Color Code: Gray					Nozzle 17A			
	Pressure	Radius	Flow	Precip	Precip	Radius	Flow	Precip	Precip	Radius	Flow	Precip	Precip	Radius	Flow	Precip	Precip	Radius	Flow	Precip	Precip		
	Bar kPa	m	m ³ /hr l/min	mm/hr	mm/hr	m	m ³ /hr l/min	mm/hr	mm/hr	m	m ³ /hr l/min	mm/hr	mm/hr	m	m ³ /hr l/min	mm/hr	mm/hr	m	m ³ /hr l/min	mm/hr	mm/hr		
45°	1.0 100	2.7	0.05 0.81	53	61	3.4	0.07 1.19	50	57	4.7	0.09 1.54	33	39										
	1.5 150	3.2	0.06 1.01	47	55	3.9	0.09 1.49	47	54	4.9	0.12 1.93	38	44										
	2.0 200	3.7	0.07 1.18	42	48	4.6	0.10 1.75	40	46	5.2	0.14 2.26	40	46										
	2.1 210	4.0	0.07 1.22	36	42	4.9	0.11 1.80	36	41	5.5	0.14 2.32	37	42										
	2.5 250	4.2	0.08 1.34	36	42	5.2	0.12 1.98	35	40	5.7	0.15 2.55	38	43										
90°	1.0 100	2.7	0.10 1.62	53	61	3.4	0.14 2.39	50	57	4.7	0.18 3.08	33	39										
	1.5 150	3.2	0.12 2.02	47	55	3.9	0.18 2.89	47	54	4.9	0.23 3.85	38	44										
	2.0 200	3.7	0.14 2.37	42	48	4.6	0.21 3.50	40	46	5.2	0.27 4.51	40	46										
	2.1 210	4.0	0.15 2.43	36	42	4.9	0.22 3.59	36	41	5.5	0.28 4.63	37	42										
	2.5 250	4.2	0.16 2.68	36	42	5.2	0.24 3.95	35	40	5.7	0.31 5.10	38	43										
120°	1.0 100	2.7	0.13 2.16	53	61	3.4	0.19 3.18	50	57	4.7	0.25 4.11	33	39										
	1.5 150	3.2	0.16 2.70	47	55	3.9	0.24 3.98	47	54	4.9	0.31 5.13	38	44										
	2.0 200	3.7	0.19 3.16	42	48	4.6	0.28 4.66	40	46	5.2	0.36 6.01	40	46										
	2.1 210	4.0	0.19 3.24	36	42	4.9	0.29 4.79	36	41	5.5	0.37 6.18	37	42										
	2.5 250	4.2	0.21 3.57	36	42	5.2	0.32 5.27	35	40	5.7	0.41 6.80	38	43										
180°	1.0 100	2.7	0.19 3.23	53	61	3.4	0.29 4.77	50	57	4.7	0.37 6.16	33	39										
	1.5 150	3.2	0.24 4.04	47	55	3.9	0.36 5.97	47	54	4.9	0.46 7.70	38	44										
	2.0 200	3.7	0.28 4.74	42	48	4.6	0.42 6.99	40	46	5.2	0.54 9.02	40	46										
	2.1 210	4.0	0.29 4.86	36	42	4.9	0.43 7.18	36	41	5.5	0.56 9.27	37	42										
	2.5 250	4.2	0.32 5.35	36	42	5.2	0.47 7.90	35	40	5.7	0.61 10.20	38	43										
240°	1.0 100	2.7	0.26 4.31	53	61	3.4	0.38 6.37	50	57	4.7	0.49 8.21	33	39										
	1.5 150	3.2	0.32 5.39	47	55	3.9	0.48 7.96	47	54	4.9	0.62 10.27	38	44										
	2.0 200	3.7	0.38 6.31	42	48	4.6	0.56 9.32	40	46	5.2	0.72 12.03	40	46										
	2.1 210	4.0	0.39 6.49	36	42	4.9	0.57 9.57	36	41	5.5	0.74 12.35	37	42										
	2.5 250	4.2	0.43 7.14	36	42	5.2	0.63 10.54	35	40	5.7	0.82 13.60	38	43										
270°	1.0 100	2.7	0.29 4.85	53	61	3.4	0.43 7.16	50	57	4.7	0.55 9.24	33	39										
	1.5 150	3.2	0.36 6.06	47	55	3.9	0.54 8.95	47	54	4.9	0.69 11.55	38	44										
	2.0 200	3.7	0.43 7.10	42	48	4.6	0.63 10.49	40	46	5.2	0.81 13.53	40	46										
	2.1 210	4.0	0.44 7.30	36	42	4.9	0.65 10.77	36	41	5.5	0.83 13.90	37	42										
	2.5 250	4.2	0.48 8.03	36	42	5.2	0.71 11.86	35	40	5.7	0.92 15.30	38	43										
360°	1.0 100	2.7	0.39 6.47	53	61	3.4	0.57 9.55	50	57	4.7	0.74 12.32	33	39										
	1.5 150	3.2	0.49 8.09	47	55	3.9	0.72 11.94	47	54	4.9	0.92 15.40	38	44										
	2.0 200	3.7	0.57 9.47	42	48	4.6	0.84 13.98	40	46	5.2	1.08 18.04	40	46										
	2.1 210	4.0	0.58 9.73	36	42	4.9	0.86 14.36	36	41	5.5	1.11 18.53	37	42										
	2.5 250	4.2	0.64 10.71	36	42	5.2	0.95 15.81	35	40	5.7	1.22 20.40	38	43										

Note: The Pro-Spray PRS30's built-in pressure regulator controls output to a maximum of 2.1 bar (210 kPa). Optimum nozzle performance shown in bold.

PRO-SPRAY® FIXED ARC NOZZLES

GIVE YOUR SPRAYS SOME EDGE. WHEN PRECISION IS IMPERATIVE, PRO-SPRAY FIXED NOZZLES HAVE IT COVERED.

FEATURES

- Colour-coded for easy field identification
- Optimum droplet size minimizes misting while maximizing uniformity
- New 1/3, 2/3, and 3/4 arc options for increased flexibility

OPERATING SPECIFICATIONS

Recommended operating pressure: 2.1 bar; 210 kPa

Specify the new Pro-Spray® PRS30 pop-up for accurate pressure regulation of 2.1 bar; 210 kPa



PRO-SPRAY® FIXED ARC NOZZLES CHART

Pro-Spray® Fixed Arc Nozzles Performance Data – Metric																	
Arc	Pattern	Pressure Bar kPa	1.5 m Radius Fixed (1/4, 1/2, Full) Trajectory: 0° Color Code: Blue				2.4 m Radius Fixed (1/4, 1/3, 1/2, Full) Trajectory: 0° Color Code: Brown				3.0 m Radius Fixed (1/4, 1/3, 1/2, Full) Trajectory: 15° Color Code: Red						
			Radius m	Flow m³/hr	Flow l/min	Precip mm/hr	Radius m	Flow m³/hr	Flow l/min	Precip mm/hr	Radius m	Flow m³/hr	Flow l/min	Precip mm/hr			
90°	Q	1.0 100	1.1	0.02	0.30	60	69	1.7	0.04	0.62	51	59	2.4	0.07	1.08	45	52
		1.5 150	1.3	0.02	0.38	54	62	2.1	0.05	0.84	46	53	2.7	0.08	1.33	44	50
		2.0 200	1.5	0.03	0.45	48	55	2.4	0.06	1.00	42	48	3.0	0.09	1.53	41	47
		2.1 210	1.5	0.03	0.46	49	57	2.4	0.06	1.03	43	49	3.0	0.09	1.57	42	48
		2.5 250	1.7	0.03	0.51	42	49	2.7	0.07	1.13	37	43	3.3	0.10	1.71	38	44
120°	T	1.0 100	Use Hunter 4A or 6A Nozzles				1.7	0.05	0.83	51	59	2.4	0.09	1.44	45	52	
		1.5 150	Use Hunter 4A or 6A Nozzles				2.1	0.07	1.12	46	53	2.7	0.11	1.77	44	50	
		2.0 200	Use Hunter 4A or 6A Nozzles				2.4	0.08	1.33	42	48	3.0	0.12	2.04	41	47	
		2.1 210	Use Hunter 4A or 6A Nozzles				2.4	0.08	1.37	43	49	3.0	0.13	2.09	42	48	
		2.5 250	Use Hunter 4A or 6A Nozzles				2.7	0.09	1.51	37	43	3.3	0.14	2.28	38	44	
180°	H	1.0 100	1.1	0.04	0.60	2.25	69	1.7	0.08	1.33	51	64	2.4	0.13	2.17	45	52
		1.5 150	1.3	0.05	0.76	2.54	62	2.1	0.10	1.69	46	53	2.7	0.16	2.65	44	50
		2.0 200	1.5	0.05	0.90	1.80	55	2.4	0.12	1.99	42	48	3.0	0.18	3.06	41	47
		2.1 210	1.5	0.06	0.92	1.36	57	2.4	0.12	2.05	43	49	3.0	0.19	3.14	42	48
		2.5 250	1.7	0.06	1.02	1.46	49	2.7	0.14	2.27	37	43	3.3	0.21	3.43	38	44
240°	TT	1.0 100	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		1.5 150	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		2.0 200	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		2.1 210	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		2.5 250	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
270°	TQ	1.0 100	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		1.5 150	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		2.0 200	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		2.1 210	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
		2.5 250	Use Hunter 4A or 6A Nozzles				Use Hunter 8A Nozzle				Use Hunter 10A Nozzle						
360°	F	1.0 100	1.1	0.07	1.20	60	69	1.7	0.16	2.67	51	64	2.4	0.26	4.33	45	52
		1.5 150	1.3	0.09	1.52	54	62	2.1	0.20	3.37	46	53	2.7	0.32	5.31	44	50
		2.0 200	1.5	0.11	1.79	48	55	2.4	0.24	3.99	42	48	3.0	0.37	6.13	41	47
		2.1 210	1.5	0.11	1.79	49	57	2.4	0.25	4.10	43	49	3.0	0.38	6.28	42	48
		2.5 250	1.7	0.12	0.12	42	49	2.7	0.27	4.54	37	43	3.3	0.41	6.85	38	44

Pro-Spray® Fixed Arc Nozzles Performance Data – Metric																	
Arc	Pattern	Pressure Bar kPa	3.7 m Radius Fixed (1/4, 1/3, 1/2, 2/3, 3/4, Full) Trajectory: 28° Color Code: Green				4.6 m Radius Fixed (1/4, 1/3, 1/2, 2/3, 3/4, Full) Trajectory: 28° Color Code: Black				5.2 m Radius Fixed (1/4, 1/2) Trajectory: 28° Color Code: Gray						
			Radius m	Flow m³/hr	Flow l/min	Precip mm/hr	Radius m	Flow m³/hr	Flow l/min	Precip mm/hr	Radius m	Flow m³/hr	Flow l/min	Precip mm/hr			
90°	Q	1.0 100	3.0	0.10	1.58	42	49	3.9	0.15	2.50	39	46	4.7	0.19	3.17	34	40
		1.5 150	3.4	0.12	2.00	42	48	4.2	0.18	3.06	42	48	4.9	0.23	3.88	39	45
		2.0 200	3.7	0.14	2.37	41	48	4.6	0.21	3.54	40	46	5.2	0.27	4.48	40	46
		2.1 210	3.7	0.15	2.43	43	49	4.6	0.22	3.62	41	47	5.2	0.28	4.59	41	47
		2.5 250	4.0	0.16	2.69	40	47	4.9	0.24	3.95	40	46	5.5	0.30	5.01	40	46
120°	T	1.0 100	3.0	0.13	2.11	42	49	3.9	0.20	3.33	39	46	Use Hunter 17A Nozzle				
		1.5 150	3.4	0.16	2.67	42	48	4.2	0.24	4.08	42	48	Use Hunter 17A Nozzle				
		2.0 200	3.7	0.19	3.16	41	48	4.6	0.28	4.71	40	46	Use Hunter 17A Nozzle				
		2.1 210	3.7	0.19	3.25	43	49	4.6	0.29	4.83	41	47	Use Hunter 17A Nozzle				
		2.5 250	4.0	0.22	3.59	40	47	4.9	0.32	5.27	40	46	Use Hunter 17A Nozzle				
180°	H	1.0 100	3.0	0.19	3.17	42	49	3.9	0.30	5.00	39	46	4.7	0.38	6.33	34	40
		1.5 150	3.4	0.24	4.01	42	48	4.2	0.37	6.12	42	48	4.9	0.47	7.76	39	45
		2.0 200	3.7	0.28	4.73	41	48	4.6	0.42	7.07	40	46	5.2	0.54	8.96	40	46
		2.1 210	3.7	0.29	4.87	43	49	4.6	0.43	7.25	41	47	5.2	0.55	9.18	41	47
		2.5 250	4.0	0.32	5.39	40	47	4.9	0.47	7.91	40	46	5.5	0.60	10.01	40	46
240°	TT	1.0 100	3.0	0.25	4.22	42	49	3.9	0.40	6.67	39	46	Use Hunter 17A Nozzle				
		1.5 150	3.4	0.32	5.34	42	48	4.2	0.49	8.16	42	48	Use Hunter 17A Nozzle				
		2.0 200	3.7	0.38	6.31	41	48	4.6	0.57	9.43	40	46	Use Hunter 17A Nozzle				
		2.1 210	3.7	0.39	6.49	43	49	4.6	0.58	9.66	41	47	Use Hunter 17A Nozzle				
		2.5 250	4.0	0.43	7.18	40	47	4.9	0.63	10.54	40	46	Use Hunter 17A Nozzle				
270°	TQ	1.0 100	3.0	0.29	4.75	42	49	3.9	0.45	7.50	39	46	Use Hunter 17A Nozzle				
		1.5 150	3.4	0.36	6.01	42	48	4.2	0.55	9.19	42	48	Use Hunter 17A Nozzle				
		2.0 200	3.7	0.43	7.10	41	48	4.6	0.64	10.61	40	46	Use Hunter 17A Nozzle				
		2.1 210	3.7	0.44	7.30	43	49	4.6	0.65	10.87	41	47	Use Hunter 17A Nozzle				
		2.5 250	4.0	0.48	8.08	40	47	4.9	0.71	11.86	40	46	Use Hunter 17A Nozzle				
360°	F	1.0 100	3.0	0.38	6.33	42	49	3.9	0.60	10.00	39	46	Use Hunter 17A Nozzle				
		1.5 150	3.4	0.48	8.01	42	48	4.2	0.73	12.25	42	48	Use Hunter 17A Nozzle				
		2.0 200	3.7	0.57	9.47	41	48	4.6	0.85	14.14	40	46	Use Hunter 17A Nozzle				
		2.1 210	3.7	0.58	9.74	43	49	4.6	0.87	14.49	41	47	Use Hunter 17A Nozzle				
		2.5 250	4.0	0.65	10.78	40	47	4.9	0.95	15.81	40	46	Use Hunter 17A Nozzle				

Note: Optimum nozzle performance shown in bold.

NOZZLES

STREAM NOZZLES

These adjustable arc models handle stream sprays with ease. They offer sprays that at 2.1 bar (210 kPa) can water as far as 2.4 m or 4.8 m, making them a great choice for slopes, ground cover and shrubbery applications.

STREAM SPRAY NOZZLES



Model S-8A Stream Spray Nozzle Performance Data – Metric

Adjustable: 25° to 360° Color Code: Blue

Arc	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
90°	1.0	100	2.1	0.06	0.9	2.28	2.63
	1.5	150	2.4	0.07	1.2	1.93	2.22
	2.0	200	2.4	0.08	1.3	2.11	2.43
	2.1	210	2.4	0.08	1.4	2.29	2.64
	2.5	250	2.7	0.09	1.5	1.95	2.25
180°	1.0	100	2.1	0.11	1.9	2.12	2.45
	1.5	150	2.4	0.14	2.3	1.71	1.98
	2.0	200	2.4	0.16	2.7	1.80	2.08
	2.1	210	2.4	0.16	2.7	1.89	2.19
	2.5	250	2.7	0.18	3.0	1.57	1.81
360°	1.0	100	2.1	0.23	3.8	2.12	2.45
	1.5	150	2.4	0.28	4.6	1.67	1.93
	2.0	200	2.4	0.32	5.3	1.73	2.00
	2.1	210	2.4	0.33	5.5	1.77	2.05
	2.5	250	2.7	0.36	6.0	1.45	1.67

Model S-16A Stream Spray Nozzle Performance Data – Metric

Adjustable: 25° to 360° Color Code: Blue

Arc	Pressure		Radius m	Flow		Precip mm/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
90°	1.0	100	4.6	0.09	1.3	0.68	0.79
	1.5	150	4.9	0.10	1.6	0.69	0.80
	2.0	200	4.9	0.11	1.8	0.75	0.87
	2.1	210	5.2	0.11	1.9	0.72	0.83
	2.5	250	5.5	0.12	2.1	0.68	0.78
180°	1.0	100	4.6	0.16	2.6	0.57	0.66
	1.5	150	4.9	0.19	3.2	0.60	0.69
	2.0	200	4.9	0.22	3.7	0.66	0.76
	2.1	210	5.2	0.23	3.8	0.65	0.75
	2.5	250	5.5	0.25	4.1	0.62	0.71
360°	1.0	100	4.6	0.31	5.2	0.51	0.59
	1.5	150	4.9	0.38	6.4	0.55	0.63
	2.0	200	4.9	0.44	7.3	0.62	0.72
	2.1	210	5.2	0.45	7.5	0.61	0.70
	2.5	250	5.5	0.49	8.2	0.59	0.68

STRIP PATTERN NOZZLES

Dealing with narrow planting areas? Narrow site constraints are no big deal when you have great nozzle options. Choose from centre and end strips or corner and side strips. Either way, you'll enjoy optimum distribution from nozzles designed to exacting standards.

Left Corner Strip
1.5 m x 4.5 m
(5' x 15')



Side Strip
1.5 m x 9.0 m
(5' x 30')



Right Corner Strip
1.5 m x 4.5 m
(5' x 15')



Center Strip
1.5 m x 9.0 m
(5' x 30')



End Strip
1.5 m x 4.5 m
(5' x 15')



Side Strip
2.7 m x 5.5 m
(9' x 18')



Strip Pattern Nozzle Performance Data – Metric

Color Code: Blue

Nozzle Model	Pressure		Width x Length	Flow	
	Bar	kPa		m ³ /hr	l/min
LCS-515 Left-Corner Strip	1.0	100	1.2 m x 4.2 m	0.10	1.7
	1.5	150	1.2 m x 4.3 m	0.13	2.1
	2.0	200	1.5 m x 4.5 m	0.15	2.4
	2.1	210	1.5 m x 4.5 m	0.15	2.5
RCS-515 Right-Corner Strip	1.0	100	1.2 m x 4.2 m	0.10	1.7
	1.5	150	1.2 m x 4.3 m	0.13	2.1
	2.0	200	1.5 m x 4.5 m	0.15	2.4
	2.1	210	1.5 m x 4.5 m	0.15	2.5
SS-530 Side Strip	1.0	100	2.2 m x 8.5 m	0.21	3.5
	1.5	150	2.4 m x 8.5 m	0.25	4.2
	2.0	200	1.5 m x 9.0 m	0.29	4.9
	2.1	210	1.5 m x 9.0 m	0.30	5.0
ES-515 End Strip	1.0	100	1.1 m x 4.2 m	0.10	1.7
	1.5	150	1.2 m x 4.3 m	0.13	2.1
	2.0	200	1.5 m x 4.5 m	0.15	2.4
	2.1	210	1.5 m x 4.5 m	0.15	2.5
CS-530 Center Strip	1.0	100	2.2 m x 8.5 m	0.21	3.5
	1.5	150	2.4 m x 8.5 m	0.25	4.2
	2.0	200	1.5 m x 9.0 m	0.29	4.9
	2.1	210	1.5 m x 9.0 m	0.30	5.0
SS-918 Side Strip	1.0	100	2.4 m x 5.2 m	0.27	4.5
	1.5	150	2.7 m x 5.5 m	0.33	5.5
	2.0	200	2.7 m x 5.5 m	0.38	6.4
	2.1	210	2.7 m x 5.5 m	0.39	6.5
	2.5	250	2.7 m x 5.5 m	0.43	7.1

NOZZLES/BUBBLERS

SHORT RADIUS NOZZLES

Small space solution in short order. When you need controlled irrigation for smaller spaces, these nozzles have small spaces covered. Available in 0.6 m, 1.2 m, and 1.8 m radius versions.



Short Radius Nozzles Performance Data – Metric

Arc	Pressure Bar kPa	Color Code: Light Brown					Color Code: Light Green					Color Code: Light Blue							
		Nozzle	Radius m	Flow m ³ /hr l/min	Precip mm/hr		Nozzle	Radius m	Flow m ³ /hr l/min	Precip mm/hr		Nozzle	Radius m	Flow m ³ /hr l/min	Precip mm/hr				
90°	1.0 100	2Q	0.6	0.01	0.23	153	177	4Q	1.2	0.04	0.69	115	133	6Q	1.8	0.11	1.84	136	157
	1.5 150		0.6	0.02	0.28	188	217		1.2	0.05	0.77	128	147		1.8	0.11	1.93	143	165
	2.0 200		0.6	0.02	0.33	217	250		1.2	0.05	0.82	137	158		1.8	0.12	2.00	148	171
	2.1 210		0.6	0.02	0.33	222	257		1.2	0.05	0.84	139	160		1.8	0.12	2.01	149	172
	2.5 250		0.6	0.02	0.36	242	280		1.2	0.05	0.87	145	168		1.8	0.12	2.06	152	176
180°	1.0 100	2H	0.6	0.03	0.46	153	177	4H	1.2	0.08	1.39	115	133	6H	1.8	0.22	3.67	136	157
	1.5 150		0.6	0.03	0.56	188	217		1.2	0.09	1.54	128	147		1.8	0.22	3.86	143	165
	2.0 200		0.6	0.04	0.65	217	250		1.2	0.10	1.65	137	158		1.8	0.22	4.00	148	171
	2.1 210		0.6	0.04	0.67	222	257		1.2	0.10	1.67	139	160		1.8	0.22	4.03	149	172
	2.5 250		0.6	0.04	0.73	242	280		1.2	0.10	1.74	145	168		1.8	0.23	4.12	152	176

PRESSURE-COMPENSATING BUBBLERS AND BUBBLER NOZZLES

Hunter bubblers keep the output of water constant regardless of pressure, for precise, easy application. Every plant, shrub, and tree receives the right amount of water with no excess runoff or waste.

MULTI-STREAM BUBBLER NOZZLES – MSBN

Q - 0.95 l/min Q / H - 1.89 l/min H / F - 3.78 l/min F - 7.57 l/min



PCN BUBBLER NOZZLES

0.95 l/min 1.89 l/min 3.78 l/min 7.57 l/min



PCB AND AFB BUBBLERS 1.2 CM (1/2" INLET)



DUAL-STREAM BUBBLER NOZZLES

5-CST-B



Multi-Stream Bubbler Performance Data – Metric

Arc	Model	Flow		Radius m
		m ³ /hr	l/min	
☐	MSBN-25Q	0.06	0.9	0.30
	MSBN-50Q	0.11	1.9	0.46
☐	MSBN-50H	0.11	1.9	0.30
	MSBN-10H	0.23	3.8	0.46
☐	MSBN-10F	0.23	3.8	0.30
	MSBN-20F	0.45	7.6	0.46

Note: Typical spacing 0.6 to 1.2 m. Flows shown for pressures between 1 and 4.8 bar.

PCB / PCN & AFB Performance Data – Metric

Model	Flow		Pattern Type
	m ³ /hr	l/min	
25	0.06	0.9	Trickle
50	0.11	1.9	Trickle
10	0.23	3.8	Umbrella
20	0.45	7.6	Umbrella

Note: Typical spacing 0.3 to 0.9 m. Flows shown for pressures between 1 and 4.8 bar.

5-CST-B Bubbler Nozzle Performance Data – Metric

Pressure Bar kPa	Radius m	Flow	
		m ³ /hr	l/min
1.0 100	1.5	0.07	1.1
1.5 150	1.5	0.07	1.2
2.0 200	1.5	0.09	1.4
2.1 210	1.5	0.09	1.5
2.5 250	1.5	0.10	1.6



MP ROTATOR

MP ROTATORS

A REVELATION IN CONSERVATION.

Intelligent water use is no longer optional. Today, it is everyone's responsibility. Setting a new precedent in efficiency, Hunter's MP Rotator has started the revolution to change an industry, one spray, one installation, and one retrofit at a time.



MP ROTATOR®

ECO ROTATOR

APPLICATION
Residential/Light Commercial

MODEL
10 cm

ECO ROTATOR MINIMIZES WATER USE AND INSTALLATION TIME AND MAXIMIZES FLEXIBILITY AND PERFORMANCE.

FEATURES

- Application: Residential/light commercial
- Model (plastic riser): 10 cm
- Nozzle choices: 3
- Flow rate: 0.61 to 9.37 l/min
- Nozzle choices: MP100090, MP200090, or MP300090
- Drain check valve (up to 2 m of elevation)
- Adjustable arc and radius offer timely and precise settings
- Two-piece ratchet
- Zero flow-by wiper seal
- Patented double pop
- Warranty period: 2 years

ADVANCED FEATURE

- Large filter screen

OPERATING SPECIFICATIONS

Flow rate: 0.61 to 9.37 l/min
 Radius: 2.5 to 9.1 m
 Recommended pressure range:
 1.75 to 3.75 bar; 175 to 375 kPa
 Precipitation rates: 10 mm/hr approx.

FACTORY INSTALLED OPTION

MP1000 or MP2000 or MP3000 (90 to 210)

USER INSTALLED OPTION

Drain check valve: 10 cm model
 (up to 2 m of elevation; P/N 462237)



ECO-04: Overall height: 19 cm
 Exposed diameter: 3 cm
 Inlet size: ½" female



SPECIFICATIONBUILDER

www.hunterindustries.com/ECO

BODY	MODELS
ECO-04 = 10 cm (4") pop-up	1090 = MP1000 2.5 to 4.5 m radius, adjustable from 90° to 210° 2090 = MP2000 4 to 6.4 m radius, adjustable from 90° to 210° 3090 = MP3000 6.7 to 9.1 m radius, adjustable from 90° to 210°

EXAMPLE

ECO-04 - 2090 10 cm (4") pop-up, with 4 to 6.4 m radius nozzle, adjustable from 90° to 210°

ECO ROTATOR CHART

Eco Rotator Performance Data – Metric

		ECO-04-1090 Radius: 2.5 to 4.6 m Adjustable Arc Color Code: Maroon						ECO-04-2090 Radius: 4 to 6.4 m Adjustable Arc Color Code: Black						ECO-04-3090 Radius: 6.7 to 9.1 m Adjustable Arc Color Code: Blue					
Arc	Pressure Bar kPa	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr ■ ▲		Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr ■ ▲		Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr ■ ▲	
90°	1.75	175	---	---	---	---	---	Maroon = 90° to 210°	5.2	71	1.18	11	12	Blue = 90° to 210°	7.6	158	2.63	11	13
	2.00	200	3.7	36	0.61	11	12		5.5	74	1.23	10	11		8.2	166	2.77	10	11
	2.25	225	3.8	38	0.63	10	12		5.6	80	1.33	10	12		8.4	175	2.92	10	12
	2.50	250	4.0	41	0.68	10	12		5.8	86	1.43	10	12		8.5	185	3.08	10	12
	2.75	275	4.1	42	0.70	10	11		6.1	91	1.52	10	11		9.1	195	3.25	9	11
	3.00	300	4.3	44	0.73	10	11		6.4	94	1.57	9	11		9.1	203	3.38	10	11
	3.25	325	4.3	45	0.75	10	11		6.6	97	1.62	9	10		9.1	212	3.53	10	12
	3.50	350	4.4	47	0.78	10	11		6.7	101	1.68	9	10		9.1	220	3.67	11	12
3.75	375	4.6	49	0.81	9	11	6.7	106	1.77	9	11	9.1	228	3.80	11	13			
180°	1.75	175	---	---	---	---	---	Black = 90° to 210°	4.9	133	2.22	11	12	Blue = 90° to 210°	7.6	329	5.48	11	13
	2.00	200	3.7	72	1.20	11	12		5.2	141	2.35	11	13		8.2	353	5.88	10	12
	2.25	225	3.8	76	1.27	10	12		5.3	150	2.50	11	13		8.4	373	6.22	11	12
	2.50	250	4.0	81	1.35	10	12		5.5	160	2.67	11	12		8.5	393	6.55	11	12
	2.75	275	4.1	84	1.40	10	11		5.8	168	2.80	10	12		9.1	413	6.88	10	11
	3.00	300	4.3	88	1.46	10	11		6.1	174	2.90	10	11		9.1	431	7.18	10	12
	3.25	325	4.3	91	1.51	10	11		6.2	182	3.03	9	11		9.1	449	7.48	11	12
	3.50	350	4.4	94	1.56	10	11		6.4	189	3.15	9	10		9.1	466	7.77	11	13
3.75	375	4.6	97	1.62	9	11	6.4	193	3.22	9	11	9.1	481	8.02	12	13			
210°	1.75	175	---	---	---	---	---	Black = 90° to 210°	4.9	155	2.58	11	12	Blue = 90° to 210°	7.6	384	6.40	11	13
	2.00	200	3.7	85	1.41	11	13		5.2	165	2.75	11	13		8.2	411	6.85	10	12
	2.25	225	3.8	89	1.48	10	12		5.3	175	2.92	11	13		8.4	436	7.27	11	12
	2.50	250	4.0	95	1.58	10	12		5.5	185	3.08	10	12		8.5	459	7.65	11	12
	2.75	275	4.1	98	1.63	10	11		5.8	195	3.25	10	12		9.1	481	8.02	10	11
	3.00	300	4.3	102	1.71	10	11		6.1	205	3.42	10	11		9.1	502	8.37	10	12
	3.25	325	4.3	106	1.76	10	11		6.2	214	3.57	9	11		9.1	523	8.72	11	12
	3.50	350	4.4	109	1.82	10	11		6.4	222	3.70	9	10		9.1	542	9.03	11	13
3.75	375	4.6	113	1.89	9	11	6.4	228	3.80	10	11	9.1	562	9.37	12	13			

MP ROTATOR

APPLICATION
Residential/Commercial

RADIUS
2.5 m to 9.1 m

www.hunterindustries.com/MP

MP ROTATORS SAVE MORE WITH 30% INCREASED EFFICIENCY OVER SPRAYS.

FEATURES

- True matched precipitation any arc or radius setting
- Radius can be reduced up to 25% on all models
- Colour-coded for easy identification
- Double-pop feature keeps dirt and debris out of nozzle
- Removable filter screen prevents large objects from clogging nozzle
- Low precipitation rate
- Wind-resistant multi-stream technology
- Adjustable arc and radius offer timely and precise settings

ADVANCED FEATURES

- Ratchet mechanism prevents damage when attempting to reduce radius too far
- Models can only be adjusted while water is running

OPERATING SPECIFICATIONS

Recommended operating pressure: 2.8 bar; 280 kPa

Models can only be adjusted while water is running

OPTIONS

Pair with Pro-Spray PRS40 to achieve pressure regulation at the head of 2.8 bar; 280 kPa

Adding "HT" will specify male threaded nozzles



MP1000 2.5 to 4.5 m radius



MP100090 90° to 210°
MP1000210 210° to 270°
MP1000360 360°

MP2000 4 to 6.4 m radius



MP200090 90° to 210°
MP2000210 210° to 270°
MP2000360 360°

MP3000 6.7 to 9.1 m radius



MP300090 90° to 210°
MP3000210 210° to 270°
MP3000360 360°

MP STRIPS



MPLCS515 Left Corner
1.5 x 4.6 m
MPRCS515 Right Corner
1.5 x 4.6 m



MPSS530 Side Strip
1.5 x 9.1 m
MPCORNER * Corner
2.4 to 4.5 m radius

* Applies additional water first 1 m from the pop-up when head to head coverage is not available

SPECIFICATIONBUILDER

MODELS	OPTIONS
MP1000-90 = 2.5 to 4.5 m radius, adjustable from 90° to 210° MP1000-210 = 2.5 to 4.5 m radius, adjustable from 210° to 270° MP1000-360 = 2.5 to 4.5 m radius, 360°	(blank) = No option HT = Male thread version
MP2000-90 = 4 to 6.4 m radius, adjustable from 90° to 210° MP2000-210 = 4 to 6.4 m radius, adjustable from 210° to 270° MP2000-360 = 4 to 6.4 m radius, 360°	
MP3000-90 = 6.7 to 9.1 m radius, adjustable from 90° to 210° MP3000-210 = 6.7 to 9.1 m radius, adjustable from 210° to 270° MP3000-360 = 6.7 to 9.1 m radius, 360°	
MPLCS515 = Left corner strip 1.5 to 4.6 m	
MPRCS515 = Right corner strip 1.5 to 4.6 m	
MPSS530 = Side strip 1.5 to 9.1 m	
MPCORNER = 2.5 to 4.5 m radius, adjustable from 45° to 105°	

EXAMPLE

MP1000-210 2.5 to 4.5 m radius, adjustable from 210° to 270°

(MP Rotators are designed to operate in conjunction with a pop-up sprinkler or shrub adapter.)

MP ROTATORS

MP ROTATOR CHARTS

MP Rotator Performance Data – Metric

		MP1000 Radius: 2.5 to 4.5 m Adjustable Arc and Full Circle Color Code: Maroon, Lt. Blue, or Olive						MP2000 Radius: 4 to 6.4 m Adjustable Arc and Full Circle Color Code: Black, Green, or Red						MP3000 Radius: 6.7 to 9.1 m Adjustable Arc and Full Circle Color Code: Blue, Yellow, or Gray					
Arc	Pressure Bars kPa	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr ▲	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr ▲	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr ▲			
90°	1.75 175	Maroon = 90° to 210°	---	---	---	---	Black = 90° to 210°	5.2	71	1.18	11	Blue = 90° to 210°	7.6	158	2.63	11	13		
	2.00 200		3.7	36	0.61	11		12	5.5	74	1.23		10	11	8.2	166	2.77	10	11
	2.25 225		3.8	38	0.63	10		12	5.6	80	1.33		10	12	8.4	175	2.92	10	12
	2.50 250		4.0	41	0.68	10		12	5.8	86	1.43		10	12	8.5	185	3.08	10	12
	2.75 275		4.1	42	0.70	10		11	6.1	91	1.52		10	11	9.1	195	3.25	9	11
	3.00 300		4.3	44	0.73	10		11	6.4	94	1.57		9	11	9.1	203	3.38	10	11
	3.25 325		4.3	45	0.75	10		11	6.6	97	1.62		9	10	9.1	212	3.53	10	12
3.50 350	4.4	47	0.78	10	11	6.7	101	1.68	9	10	9.1	220	3.67	11	12				
3.75 375	4.6	49	0.81	9	11	6.7	106	1.77	9	11	9.1	228	3.80	11	13				
180°	1.75 175	Maroon = 90° to 210°	---	---	---	---	Black = 90° to 210°	4.9	133	2.22	11	12	Blue = 90° to 210°	7.6	329	5.48	11	13	
	2.00 200		3.7	72	1.20	11		12	5.2	141	2.35	11		13	8.2	353	5.88	10	12
	2.25 225		3.8	76	1.27	10		12	5.3	150	2.50	11		13	8.4	373	6.22	11	12
	2.50 250		4.0	81	1.35	10		12	5.5	160	2.67	11		12	8.5	393	6.55	11	12
	2.75 275		4.1	84	1.40	10		11	5.8	168	2.80	10		12	9.1	413	6.88	10	11
	3.00 300		4.3	88	1.46	10		11	6.1	174	2.90	10		11	9.1	431	7.18	10	12
	3.25 325		4.3	91	1.51	10		11	6.2	182	3.03	9		11	9.1	449	7.48	11	12
3.50 350	4.4	94	1.56	10	11	6.4	189	3.15	9	10	9.1	466	7.77	11	13				
3.75 375	4.6	97	1.62	9	11	6.4	193	3.22	9	11	9.1	481	8.02	12	13				
210°	1.75 175	Lt. Blue = 210° to 270°	---	---	---	---	Green = 210° to 270°	4.9	155	2.58	11	12	Yellow = 210° to 270°	7.6	384	6.40	11	13	
	2.00 200		3.7	85	1.41	11		13	5.2	165	2.75	11		13	8.2	411	6.85	10	12
	2.25 225		3.8	89	1.48	10		12	5.3	175	2.92	11		13	8.4	436	7.27	11	12
	2.50 250		4.0	95	1.58	10		12	5.5	185	3.08	10		12	8.5	459	7.65	11	12
	2.75 275		4.1	98	1.63	10		11	5.8	195	3.25	10		12	9.1	481	8.02	10	11
	3.00 300		4.3	102	1.71	10		11	6.1	205	3.42	10		11	9.1	502	8.37	10	12
	3.25 325		4.3	106	1.76	10		11	6.2	214	3.57	9		11	9.1	523	8.72	11	12
3.50 350	4.4	109	1.82	10	11	6.4	222	3.70	9	10	9.1	542	9.03	11	13				
3.75 375	4.6	113	1.89	9	11	6.4	228	3.80	10	11	9.1	562	9.37	12	13				
270°	1.75 175	Lt. Blue = 210° to 270°	---	---	---	---	Green = 210° to 270°	4.9	199	3.32	11	12	Yellow = 210° to 270°	7.6	501	8.35	12	13	
	2.00 200		3.7	108	1.80	11		13	5.2	212	3.53	11		13	8.2	530	8.83	10	12
	2.25 225		3.8	114	1.90	10		12	5.3	225	3.75	11		13	8.4	560	9.33	11	12
	2.50 250		4.0	123	2.05	10		12	5.5	238	3.97	10		12	8.5	589	9.82	11	12
	2.75 275		4.1	126	2.10	10		11	5.8	249	4.15	10		12	9.1	619	10.32	10	11
	3.00 300		4.3	132	2.20	10		11	6.1	261	4.35	10		11	9.1	646	10.77	10	12
	3.25 325		4.3	135	2.25	10		11	6.2	272	4.53	9		11	9.1	673	11.22	11	12
3.50 350	4.4	141	2.35	10	11	6.4	282	4.70	9	10	9.1	701	11.68	11	13				
3.75 375	4.6	147	2.45	9	11	6.4	293	4.88	9	11	9.1	727	12.12	12	13				
360°	1.75 175	Olive = 360°	---	---	---	---	Red = 360°	4.9	265	4.42	11	12	Gray = 360°	7.6	659	10.98	11	13	
	2.00 200		3.5	144	2.40	12		14	5.2	283	4.72	11		13	8.2	703	11.72	10	12
	2.25 225		3.8	153	2.55	11		13	5.3	300	5.00	11		13	8.4	745	12.42	11	12
	2.50 250		4.0	161	2.69	10		12	5.5	317	5.28	10		12	8.5	786	13.10	11	12
	2.75 275		4.1	169	2.81	10		12	5.8	333	5.55	10		12	9.1	825	13.75	10	11
	3.00 300		4.3	177	2.94	10		11	6.1	348	5.80	10		11	9.1	862	14.37	10	12
	3.25 325		4.3	183	3.05	10		11	6.2	362	6.03	9		11	9.1	897	14.95	11	12
3.50 350	4.4	190	3.17	10	11	6.4	375	6.25	9	10	9.1	931	15.52	11	13				
3.75 375	4.5	195	3.25	10	11	6.4	384	6.40	9	10	9.1	964	16.07	12	13				



WORKS BEST WITH PRS40
See page 38.

MP ROTATORS

MP Rotator Performance Data – Metric

		MP Corner Radius: 2.4 to 4.5 m Adjustable Arc Color Code: Turquoise			
Arc	Pressure Bars kPa	Color	Radius m	Flow LPH	Flow LPM
45°	1.75 175	Turquoise = 45° to 105°	---	---	---
	2.00 200		3.5	36	0.61
	2.25 225		3.8	38	0.63
	2.50 250		4.0	41	0.68
	2.75 275		4.1	42	0.70
	3.00 300		4.3	44	0.73
	3.25 325		4.3	45	0.75
3.50 350	4.4	47	0.78		
3.75 375	4.5	49	0.81		
90°	1.75 175	Turquoise = 45° to 105°	3.2	69	1.15
	2.00 200		3.5	76	1.27
	2.25 225		3.8	79	1.31
	2.50 250		4.0	84	1.40
	2.75 275		4.1	86	1.44
	3.00 300		4.3	94	1.57
	3.25 325		4.3	98	1.63
3.50 350	4.4	100	1.67		
3.75 375	4.5	104	1.73		
105°	1.75 175	Turquoise = 45° to 105°	3.2	80	1.34
	2.00 200		3.5	89	1.48
	2.25 225		3.8	92	1.53
	2.50 250		4.0	98	1.63
	2.75 275		4.1	102	1.70
	3.00 300		4.3	110	1.83
	3.25 325		4.3	113	1.88
3.50 350	4.4	117	1.94		
3.75 375	4.5	120	2.00		

MP Rotator Performance Data – Metric

		MPLCS515 MPRCS515 MPSS530				
Nozzle Model	Pressure Bars kPa	Color	Width x Length	Flow LPM	Flow LPH	
MP Left Strip	2.1 210	Ivory	1.2 m x 4.3 m	0.72	43.2	
	2.4 240		1.5 m x 4.6 m	0.80	48.0	
	2.8 280		1.5 m x 4.6 m	0.83	49.8	
	3.1 310		1.5 m x 4.6 m	0.87	52.2	
	3.4 340		1.8 m x 4.9 m	0.95	57.0	
3.8 380	1.8 m x 4.9 m	0.98	58.8			
MP Right Strip	2.1 210	Copper	1.2 m x 4.3 m	0.72	43.2	
	2.4 240		1.5 m x 4.6 m	0.80	48.0	
	2.8 280		1.5 m x 4.6 m	0.83	49.8	
	3.1 310		1.5 m x 4.6 m	0.87	52.2	
	3.4 340		1.8 m x 4.9 m	0.95	57.0	
3.8 380	1.8 m x 4.9 m	0.98	58.8			
MP Side Strip	2.1 210	Brown	1.2 m x 8.5 m	1.44	86.4	
	2.4 240		1.5 m x 9.1 m	1.55	93.0	
	2.8 280		1.5 m x 9.1 m	1.66	99.6	
	3.1 310		1.5 m x 9.1 m	1.78	106.8	
	3.4 340		1.8 m x 9.8 m	1.85	111.0	
3.8 380	1.8 m x 9.8 m	1.93	115.8			

Note: Strip pattern radius can be adjusted by 25%. MP Rotator is designed to maintain matched precipitation after radius adjustment.



MP STICK

The MP Stick snaps on to 1" PVC of any length to easily adjust MP Rotators while standing up.



MP TOOL

Adjustments to MP Rotators are simply a snap with this handy tool.

A close-up, high-angle photograph of a Hunter irrigation valve. The valve is dark grey or black with a prominent red handle at the top. The handle has a white arrow pointing clockwise. The valve body is complex, with several ports and a central opening. The word "Hunter" is embossed on the lower left side of the valve. The background is a dark, textured surface.

THE NEXT LEVEL OF CONTROL. Where others can claim only reliability, Hunter valves use that as a starting point. Dependability is a given when innovation is the standard. Fully loaded with features to take on any size project, from a residential micro irrigation zone to a large turf rotor zone, these valves do more than deliver. They raise the bar.

VALVES

COMPARISON CHART

	SRV	PGV Jar-Top	PGV	ICV	ICV Filter Sentry™	IBV	IBV Filter Sentry™	Drip Control Zone Kit*
APPLICATIONS								
Potable water	•	•	•	•	•	•	•	•
Reclaimed water				•	•	•	•	•
Secondary water					•		•	•
Pressure regulation	•	•	•	•	•	•	•	•
Flow control	•	•	•	•	•	•	•	•
Angle option			•	•				
High pressure systems				•	•	•	•	
Low pressure system	•	•	•	•	•	•	•	•
Residential	•	•	•					•
Commercial			•	•	•	•	•	•

*See page 96

ADVANCED FEATURES

FLOW CONTROL

Maximize efficiency and prolong the life of a system by fine tuning flow and pressure for each zone.

SRV, PGV, PGV-JT, PGV-ASV, ICV, IBV



RECLAIMED WATER ID HANDLE

Violet tags and handles are an option for a clear, quick, and simple method of identifying the use of non-potable water.

SRV, PGV, PGV-JT, PGV-ASV, ICV, IBV (tag)



FILTER SENTRY™

The Filter Sentry scours the filter clean with a wiper that slides up and covers the entire screen when the valve opens. Even more, the wiper continues to scrub the filter's upper part during valve operation. The Filter Sentry can be added after the valve is installed as well.

ICV, IBV



ACCU-SYNC™ CAPABLE

Avoid sprinkler over-pressure conditions and experience significant water savings with Hunter's new Accu-Sync pressure regulator.

SRV, PGV, PGV-JT, PGV-ASV, ICV, IBV



ACCU-SYNC™

ACCU-SYNC BRINGS FIXED OR ADJUSTABLE PRESSURE REGULATION SIMPLY TO ANY ZONE

Accu-Sync is a simple pressure regulator designed for all of Hunter's control valves. The adjustable model enables the zone pressure to be set anywhere between 1.5 and 7 bar; (150 to 700 kPa) while fixed models remove the guesswork and can be installed throughout any system easily. No matter which model you choose, all zones stay in tune with Accu-Sync.

OPERATING SPECIFICATIONS

Regulation from 1.5 to 7 bar; 150 to 700 kPa (20 to 100 PSI)

Static pressure: 10 bar; 1000 kPa (150 PSI)

Required dynamic pressure differential: 1 bar; 100 kPa (15 PSI)

Works with AC and DC latching solenoids

Works with any Hunter valve

Accu-Sync Valve Recommended Flow Ranges

Valve	Flow l/min	Flow m ³ /hr
SRV-100/101	19 to 114	1.2 to 6.8
PGV-100/101	19 to 114	1.2 to 6.8
PGV-151	75 to 454	4.5 to 28
PGV-201	150 to 750	9.0 to 34
ICV-101	19 to 150	1.2 to 9.0
ICV-151	75 to 565	4.5 to 34
ICV-201	150 to 750	9.0 to 46
ICV-301	565 to 1135	34 to 68
IBV-101	19 to 150	1.2 to 9.0
IBV-151	75 to 565	4.5 to 34
IBV-201	150 to 750	9.0 to 46
IBV-301	565 to 1135	34 to 68

The Accu-Sync shown installed on the ICV valve.



ADJUSTABLE

AS-ADJ:
Height with solenoid: 8.2 cm
Length: 26.5 cm



FIXED



AS-20:
Height with solenoid: 8.2 cm
Length: 2.7 cm



AS-30:
Height with solenoid: 8.2 cm
Length: 2.7 cm



AS-40:
Height with solenoid: 8.2 cm
Length: 2.7 cm

AS-50:
Height with solenoid: 8.2 cm
Length: 2.7 cm



AS-70:
Height with solenoid: 8.2 cm
Length: 2.7 cm

SRV

APPLICATION

Residential

SIZE

25 mm
(1" BSP)

FLOW RATE

0.25 to 7.0 m³/hr
4 to 115 l/min

WHERE DEPENDABILITY AND AFFORDABILITY ARE A QUESTION, SRV IS THE ANSWER.

FEATURES

- Application: Residential
- Size: 25 mm (1" BSP)
- Double-beaded diaphragm seal design for superior leak-free performance
- Captive bonnet bolts provide hassle-free valve maintenance
- Low flow capability allows use of Hunter's micro-irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 66° C
- Warranty period: 2 years
- DC latching solenoids enable Hunter's battery-powered controllers

ADVANCED FEATURES

- Flow control (SRV101 only)
- Reclaimed water ID handle (SRV101 only)
- Accu-Sync capable
- = Detailed descriptions on pages 54 and 55

OPERATING SPECIFICATIONS

Flow rate: 0.25 to 7 m³/hr; 4 to 115 l/minRecommended pressure range:
1.5 to 10 bar; 150 to 1000 kPa

FACTORY INSTALLED OPTIONS

Valve without solenoid

DC latching solenoid

USER INSTALLED OPTIONS

Solenoid conduit cover (P/N 464322)

DC latching solenoid (P/N 458200)


Accu-Sync pressure regulator

Reclaimed water ID (P/N 269205)

SRV Pressure Loss in kPa		SRV Pressure Loss in Bar	
l/min	25 mm Globe	m ³ /hr	25 mm Globe
4	7.6	0.3	0.08
20	13	1.0	0.10
40	13	2.5	0.13
55	13	3.5	0.13
75	22	4.5	0.21
95	35	5.5	0.30
115	43	7.0	0.46

Charts based on
full-open flow
control position

SRV-100G:
13 cm H x 11 cm L x 6 cm W

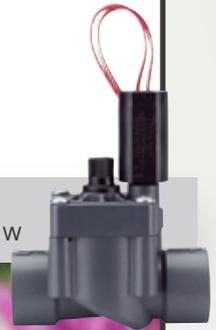

SRV-101G:
13 cm H x 11 cm L x 6 cm W

SPECIFICATIONBUILDER

www.hunterindustries.com/SRV

MODELS	INLET/ OUTLET	OPTIONS FACTORY INSTALLED	OPTIONS USER INSTALLED
SRV-100G = 25 mm (1" BSP) Globe valve, no flow control	(blank) = Female NPT S = Slip x slip B = BSP threads	DC = DC latching solenoid LS = Valve without solenoid	(blank) = No option R = Reclaimed water ID handle (except SRV-100G) DC = DC latching solenoid CC = Solenoid conduit cover AS-ADJ = Accu-Sync adjustable pressure regulator AS-20 = Accu-Sync 20: 1.4 bar pressure regulator AS-30 = Accu-Sync 30: 2.1 bar pressure regulator AS-40 = Accu-Sync 40: 2.8 bar pressure regulator AS-50 = Accu-Sync 50: 3.5 bar pressure regulator AS-70 = Accu-Sync 70: 4.8 bar pressure regulator
SRV-101G = 25 mm (1" BSP) Globe valve, with flow control			

EXAMPLES

SRV-100G - R	25 mm (1" BSP) Globe valve, no flow control, with reclaimed water ID handle
SRV-101G	25 mm (1" BSP) Globe valve, with flow control
SRV-100G - DC	25 mm (1" BSP) Globe valve, no flow control, with DC latching solenoid
SRV-101G - S - R	25 mm (1" BSP) Globe valve, with flow control, slip x slip, and reclaimed water ID handle

PGV

APPLICATION

Residential/Light Commercial

SIZE

25 mm, 40 mm, 50 mm
(1", 1½", 2" BSP)

FLOW RATE

0.05 to 34 m³/hr
0.7 to 570 l/min

THESE PROFESSIONAL GRADE VALVES ARE READY FOR ALL SYSTEM SIZES.

FEATURES

- Application (PGV100): Residential
- Application (PGV101, 151, 201): Residential/light commercial
- Sizes: 25 mm, 40 mm, 50 mm (1" BSP, 1½" BSP, 2" BSP)
- External and internal manual bleed allows quick and easy "at the valve" activation
- Double-beaded diaphragm seal design for superior leak-free performance
- Captive bonnet bolts provide

ADVANCED FEATURES

- Flow control (PGV-101, 151, and 201 only)
- Accu-Sync capable
- Reclaimed water ID handle (PGV-101, 151, and 201 only)
- = Detailed descriptions on pages 54 and 55

OPERATING SPECIFICATIONS (PGV-100, 101)

Flow rate: 0.05 to 7 m³/hr; 0.7 to 115 l/min
Recommended pressure range: 1.5 to 10 bar; 150 to 1000 kPa

OPERATING SPECIFICATIONS (PGV-151, 201)

Flow rate PGV-151: 5 to 27 m³/hr; 75 to 450 l/min
Flow rate PGV-201: 5 to 34 m³/hr; 75 to 570 l/min
Recommended pressure range: 1.5 to 10 bar; 150 to 1000 kPa

FACTORY INSTALLED OPTIONS

Valve without solenoid
DC latching solenoid

USER INSTALLED OPTIONS

Solenoid conduit cover (P/N 464322)
DC latching solenoid (P/N 458200)
Accu-Sync™ pressure regulator
Reclaimed water ID for PGV-101 models (P/N 269205) and PGV-151/201 models (P/N 607105)

hassle-free valve maintenance

- Low flow capability allows use of Hunter's micro irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 66° C
- Warranty period: 2 years
- DC latching solenoids enable Hunter's battery-powered controllers

PGV Pressure Loss in kPa

l/min	25 mm Globe	25 mm Angle	40 mm Globe	40 mm Angle	50 mm Globe	50 mm Angle
4	8.2	6.8				
20	9.7	6.8				
40	13	6.8				
55	11	6.8				
75	22	14	20	22	4.0	8.8
95	31	16	20	21	5.7	9.2
115	43	21	21	21	7.3	9.6
135			22	21	9.0	10
200			27	24	14	12
325			47	41	26	19
400			65	59	33	24
500			96	92	43	32
625					56	45
775					74	64

PGV Pressure Loss in Bar

m ³ /hr	25 mm Globe	25 mm Angle	40 mm Globe	40 mm Angle	50 mm Globe	50 mm Angle
0.25	0.10	0.07				
1	0.10	0.07				
2.50	0.12	0.08				
3.50	0.16	0.09				
4.50	0.22	0.12	0.21	0.22	0.08	0.08
7	0.44	0.22	0.22	0.21	0.08	0.08
9			0.24	0.21	0.09	0.09
11			0.26	0.23	0.11	0.09
13.50			0.31	0.26	0.14	0.10
18			0.44	0.37	0.21	0.14
22.50			0.62	0.53	0.31	0.22
27			0.84	0.75	0.44	0.33
30.50					0.56	0.45
34					0.70	0.59



PGV-100G:
13 cm H x 11 cm L x 6 cm W



PGV-101G:
13 cm H x 11 cm L x 6 cm W



PGV-151:
19 cm H x 15 cm L x 11 cm W



PGV-201:
20 cm H x 17 cm L x 13 cm W

VALVES

SPECIFICATIONBUILDER

www.hunterindustries.com/PGV

MODELS	INLET/OUTLET	OPTIONS FACTORY INSTALLED	OPTIONS USER INSTALLED
PGV-100G = 25 mm (1" BSP) Globe valve, no flow control	(blank) = Female NPT S = Slip x slip (excludes PGV-151 and PGV-201) B = BSP threads	(blank) = No option DC = DC latching solenoid LS = Valve without solenoid	(blank) = No option R = Reclaimed water ID handle (except PGV-100G) CC = Solenoid conduit cover DC = DC latching solenoid AS-ADJ = Accu-Sync adjustable pressure regulator AS-20 = Accu-Sync 20: 1.4 bar pressure regulator AS-30 = Accu-Sync 30: 2.1 bar pressure regulator AS-40 = Accu-Sync 40: 2.8 bar pressure regulator AS-50 = Accu-Sync 50: 3.5 bar pressure regulator AS-70 = Accu-Sync 70: 4.8 bar pressure regulator
PGV-101G = 25 mm (1" BSP) Globe valve, with flow control			
PGV-100A = 25 mm (1" BSP) Angle valve, no flow control			
PGV-101A = 25 mm (1" BSP) Angle valve, with flow control			
PGV-151 = 40 mm (1½" BSP) Globe/angle valve, with flow control			
PGV-201 = 50 mm (2" BSP) Globe/angle valve, with flow control			
PGV-100 = 25 mm (1" BSP) Globe valve, no flow control	MB = Male thread x 25 mm barb MM = Male x Male (NPT)		
PGV-101 = 25 mm (1" BSP) Globe valve, with flow control			

EXAMPLES

PGV-101G - B - DC	25 mm (1" BSP) Globe valve, with flow control, BSP threads, and DC latching solenoid
PGV-151 - B - AS	40 mm (1½" BSP) Globe/angle valve, BSP threads, and an Accu-Sync pressure regulator
PGV-201 - B	50 mm (2" BSP) Globe/angle valve, with flow control, and BSP threads

PGV JAR-TOP

APPLICATION
Residential

SIZE
**25 mm
(1" BSP)**

FLOW RATE
**0.04 to 6.8 m³/hr
0.7 to 114 l/min**

THE JAR-TOP MAKES THIS GO-TO VALVE AN EASY CHOICE WITH SIMPLE SERVICEABILITY.

FEATURES

- Application: Residential
- Size: 25 mm (1" BSP)
- External and internal manual bleed allows quick and easy "at the valve" activation
- Durable glass-filled nylon threaded bonnet ring allows easy access without tools
- Double-beaded diaphragm seal design for superior leak-free performance
- DC latching solenoids enable Hunter's battery-powered controllers
- Low flow allows use of Hunter's micro-irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 66° C
- Warranty period: 2 years

ADVANCED FEATURES

- Flow control (PGV101 Jar-Top only)
- Reclaimed water ID handle (PGV101 Jar-Top only)
- Accu-Sync capable
- = Detailed descriptions on pages 54 and 55

OPERATING SPECIFICATIONS

Flow Rate: 0.04 to 6.8 m³/hr; 0.7 to 114 l/min
Recommended pressure range: 1.5 to 10 bar; 150 to 1000 kPa

FACTORY INSTALLED OPTIONS


- Valve without solenoid
- DC latching solenoid

USER INSTALLED OPTIONS

- Solenoid conduit cover (P/N 464322)
- DC latching solenoid (P/N 458200)
- Accu-Sync pressure regulator
- Reclaimed water ID (P/N 269205)

PGV Jar-Top Pressure Loss in kPa		PGV Jar-Top Pressure Loss in Bar	
l/min	25 mm	m ³ /hr	25 mm
4	8.2	0.25	0.08
20	9.7	1	0.10
40	13	2.50	0.13
55	11	3.50	0.13
75	22	4.50	0.21
95	31	5.50	0.30
115	43	6.50	0.46

Charts based on full-open flow control position.

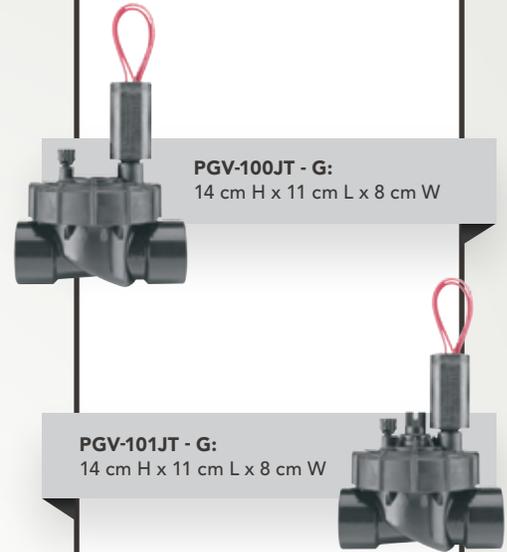

SPECIFICATIONBUILDER

www.hunterindustries.com/PGVJARTOP

MODELS	INLET/OUTLET	OPTIONS FACTORY INSTALLED	OPTIONS USER INSTALLED
PGV-100JT = 25 mm (1" BSP) Globe jar-top valve, no flow control	G = Female NPT GS = Slip x slip GB = BSP threads MM = Male x male (NPT) MMB = Male x male (BSP) MB = Male x 25 mm (1") barb MB075 = Male x 19 mm (3/4") barb MB125 = Male x 32 mm (1 1/4") barb	(blank) = No option LS = Less solenoid (Only available on 101JT-G, 100JT - G, 101JT-B, 100JT - GB) DC = DC latching solenoid	(blank) = No option R = Reclaimed water ID handle CC = Solenoid conduit cover DC = DC latching solenoid AS-ADJ = Accu-Sync adjustable pressure regulator AS-20 = Accu-Sync 20: 1.4 bar pressure regulator AS-30 = Accu-Sync 30: 2.1 bar pressure regulator AS-40 = Accu-Sync 40: 2.8 bar pressure regulator AS-50 = Accu-Sync 50: 3.5 bar pressure regulator AS-70 = Accu-Sync 70: 4.8 bar pressure regulator
PGV-101JT = 25 mm (1" BSP) Globe jar-top valve, with flow control			

EXAMPLES

PGV-101JT - GB	25 mm (1" BSP) Globe jar-top valve, with flow control, and female BSP
PGV-101JT - GS - R	25 mm (1" BSP) Globe jar-top valve, with flow control, slip x slip, and reclaimed water ID handle
PGV-101JT - GB - R	25 mm (1" BSP) Globe jar-top valve, with flow control, female BSP, and reclaimed water ID handle
PGV-100JT - MB075 - DC	25 mm (1" BSP) Globe jar-top valve, no flow control, with male x 19 mm (3/4") barb, and DC latching solenoid

VALVES

PGV-ASV

APPLICATION

Residential

SIZE

19 mm, 25 mm
(1" BSP)

FLOW RATE

0.05 to 7 m³/hr
0.7 to 115 l/min

PGV-ASV PROVIDES SIMPLE AND TROUBLE-FREE OPERATION WITHOUT THE NEED FOR A SEPARATE BACKFLOW PREVENTER.

FEATURES

- Application: Residential
- Sizes: 19 mm (¾"), 25 mm (1" BSP)
- External and internal manual bleed allows quick and easy "at the valve" activation
- Durable six-bolt bonnet design for maximum strength
- Removable anti-siphon cap for simple servicing
- Double-beaded diaphragm seal design for superior leak-free performance
- DC latching solenoids enable Hunter's battery-powered controllers
- Captive bonnet bolts provide hassle-free valve maintenance
- Low flow capability allows use of Hunter's micro irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 52° C
- Warranty period: 2 years

ADVANCED FEATURES

- Flow control
- Reclaimed water ID handle
- Accu-Sync™ capable
- = Detailed descriptions on pages 54 and 55

OPERATING SPECIFICATIONS

Flow rate: 0.05 to 67 m³/hr; 0.7 to 115 l/minRecommended pressure range:
1.5 to 10 bar; 150 to 1000 kPa

FACTORY INSTALLED OPTIONS

Valve without solenoid

USER INSTALLED OPTIONS

Solenoid conduit cover (P/N 464322)

DC latching solenoid (P/N 458200)

Accu-Sync™ pressure regulator

Reclaimed water ID (P/N 269205)

PGV-ASV Pressure Loss in kPa

l/min	19 mm	25 mm
4	7.7	7.7
20	11	11
40	18	18
55	24	24
75	34	34
95		47
115		62

PGV-ASV Pressure Loss in Bar

l/min	19 mm	25 mm
4	0.25	0.04
20	1	0.08
40	2.50	0.18
55	3.50	0.26
75	4.50	0.35
95		0.45
115		0.62

Charts based on
full-open flow
control position

PGV-075-ASV:

14 cm H x 11 cm L x 6 cm W



PGV-101-ASV:

14 cm H x 15.9 cm L
x 6 cm W

AVB-100:

11.4 cm H x 14.6 cm L x
7.6 cm W

SPECIFICATIONBUILDER

www.hunterindustries.com/PGVASV

MODELS	INLET/OUTLET	OPTIONS FACTORY INSTALLED	OPTIONS USER INSTALLED
PGV-075 = 19 mm (¾") Anti-siphon valves with flow control	ASV = Female NPT ASV-S = Slip x slip	LS = Valve without solenoid	(blank) = No option R = Reclaimed water ID handle DC = DC latching solenoid CC = Solenoid conduit cover AS-ADJ = Accu-Sync adjustable pressure regulator AS-20 = Accu-Sync 20: 1.4 bar pressure regulator AS-30 = Accu-Sync 30: 2.1 bar pressure regulator AS-40 = Accu-Sync 40: 2.8 bar pressure regulator AS-50 = Accu-Sync 50: 3.5 bar pressure regulator AS-70 = Accu-Sync 70: 4.8 bar pressure regulator
PGV-101 = 25 mm (1" BSP) Anti-siphon valves with flow control			

EXAMPLES

PGV-075 - ASV	19 mm (¾") Anti-siphon valves with flow control, and female NPT
PGV-101 - ASV-S - DC	25 mm (1" BSP) Anti-siphon valves with flow control, slip x slip, and DC latching solenoid
PGV-101 - ASV - R	25 mm (1" BSP) Anti-siphon valves with flow control, female NPT, and reclaimed water ID handle

MODEL

AVB-100 = 1" Atmospheric vacuum breaker/female NPT

AVB-100

ICV

APPLICATION
Commercial/Municipal

SIZES
25 mm, 40 mm, 50 mm, 80 mm
(1", 1 1/2", 2", 3" BSP)

FLOW RATE
0.06 to 68 m³/hr
0.4 to 1135 l/min

ICV IS ONE VALVE READY TO TAKE ON ANY COMMERCIAL HIGH-PRESSURE SYSTEM.

FEATURES

- Application: Commercial/municipal
- Sizes: 25 mm, 40 mm, 50 mm, 80 mm (1", 1 1/2", 2", 3" BSP)
- External and internal manual bleed allows quick and easy "at the valve" activation
- Glass-filled nylon construction resulting in the highest pressure rating
- Double-beaded diaphragm seal design for superior leak-free performance
- Fabric reinforced EPDM diaphragm and EPDM seat ensure superior performance in all water conditions
- DC latching solenoids enable Hunter's battery-powered controllers control of the valve
- Captive bonnet bolts provide hassle-free valve maintenance
- Low flow capability allows use Hunter's micro-irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 66° C
- Warranty period: 5 years

ADVANCED FEATURES

- Flow control
- Filter Sentry™
- = Detailed descriptions on pages 54 and 55
- Reclaimed water ID handle
- Accu-Sync™ capable

OPERATING SPECIFICATIONS

25 mm Flow rate: 0.06 to 9 m³/hr;
0.4 to 150 l/min
40 mm Flow rate: 17 to 31 m³/hr;
75 to 510 l/min
50 mm Flow rate: 9 to 34 m³/hr;
150 to 560 l/min
80 mm Flow rate: 34 to 68 m³/hr;
560 to 1135 l/min
Recommended pressure range:
1.5 to 15.0 bar; 150 to 1500 kPa

FACTORY INSTALLED OPTIONS


Valve without solenoid
DC latching solenoid
Filter Sentry

USER INSTALLED OPTIONS

Solenoid conduit cover (P/N 464322)
DC latching solenoid (P/N 458200)
Accu-Sync pressure regulator
Reclaimed water ID for ICV101, 151, and 201 (P/N 561205) and 301 (P/N 515005)

l/min	ICV Pressure Loss in kPa				80 mm Globe Angle	m ³ /hr	ICV Pressure Loss in Bar				
	25 mm	40 mm	50 mm	80 mm			25 mm	40 mm	50 mm	80 mm	
1	14					0.05	0.14				
2	14					0.10	0.14				
4	14					0.25	0.14				
20	17					1	0.17				
40	20					2.50	0.19				
60	20					3.50	0.21				
75	20	9.6				4.50	0.24	0.10			
115	29	10				7	0.33	0.11			
150	48	12	5.0			9	0.45	0.12	0.05		
190		15	7.0			11		0.15	0.07		
225		18	9.3			13.50		0.20	0.10		
280		26	14			17		0.29	0.15		
340		37	20			20.50		0.42	0.22		
380		46	26			23		0.52	0.28		
450		65	36			27		0.72	0.39		
510		84	47			30.50		0.93	0.50		
565		104	57	16	12	34		1.2	0.63	0.15	0.13
660			79	22	17	40			0.88	0.20	0.16
750			103	29	23	45.50			1.2	0.26	0.23
850				38	30	51				0.34	0.30
950				47	38	57				0.43	0.38
1050				58	47	62.50				0.53	0.48
1135				69	56	68				0.64	0.59

Charts based on full-open flow control position

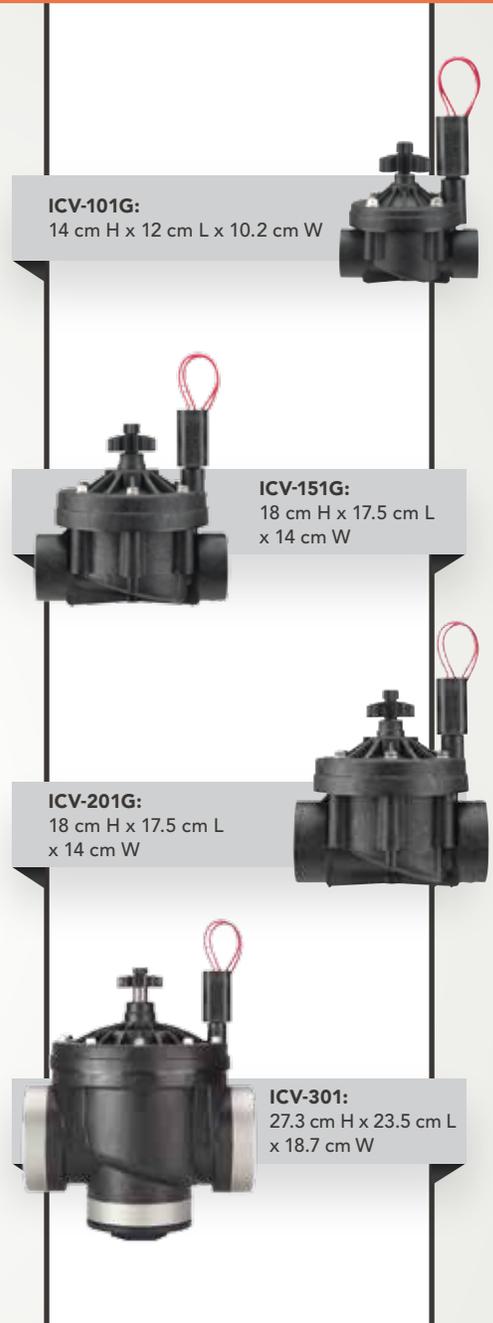

SPECIFICATIONBUILDER

www.hunterindustries.com/ICV

MODELS	INLET/OUTLET	OPTIONS FACTORY INSTALLED	OPTIONS USER INSTALLED
ICV-101G = 25 mm (1" BSP) globe valve	(blank) = NPT threads B = BSP threads	(blank) = No option FS = Filter Sentry DC = DC latching solenoid	(blank) = No option R = Reclaimed water ID tag CC = Solenoid conduit cover DC = DC latching solenoid AS-ADJ = Accu-Sync adjustable pressure regulator AS-20 = Accu-Sync 20: 1.4 bar pressure regulator AS-30 = Accu-Sync 30: 2.1 bar pressure regulator AS-40 = Accu-Sync 40: 2.8 bar pressure regulator AS-50 = Accu-Sync 50: 3.5 bar pressure regulator AS-70 = Accu-Sync 70: 4.8 bar pressure regulator
ICV-151G = 40 mm (1 1/2" BSP) globe valve			
ICV-201G = 50 mm (2" BSP) globe valve			
ICV-301 = 80 mm (3" BSP) globe/angle valve			

EXAMPLES

ICV-101G - B	25 mm (1" BSP) globe valve, and BSP threads
ICV-151G - B - FS - R	40 mm (1 1/2" BSP) globe valve, BSP threads, Filter Sentry™, and reclaimed water ID handle

VALVES

IBV

APPLICATION

Commercial/Municipal

SIZES

25 mm, 40 mm, 50 mm, 80 mm
(1", 1 1/2", 2", 3" BSP)

FLOW RATE

0.06 to 68 m³/hr
0.4 to 1135 l/min

THE HIGH-END IBV BRASS VALVE WAS DESIGNED FOR THE RIGORS OF A COMMERCIAL SITE.

FEATURES

- Application: Commercial/municipal
- Sizes: 25 mm, 40 mm, 50 mm, 80 mm (1" BSP, 1 1/2" BSP, 2" BSP, 3" BSP)
- External and internal manual bleed allows quick and easy "at the valve" activation
- Double-beaded diaphragm seal design for superior leak-free performance
- Fabric reinforced EPDM diaphragm and EPDM seat ensure superior performance in all conditions
- DC latching solenoids enable Hunter's battery-powered controllers
- Captive bonnet bolts providing hassle-free valve maintenance
- Low flow capability allows use of Hunter's micro irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 66° C
- Warranty period: 5 years

ADVANCED FEATURES

- Flow control
- Filter Sentry™
- Accu-Sync™ capable

•• = Detailed descriptions on pages 54 and 55

OPERATING SPECIFICATIONS

25 mm Flow rate: 0.06 to 9 m³/hr;
0.4 to 150 l/min

40 mm Flow rate: 17 to 31 m³/hr;
75 to 510 l/min

50 mm Flow rate: 9 to 34 m³/hr;
150 to 560 l/min

80 mm Flow rate: 34 to 68 m³/hr;
560 to 1135 l/min

Recommended pressure range:
1.5 to 15 bar; 150 to 1500 kPa

FACTORY INSTALLED OPTIONS

Valve without solenoid
DC latching solenoid
Filter Sentry

USER INSTALLED OPTIONS

Solenoid conduit cover (P/N 464322)
DC latching solenoid (P/N 45800)
Accu-Sync pressure regulator
Reclaimed water ID (P/N 269205)


IBV Pressure Loss in kPa

l/min	IBV Pressure Loss in kPa				m ³ /hr	IBV Pressure Loss in Bar			
	25 mm	40 mm	50 mm	80 mm		25 mm	40 mm	50 mm	80 mm
1.0	14				0.05	0.14			
2.0	14				0.10	0.14			
4.0	14				0.25	0.14			
20.0	17				1.00	0.17			
40.0	20				2.50	0.19			
60.0	20				3.50	0.21			
75.0	20	9.6			4.50	0.24	0.10		
115.0	29	10			7.00	0.33	0.11		
150.0	48	12	5.0		9.00	0.45	0.12	0.05	
190.0		15	7.0		11.00		0.15	0.07	
225.0		18	9.3		13.50		0.20	0.10	
280.0		26	14		17.00		0.29	0.15	
340.0		37	20		20.50		0.42	0.22	
380.0		46	26		23.00		0.52	0.28	
450.0		65	36		27.00		0.72	0.39	
510.0		84	47		30.50		0.93	0.50	
565.0		104	57	16	34.00		1.2	0.63	0.15
660.0			79	22	40.00			0.88	0.20
750.0			103	29.0	45.50			1.2	0.26
850.0				38	51.00				0.34
950.0				47	57.00				0.43
1050.0				58	62.50				0.53
1135.0				69	68.00				0.64

Charts based on full-open flow control position



IBV-101G:
11.4 cm H x 9.3 cm L x 13.1 cm W

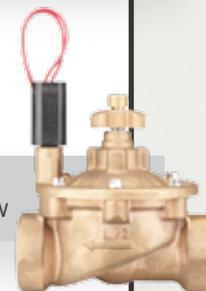

IBV-151G:
15.7 cm H x 13.2 cm L x 16.3 cm W



IBV-201G:
15.4 cm H x 13.2 cm L x 17.6 cm W



IBV-301G:
23.6 cm H x 18.3 cm L x 23 cm W

SPECIFICATIONBUILDER

www.hunterindustries.com/IBV

MODELS	INLET/OUTLET	OPTIONS FACTORY INSTALLED	OPTIONS USER INSTALLED
IBV-101G = 25 mm (1" BSP) globe valve	(blank) = NPT threads B = BSP threads	(blank) = No option FS = Filter Sentry DC = DC latching solenoid LS = Valve without solenoid	(blank) = No option R = Reclaimed water ID tag CC = Solenoid conduit cover DC = DC latching solenoid AS-ADJ = Accu-Sync adjustable pressure regulator AS-20 = Accu-Sync 20: 1.4 bar pressure regulator AS-30 = Accu-Sync 30: 2.1 bar pressure regulator AS-40 = Accu-Sync 40: 2.8 bar pressure regulator AS-50 = Accu-Sync 50: 3.5 bar pressure regulator AS-70 = Accu-Sync 70: 4.8 bar pressure regulator
IBV-151G = 40 mm (1 1/2" BSP) globe valve			
IBV-201G = 50 mm (2" BSP) globe valve			
IBV-301G = 80 mm (3" BSP) globe valve			

EXAMPLES

IBV-151G - B - FS - R	40 mm (1 1/2" BSP) globe valve, BSP threads, Filter Sentry, and reclaimed water ID tag
IBV-101G - B	25 mm (1" BSP) globe valve, and BSP threads

QUICK COUPLERS

APPLICATION
Commercial

QUICK COUPLERS WITH ULTRA STURDY RED BRASS AND STAINLESS STEEL CONSTRUCTION ADD VALUE TO ANY PROJECT.

FEATURES

- 100% Interchangeable with Rain Bird®, Toro®, and Buckner®
- Red brass and stainless steel construction
- TuffTop™ thermoplastic locking and non-locking covers
- WingThing™ stabilization and acme key connection
- Stainless steel lug on 1" and 1¼" keys
- Spring-loaded covers with stainless steel springs for positive closing and protection of valve's sealing components



See page 105 for replacement guide

MODEL	INLET THREADS	SLOTS	BODY	COLOUR *	LOCKING	KEY	SWIVELS
HQ-3RC	3/4" NPT	2	1 - Piece	Yellow	No	HK-33	HS-0
HQ-33DRC	3/4" NPT	2	2 - Piece	Yellow	No	HK-33	HS-0
HQ-33DLRC	3/4" NPT	2	2 - Piece	Yellow	Yes	HK-33	HS-0
HQ-44RC	1" NPT	1	2 - Piece	Yellow	No	HK-44	HS-1 or HS-2
HQ-44LRC	1" NPT	1	2 - Piece	Yellow	Yes	HK-44	HS-1 or HS-2
HQ-44RC-AW	1" NPT	Acme	2 - Piece Wing†	Yellow	No	HK-44A	HS-1 or HS-2
HQ-44LRC-AW	1" NPT	Acme	2 - Piece Wing†	Yellow	Yes	HK-44A	HS-1 or HS-2
HQ-5RC	1" NPT	2	1 - Piece	Yellow	No	HK-55	HS-1 or HS-2
HQ-5LRC	1" NPT	2	1 - Piece	Yellow	Yes	HK-55	HS-1 or HS-2
HQ-5RC-B	1" BSP	2	1 - Piece	Yellow	No	HK-55	HS-1-B or HS-2-B
HQ-5LRC-B	1" BSP	2	1 - Piece	Yellow	Yes	HK-55	HS-1-B or HS-2-B

* All locking cover models are available with purple covers for reclaimed water applications.

† Anti-rotation stabilization wings.

SPECIFICATIONBUILDER

www.hunterindustries.com/HQ

HQ - VALVE MODELS	COVER OPTIONS	ADDITIONAL OPTIONS
HQ3 = 19 mm (¾") Inlet, 1-piece body, 2 slots	RC = Yellow rubber cover LRC = Yellow locking rubber cover (Not available for the HQ3 body)	(blank) = No option AW = Acme key with anti-rotation wings* BSP = BSP threads† R = Purple locking cover (reclaimed water ID)‡
HQ5 = 25 mm (1") Inlet, 1-piece body, 2 slots		
HQ33D = 19 mm (¾") Inlet, 2-piece body, 2 slots		
HQ44 = 25 mm (1") Inlet, 2-piece body, 1 slot or Acme		

EXAMPLES

HQ3 - RC	HQ3 valve with rubber cover
HQ44 - LRC	HQ44 valve with locking rubber cover
HQ44 - LRC - R	HQ44 valve with locking rubber cover and reclaimed water ID
HQ44 - LRC - AW - R	HQ valve, locking rubber cover, acme key socket, anti-rotation wings and reclaimed ID
HQ5 - LRC - BSP	HQ5 valve with locking rubber cover and BSP body inlet threads

* only available in body HQ44

† only available in body HQ5

‡ only available LRC models

HK - KEY MODELS	COMPATIBLE VALVE	COMPATIBLE SWIVEL
HK33 = 19 mm (¾") valve, 19 mm (¾") key inlet	HQ3, HQ33	HS0
HK44 = 25 mm (1") valve, 25 mm (1") key inlet	HQ44	HS1, HS2, HS1B, HS2B
HK44A = 25 mm (1") valve, acme key inlet	HQ44AW	HS1, HS2, HS1B, HS2B
HK55 = 25 mm (1") valve, 32 mm (1¼") key inlet	HQ5	HS1, HS2, HS1B, HS2B

EXAMPLE

HK-44




All locking models have an optional purple TuffTop™ cover for sites using reclaimed water.

HOSE SWIVELS	COMPATIBLE KEY
HS0 = 19 mm (¾") inlet, 19 mm (¾") hose outlet	HK33
HS1 = 25 mm (1") inlet, 19 mm (¾") hose outlet	HK44, HK44A, HK55
HS2 = 25 mm (1") inlet, 25 mm (1") hose outlet	HK44, HK44A, HK55
HS1B = 25 mm (1") inlet, 19 mm (¾") BSP outlet	HK44, HK44A, HK55
HS2B = 25 mm (1") inlet, 25 mm (1") BSP outlet	HK44, HK44A, HK55

EXAMPLE

HS-1

VALVES

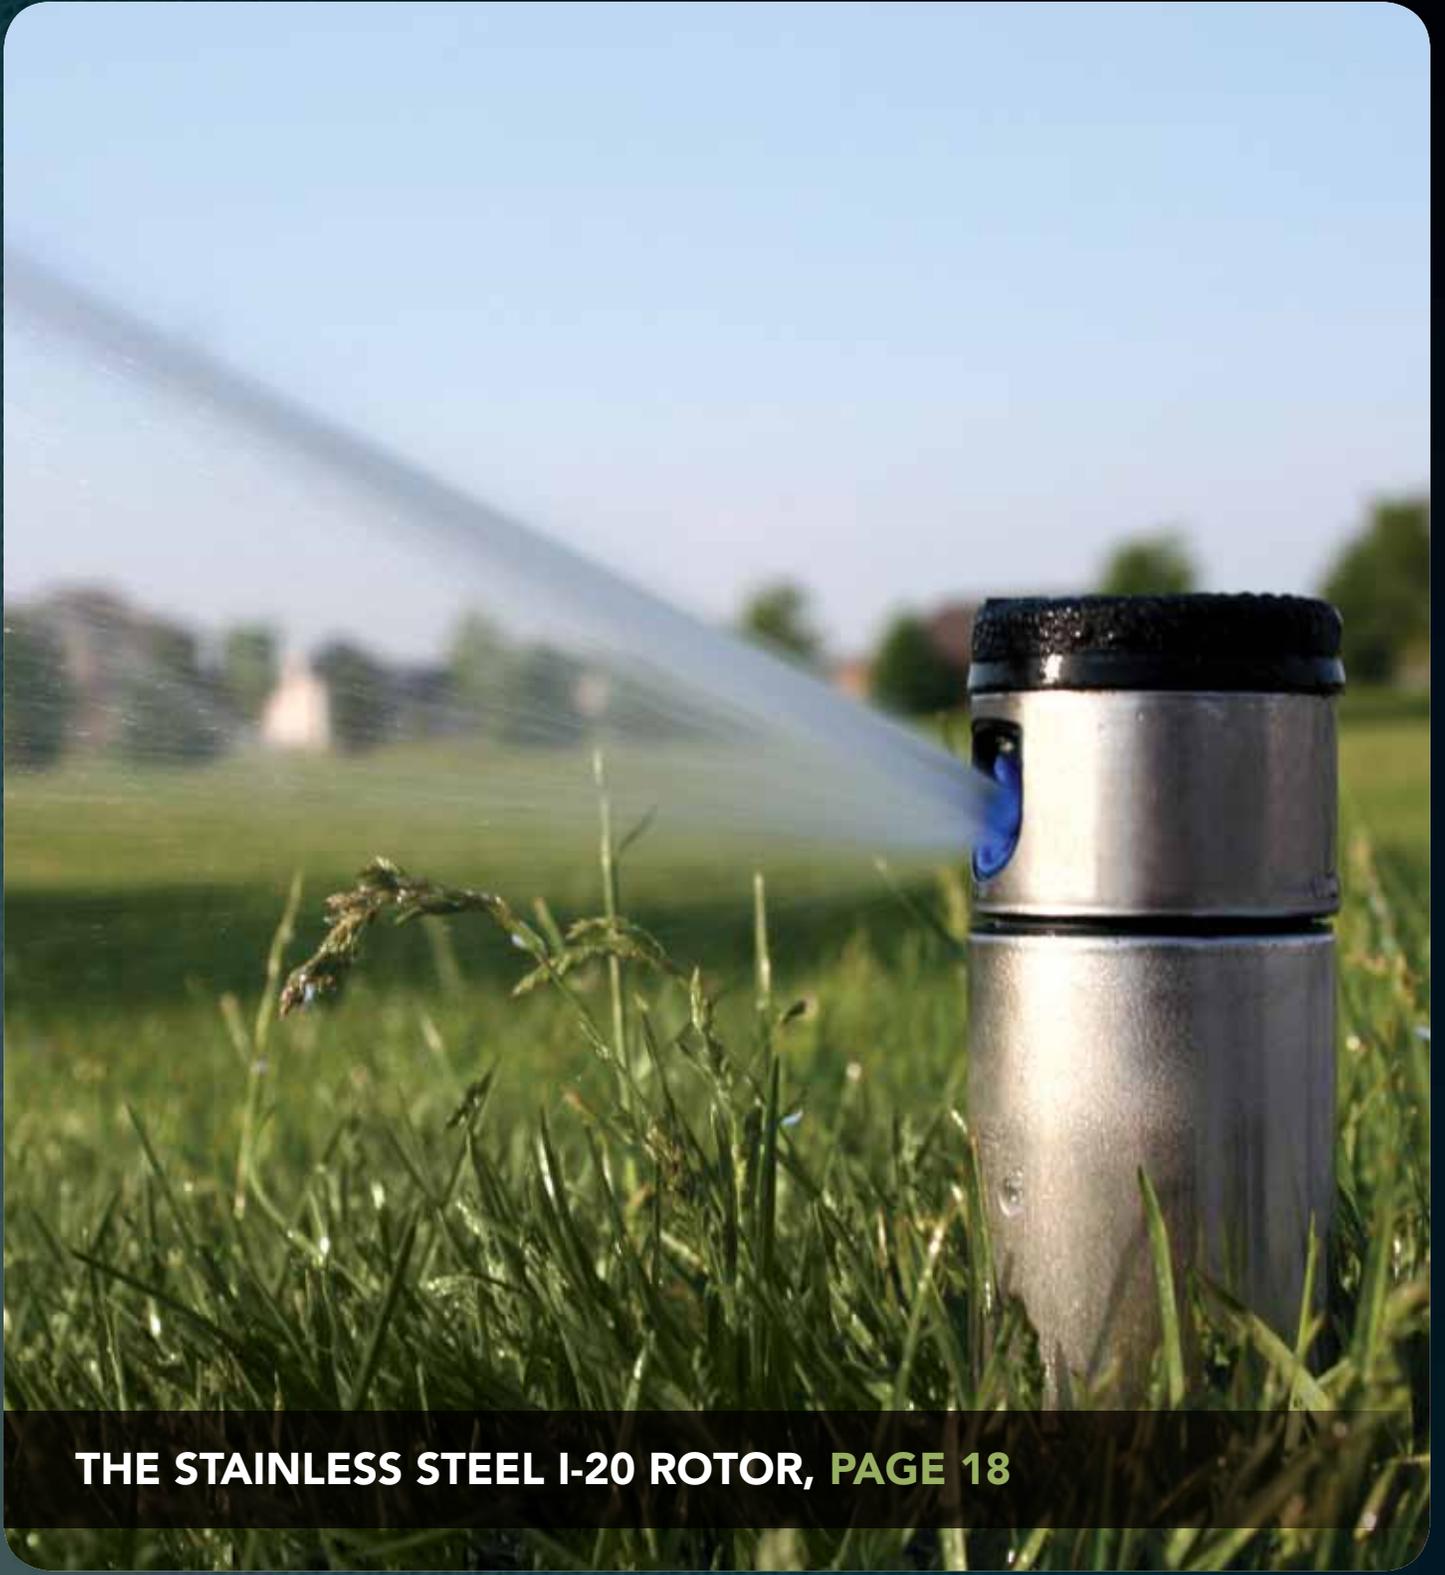

THE STAINLESS STEEL I-20 ROTOR, PAGE 18



TAKE COMMAND. Even the best system will fall short without the brains to back it up. With a Hunter controller at the helm, smart irrigation becomes simple irrigation with user-friendly operation, water-conserving features, and optional modularity.

CONTROLLERS

COMPARISON CHART

	X-CORE	PCC	PRO-C	ICC	I-CORE	ACC	SVC*	WVS*	XC HYBRID*	ELC
APPLICATIONS										
Residential	•	•	•				•	•	•	•
Light commercial		•	•				•	•	•	
Commercial				•	•		•	•	•	
High-end commercial						•	•	•	•	
TYPE										
Fixed	•	•					•	•	•	•
Modular			•	•	•	•				
Decoder					•	•				
Indoor	•	•	•							•
Outdoor	•	•	•	•	•	•	•	•	•	
FEATURES										
Number of stations	2, 4, 6, 8	6, 9, 12, 15	3 to 15	8 to 48	6 to 42† 1 to 48‡	12 to 42† 1 to 99‡	1, 2, 4	1, 2, 4	4, 6, 8, 10, 12	4, 6
Independent programs	3	3	3	4	4	6	Program by station	Program by station	3	3
Start times per program	4	4	4	8	8 (A, B, C) 16 (D)	10	9	9	4	4
Max. station run time (hrs)	4	6	6	12	12	6	4	4	4	4

* Battery controller
 † Conventional controller
 ‡ Decoder controller

ADVANCED FEATURES

AUTOMATIC SHORT CIRCUIT PROTECTION

Automatic short circuit protection, found in all Hunter AC powered controllers, automatically detects electrical faults typically caused by wiring issues or damage. Shorted stations are skipped, allowing watering to continue for those stations that are not faulty. No fuses to blow or internal circuit breakers to trip that can result in completely disabling irrigation.

X-CORE, PCC, PRO-C, ICC, I-CORE, ACC, ECO LOGIC

CYCLE AND SOAK

Water-saving feature that allows the operator to specify a maximum run time for each single station, followed by a minimum soak time, to prevent runoff from slopes or saturated soil. The operator can enter any run time, and the controller will automatically divide it into cycles to allow the water to be absorbed during the soak periods. The feature is adjustable by individual station for unique soil and site conditions.

ICC, I-CORE, ACC

DELAY BETWEEN STATIONS

A delay in watering between individual stations as the controller steps sequentially through zones of irrigation. The delay may range from a few seconds, to permit slow-closing valves time to shut down, or much longer to allow pressure tanks, etc., to refill or recharge.

X-CORE, PCC, PRO-C, ICC, I-CORE, ACC

SEASONAL ADJUSTMENT

This feature allows for quick adjustments to irrigation run times through a percentage scale. During peak season, set the seasonal adjust to 100%. If weather conditions require less water, enter the appropriate percentage value (i.e. 50%) to cut down irrigation run times without the need to adjust each station in the program. Hunter offers three different ways to use Seasonal Adjustment to reduce water usage:

Globally: Provides a seasonal adjustment value to all controller programs (available on most Hunter controllers)

Monthly: Allows user to program seasonal adjustment values for each month of the year (available on I-Core controller). The controller will automatically change the programmed seasonal adjustment value at the first day of every month.

Daily (Solar Sync ET sensor): Implements an automatic daily adjustment based on measured local weather (available for most Hunter controllers)

X-CORE, PCC, PRO-C, ICC, I-CORE, ACC, XC HYBRID, ECO LOGIC

EASY RETRIEVE™

A manual back-up utility that stores a complete controller's schedule and setup information in back-up memory. This allows the saved watering schedule to be restored at any time. This can be used to set a controller back to the initial settings after tampering or at the beginning of a new season.

X-CORE, PCC, PRO-C, I-CORE, ACC, XC HYBRID

EVENT DAY OFF PROGRAMMING

Day(s) of the week can be programmed Off in advance, so that irrigation does not occur regardless of program interval schedules. For example, if the gardener mows the lawn on Saturday, the Event Day Off feature allows Saturday to be programmed Off, so that watering will not occur.

PCC, PRO-C, I-CORE

NO WATER WINDOW

User-specified periods of time during which the controller will not allow automatic irrigation. No Water Window can be used to comply with local watering restrictions or to prevent conflicts with pedestrian traffic. This setting does not affect manual watering options for local maintenance.

I-CORE, ACC

PROGRAMMABLE RAIN DELAY

A user-specified number of days for the controller to remain in Off mode, but then automatically revert to automatic irrigation. This will prevent watering during an extended period of inclement weather, but will resume watering automatically without requiring a return visit to the controller. The controller displays the number of days remaining before watering resumes.

X-CORE, PCC, PRO-C, ICC, I-CORE, ACC, XC HYBRID, ECO LOGIC

QUICK CHECK™

This feature allows for the quick diagnosis of wiring problems to valves in the field instead of checking each field wiring circuit for potential problems. Quick Check can detect a field wiring short and displays an "ERR" and station number on the display.

X-CORE, PCC, PRO-C, ICC, I-CORE, ACC, ECO LOGIC

REAL TIME FLOW MONITORING

This feature permits connection of a flow meter to recognize high or low flow conditions and react automatically to alarms. The controller learns typical flows for each zone of irrigation and then monitors performance during automatic irrigation. When incorrect flows are detected, the controller can identify the faulty station and shut it down. Used with a normally-closed Master Valve. Alarm parameters are user-programmable. Flow totals are also recorded in controller memory to verify system water usage.

I-CORE, ACC

SENSOR PROGRAMMABILITY

The ability to specify which program or stations will be shut down in response to a specific sensor alarm. This allows stations or programs unaffected by the sensor to continue automatic operations.

X-CORE, PCC, PRO-C, I-CORE, ACC, XC HYBRID

SIMULTANEOUS STATION GROUPS

The ability to group stations into larger irrigation units that run together within automatic programs. This permits consolidation of large systems into fewer items to program and can be used to control system flow in high capacity installations.

ACC

TOTAL RUN TIME CALCULATOR

This feature adds up all run times, and calculates the total duration of a program or to instantly display the full length of an irrigation cycle. This information can be used to determine the time of day at which watering will end.

PCC, PRO-C, I-CORE, ACC

NON-VOLATILE MEMORY

This feature offers protection against unreliable power, retaining current time, day, and program data.

X-CORE, PCC, PRO-C, ICC, I-CORE, ACC, XC HYBRID, ECO LOGIC

X-CORE

APPLICATION

Residential

NUMBER OF STATIONS

2, 4, 6, 8

TYPE

Fixed

THIS ENTRY-LEVEL CONTROLLER NOW GETS SMART WITH THE OPTIONAL SOLAR SYNC.

FEATURES

- Number of stations: 2, 4, 6, 8
- Type: Fixed
- Enclosures: Indoor and outdoor
- Independent programs: 3
- Start times per program: 4
- Max. station run time: 4 hrs
- Warranty period: 2 years

ADVANCED FEATURES

- Easy Retrieve™ memory
- Compatible with Hunter Klik sensors and other micro-switch type weather sensors
- One touch manual start and advance for easy manual operation
- Rain sensor bypass
- Programmable rain delay: 1 to 7 days
- Test program allows for quick system checks
- Manual cycle
- Quick Check™
- Non-volatile memory
- Automatic short circuit protection
- Seasonal adjustment (global): 10% to 150% (in 10% increments)
- Delay between stations (maximum): 4 hrs
- Sensor programmable by zone
- Remote control operation with Hunter ROAM and ICR remotes
- Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor

•• = Detailed descriptions on pages 66 and 67

ELECTRICAL SPECIFICATIONS

Transformer input: 120 VAC or 230/240 VAC (international model)
 Transformer output (24 VAC): 1 A
 Station output (24 VAC): 0.56 A
 P/MV output (24 VAC): 0.56 A

Simultaneous station operation (includes master valve): 3 valves
 Pump/master valve
 Sensor inputs: 1
 Operating temperature: -18° C to 66° C

APPROVALS

CE, UL, cUL, C-tick, FCC



Plastic indoor:
16.5 cm H x 14.6 cm W x 5 cm D



Plastic outdoor:
22 cm H x 17.8 cm W x 9.5 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/XCORE

MODELS	TRANSFORMER	INDOOR/ OUTDOOR	OPTIONS
XC-2 = 2 Stations (indoor model only)	00 = 120 VAC 01 = 230/240 VAC	(blank) = Outdoor model i = Indoor model	(blank) = No option E = 230/240 VAC with European connections A = 230/240 VAC with Australian connections (outdoor model has internal transformer with cord)
XC-4 = 4 Stations			
XC-6 = 6 Stations			
XC-8 = 8 Stations			

EXAMPLES

XC-201i - E	2-Station 230/240 VAC indoor controller, with plastic cabinet
XC-401 - A	4-Station 230/240 VAC outdoor controller, with plastic cabinet
XC-601i - E	6-Station 230/240 VAC indoor controller, with plastic cabinet
XC-801 - A	8-Station 230/240 VAC outdoor controller, with plastic cabinet

CONTROLLERS

PCC

APPLICATION

Residential/Light Commercial

NUMBER OF STATIONS

6, 9, 12, 15

TYPE

Fixed

THE PRO-C CONVENTIONAL'S FIXED-STATION CONTROL IS A COST-EFFECTIVE CHOICE.

FEATURES

- Number of stations: 6, 9, 12, 15
- Type: Fixed
- Enclosures: Indoor and outdoor
- Independent programs: 3
- Start times per program: 4
- Max. station run time: 6 hrs
- Warranty period: 2 years

ADVANCED FEATURES

- Easy Retrieve™ memory
 - Compatible with Hunter Klik sensors and other micro-switch type weather sensors
 - One touch manual start and advance for easy manual operation
 - Rain sensor bypass
 - Programmable rain delay: 1 to 7 days
 - Manual cycle
 - Test program allows for quick system checks
 - Quick Check™
 - Non-volatile memory
 - Automatic short circuit protection
 - Seasonal adjustment (global): 5% to 300% (in 5% increments)
 - Delay between stations (maximum): 4 hrs
 - Sensor programmable by zone
 - Total run time calculator
 - Event day off programming
 - Central control compatible with Hunter IMMS™
 - Remote control operation with Hunter ROAM and ICR remotes
 - Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor or ET system
- = Detailed descriptions on pages 66 and 67

ELECTRICAL SPECIFICATIONS

Transformer input: 120 VAC or 230/240 VAC (international model)
 Transformer output (24 VAC): 1 A
 Station output (24 VAC): 0.56 A
 P/MV output (24 VAC): 0.56 A

Simultaneous station operation (includes master valve): 3 valves
 Pump/master valve
 Sensor inputs: 1
 Operating temperature: -18° C to 66° C

APPROVALS

CE, UL, cUL, C-tick, FCC



Plastic indoor:
21.1 cm H x 24.4 cm W x 9.4 cm D



Plastic outdoor:
22.6 cm H x 25.1 cm W x 10.9 cm D

CONTROLLERS

SPECIFICATIONBUILDER

www.hunterindustries.com/PCC

MODELS	TRANSFORMER	INDOOR/ OUTDOOR	OPTIONS
PCC-6 = 6 Stations	00 = 120 VAC 01 = 230/240 VAC	(blank) = Outdoor model i = Indoor model	(blank) = No option E = 230/240 VAC with European connections A = 230/240 VAC with Australian connections (outdoor model has internal transformer with cord)
PCC-9 = 9 Stations			
PCC-12 = 12 Stations			
PCC-15 = 15 Stations			

EXAMPLES

PCC-1201i - A	12-Station indoor controller 230/240 VAC and plastic cabinet
PCC-601 - E	6-Station outdoor controller 230/240 VAC and plastic cabinet
PCC-901i - E	9-Station indoor controller 230/240 VAC and plastic cabinet

PRO-C

APPLICATION
Residential/Light Commercial

NUMBER OF STATIONS
3 to 15

TYPE
Modular

MODULARITY MEANS COMPLETE CUSTOMIZATION FROM 3 TO 15 STATIONS.

FEATURES

- Number of stations: 3 to 15
- Type: Modular
- Enclosures: Indoor and outdoor
- Independent programs: 3
- Start times per program: 4
- Max. station run time: 6 hrs

ADVANCED FEATURES

- Easy Retrieve™ memory
 - Compatible with Hunter Klik sensors and other micro-switch type weather sensors
 - One touch manual start and advance for easy manual operation
 - Rain sensor bypass
 - Programmable rain delay: 1 to 7 days
 - Manual cycle
 - Test program allows for quick system checks
 - Quick Check™
 - Non-volatile memory
 - Automatic short circuit protection
 - Seasonal adjustment (global): 5% to 300% (in 5% increments)
 - Delay between stations (maximum): 4 hrs
 - Sensor programmable by zone
 - Total run time calculator
 - Event day off programming
 - Central control compatible with Hunter IMMS™
 - Remote control operation with Hunter ROAM and ICR remotes
 - Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor or ET system
- = Detailed descriptions on pages 60 and 61

ELECTRICAL SPECIFICATIONS

Transformer input: 120 VAC or 230/240 VAC (international model)
Transformer output (24 VAC): 1 A
Station output (24 VAC): 0.56 A
P/MV output (24 VAC): 0.56 A

Simultaneous station operation (includes master valve): 3 valves
Pump/master valve
Sensor inputs: 1
Operating temperature: -18° C to 66° C

APPROVALS

CE, UL, cUL, C-tick, FCC



Plastic indoor:
21.1 cm H x 24.4 cm W x 9.4 cm D



Plastic outdoor:
22.6 cm H x 25.1 cm W x 10.9 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/PROC

BASE MODELS	OPTIONS
PC-300i = 3-Station indoor Pro-C controller, plug-in transformer	(blank) = No option
PC-300 = 3-Station outdoor Pro-C controller, internal transformer	
PC-301i = International version 3-Station indoor Pro-C controller, plug-in transformer	E = 230/240 VAC with European connections A = 230/240 VAC with Australian connections (outdoor model has internal transformer with cord)
PC-301 = International version 3-Station outdoor Pro-C controller, internal transformer	

STATION EXPANSION MODULES

PCM-300 = 3-Station plug-in module: Use to increase station count from 3 to 6, 6 to 9, and 9 to 12
PCM-900 = 3-Station plug-in module: Use to increase station count from 6 to 15 only



EXAMPLES

PC-301i - E	3-Station indoor base unit, 230/240 VAC, and plastic cabinet
PC-601i - A	3-Station indoor base unit, one PCM-300 module, 230/240 VAC, and plastic cabinet
PC-901i - E	3-Station indoor base unit, two PCM-300 modules, 230/240 VAC, and plastic cabinet
PC-1201 - A	3-Station outdoor base unit, three PCM-300 modules, 230/240 VAC, and plastic cabinet
PC-1501 - E	3-Station outdoor base unit, one PCM-300 module, one PCM-900 module, 230/240 VAC, and plastic cabinet

CONTROLLERS



APPLICATION: Commercial NUMBER OF STATIONS: 8 to 48 TYPE: Modular

CUSTOMISABLE UP TO 48 STATIONS, THIS COMMERCIAL CONTROLLER KNOWS WHAT YOU NEED.

FEATURES

- Number of stations: 8 to 48
- Type: Modular
- Enclosure: Outdoor
- Independent programs: 4
- Start times per program: 8
- Max. station run time: 12 hrs
- Warranty period: 5 years

ADVANCED FEATURES

- Compatible with Hunter Klik sensors and other micro-switch type weather sensors
- One touch manual start and advance for easy manual operation
- Rain sensor bypass
- Programmable rain delay: 1 to 7 days
- Manual cycle
- Test program allows for quick system checks
- Quick Check™
- Non-volatile memory
- Automatic short circuit protection
- Seasonal adjustment (global): 10% to 150% (in 10% increments)
- = Detailed descriptions on pages 66 and 67
- Delay between stations (maximum): 10 hrs
- Simultaneous program operation: Program D can run concurrently with A, B, or C
- Cycle and Soak
- Central control compatible with Hunter IMMS™
- Remote control operation with Hunter ROAM and ICR remotes
- Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor or ET system

ELECTRICAL SPECIFICATIONS

Transformer input: 120/240 VAC, 50/60 Hz
 Transformer output (24 VAC): 1.4 A
 Dual voltage transformer (120/240 VAC)
 Station output (24 VAC): 0.56 A
 P/MV output (24 VAC): 0.28 A

Simultaneous station operation (includes master valve): 5 valves
 Pump/master valve
 Sensor inputs: 1
 Operating temperature: -18° C to 66° C

APPROVALS

CE, UL, cUL, C-tick, FCC



Plastic outdoor:
25.7 cm H x 33.7 cm W x 12.1 cm D

Powder coated metal outdoor: 40.6 cm H x 31.1 cm W x 12.1 cm D

Stainless steel outdoor:
40.6 cm H x 31.1 cm W x 12.1 cm D

Plastic pedestal:
97 cm H x 52 cm W x 38 cm D

CONTROLLERS

SPECIFICATIONBUILDER

www.hunterindustries.com/ICC

BASE MODELS	OPTIONS USER INSTALLED
ICC-800-PL = 8-Station ICC controller, internal transformer, plastic cabinet	(blank) = No option PED = Optional metal pedestal for metal cabinet models
ICC-801-PL = International version, 8-station ICC controller, internal transformer, plastic cabinet	PED-SS = Optional stainless steel pedestal for stainless steel cabinet models
ICC-800-M = 8-Station ICC controller, internal transformer, metal cabinet	PWB = Pedestal wiring board needed for both PED and PED-SS options
ICC-800-SS = 8-Station ICC controller, internal transformer, stainless steel cabinet	
ICC-800-PP = 8-Station ICC controller, internal transformer, plastic pedestal	

STATION EXPANSION MODULES
ICM-400 = 4-Station plug-in module used to increase station count by 4.
ICM-800 = 8-Station plug-in module used to increase station count by 8.
Plastic cabinet = Expands to 32 stations Metal cabinet = Expands to 48 stations Stainless steel cabinet = Expands to 48 stations Plastic pedestal = Expands to 48 stations



EXAMPLES

ICC-800-M	8-Station base unit, metal cabinet
ICC-1201-PL	8-Station base unit, one ICM-400 module, international version, and plastic cabinet
ICC-1600-SS	8-Station base unit, one ICM-800 module, and stainless cabinet
ICC-2000-PL	8-Station base unit, one ICM-800 module, one ICM-400 module, and plastic cabinet
ICC-2401-PL	8-Station base unit, two ICM-800 modules, international version, and plastic cabinet
ICC-2800-PP	8-Station base unit, two ICM-800 modules, one ICM-400 module, and plastic pedestal
ICC-3200-PL	8-Station base unit, three ICM-800 modules, and plastic cabinet

EXAMPLES (METAL CABINETS)

ICC-3600-M	8-Station base unit, three ICM-800 modules, one ICM-400 module, and metal cabinet
ICC-4000-M	8-Station base unit, four ICM-800 modules, and metal cabinet
ICC-4400-M	8-Station base unit, four ICM-800 modules, one ICM-400, and metal cabinet
ICC-4800-M	8-Station base unit, five ICM-800 modules, and metal cabinet

I-CORE

APPLICATION

Commercial

NUMBER OF STATIONS

6 to 42

TYPE

Modular

THE NEXT GENERATION OF COMMERCIAL CONTROL.

FEATURES

- Number of stations: 6 to 42
- Type: Modular
- Enclosure: Outdoor
- Independent programs: 4
- Start times per program: 8 (A, B, C); 16 (D)
- Max. station run time: 12 hrs
- Warranty period: 5 years

ADVANCED FEATURES

- Easy Retrieve™ memory
- Compatible with Hunter Klik sensors and other micro-switch type weather sensors
- One touch manual start and advance for easy manual operation
- Rain sensor bypass
- Programmable rain delay
- Manual cycle
- Test program allows for quick system checks
- Quick Check™
- Non-volatile memory
- Automatic short circuit protection
- Seasonal adjustment (global): 0% to 300% (in 1% increments)
- Seasonal adjustment (monthly)
- Delay between stations (maximum): 9 hrs
- Sensor programmable by zone
- Simultaneous program operation: Any 2
- Total run time calculator
- Cycle and Soak
- No water window
- Event day off programming
- Backlit display makes it easy to program in low light applications
- Real time flow monitoring
- Factory installed SmartPort®
- Multiple language programming (6 languages)
- Remote control operation with Hunter ROAM and ICR remotes
- Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor

•• = Detailed descriptions on pages 66 and 67

ELECTRICAL SPECIFICATIONS

Transformer input: 120/240 VAC, 50/60 Hz
 Transformer output (24 VAC): 1.4 A
 Dual voltage transformer (120/240 VAC)
 Station output (24 VAC): 0.56 A
 P/MV output (24 VAC): 0.56 A

Simultaneous station operation (includes master valve): 5 valves
 Pump/master valve
 Sensor inputs: Plastic: 2; metal: 3
 Operating temperature: -18° C to 66° C

APPROVALS

CE, UL, cUL, C-tick, FCC



Plastic outdoor:
25.7 cm H x 33.7 cm W x 2.1 cm D



Powder coated metal outdoor: 16.3 cm H x 31.4 cm W x 39.4 cm D



Plastic pedestal:
97 cm H x 52 cm W x 38 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/ICORE

BASE MODELS

- IC-600-PL = 6-Station controller, indoor/outdoor, plastic cabinet
- IC-601-PL = International version, 6-Station controller, indoor/outdoor, plastic cabinet
- IC-600-M = 6-Station controller, indoor/outdoor, metal cabinet
- IC-600-PP = 6-Station controller, indoor/outdoor, plastic pedestal

STATION EXPANSION MODULES

- ICM-600 = 6-Station plug-in module used to increase station count by 6.
- Plastic cabinet = Expands to 30 stations
- Metal cabinet = Expands to 42 stations
- Plastic pedestal = Expands to 42 stations

EXAMPLES

IC-600-PL	6-Station base unit with plastic cabinet	IC-3000-PP	6-Station base unit, with plastic pedestal, and four ICM-600 modules
IC-1201-PL	6-Station base unit, with plastic cabinet, and one ICM-600 module (international version)	IC-3600-M	6-Station base unit, with metal cabinet, and five ICM-600 modules
IC-1800-PL	6-Station base unit, with plastic cabinet, and two ICM-600 modules	IC-4200-M	6-Station base unit, with metal cabinet, and six ICM-600 modules
IC-2401-PL	6-Station base unit, with plastic cabinet, and three ICM-600 modules (international version)		



I-Core's unique "bridge" modules activate the existing terminal strips.

CONTROLLERS

DUAL

APPLICATION
Commercial

NUMBER OF STATIONS
6 to 48

TYPE
Decoder


USE DUAL TO CONVERT THE I-CORE TO A CUTTING EDGE TWO-WIRE CONTROLLER.

MODULE AND DECODER FEATURES

- Decoder station sizes available: 1, 2
- Max. distance to decoder, 2 mm² (14 AWG) wire path: 1500 m; 3.3 mm² (12 AWG) wire path 2300 m
- Max. recommended distance, decoder to solenoid: 30 m
- Field programmable
 - DUAL decoder module display and push button programming makes it easy to program decoders at the controller itself
 - DUAL decoders can be field programmed with the Hunter ICD-HP. No need to remove decoders from the two-wire path
- Decoder module displays decoder operation and diagnostic information
- Can operate up to 48 stations of combined decoder and conventional control making system retrofit easy
- DUAL-S external surge protection
- Waterproof connectors for connection to two-wire path supplied with all DUAL decoders and DUAL-S surge protection
- Number of 2-wire paths: 3

APPROVALS

CE, UL, cUL, C-tick

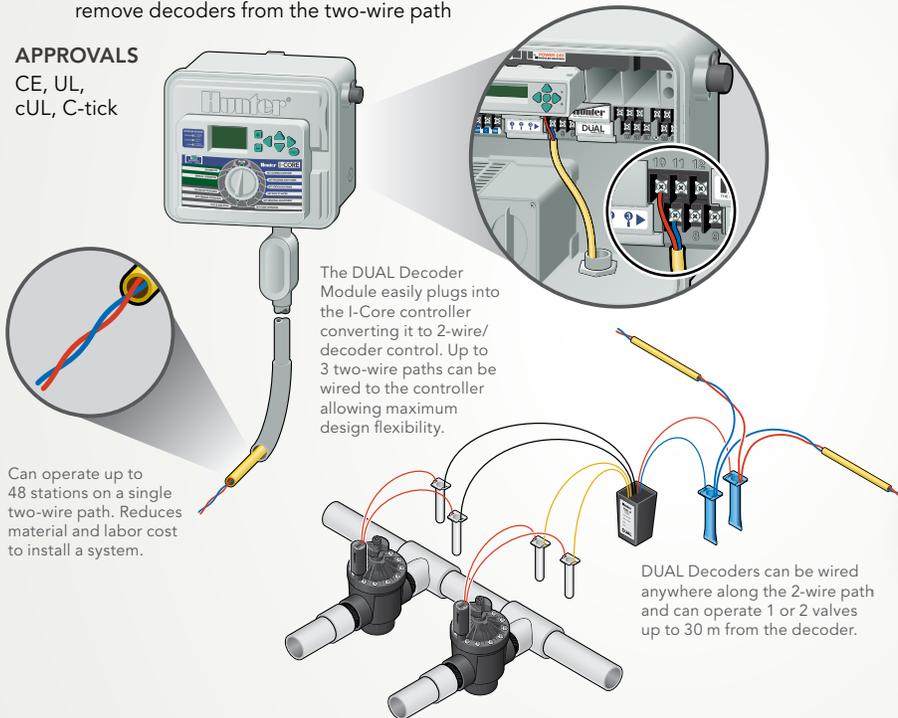

DUAL decoders and surge arrester: 7.6 cm H x 4.4 cm W x 5 cm D



DUAL decoder module: 3.5 cm H x 11.1 cm W x 10.1 cm D

CONTROLLERS

SPECIFICATIONBUILDER

www.hunterindustries.com/DUAL

BASE MODELS
IC-600-PL = 6-Station controller, indoor/outdoor, plastic cabinet
IC-601-PL = International version, 6-Station controller, indoor/outdoor, plastic cabinet
IC-600-M = 6-Station controller, indoor/outdoor, metal cabinet
IC-600-PP = 6-Station controller, indoor/outdoor, plastic pedestal

DUAL MODELS
DUAL48M = DUAL decoder output module. Plug-in module converts any ICORE controller to 2-wire decoder system (up to 48 stations maximum)
DUAL-1 = DUAL 1-station decoder (includes 2 DBRY-6 connectors)
DUAL-2 = DUAL 2-station decoder (includes 2 DBRY-6 connectors)
DUAL-S = DUAL surge arrester (includes 4 DBRY-6 connectors)

ID WIRE MODEL GUIDE			
2 MM ² (14 AWG) STANDARD DECODER CABLE (UP TO 10,000 FT./3KM)		3.3 MM ² (12 AWG) LONG RANGE, HEAVY-DUTY DECODER CABLE	
ID1GRY	Gray jacket	ID2GRY	Gray jacket
ID1PUR	Purple jacket	ID2PUR	Purple jacket
ID1YLW	Yellow jacket	ID2YLW	Yellow jacket
ID1ORG	Orange jacket	ID2ORG	Orange jacket
ID1BLU	Blue jacket	ID2BLU	Blue jacket
ID1TAN	Tan jacket	ID2TAN	Tan jacket

ACC

APPLICATION
High-End Commercial

NUMBER OF STATIONS
12 to 42

TYPE
Modular

ACC IS THE MOST POWERFUL CONTROLLER FOR LARGE, SOPHISTICATED SITES.

FEATURES

- Number of stations: 12 to 42
- Type: Modular
- Enclosure: Outdoor
- Independent programs: 6
- Start times per program: 10
- Max. station run time: 6 hrs
- Warranty period: 5 years

ADVANCED FEATURES

- Easy Retrieve™ memory
- Compatible with Hunter Klik sensors and other micro-switch type weather sensors
- One touch manual start and advance for easy manual operation
- Rain sensor bypass
- Programmable rain delay
- Manual cycle
- Flow and alarm logs
- Test program allows for quick system checks
- Quick Check™
- Non-volatile memory
- Automatic short circuit protection
- Seasonal adjustment (global): 0% to 300% (in 1% increments)
- Seasonal adjustment (by program)
- Delay between stations (maximum): 6 hrs
- Sensor programmable by program
- Two pump/master valves programmable by station
- = Detailed descriptions on pages 66 and 67
- Simultaneous program operation: 6
- Total run time calculator
- Cycle and Soak
- No water window
- Backlit display makes it easy to program in low light applications
- Real time flow monitoring
- Factory installed SmartPort®
- Central control compatible with Hunter IMMS™
- Alphanumeric names for each program, station, or group
- Simultaneous station operation (includes master valve): 14 valves
- Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor or ET system

ELECTRICAL SPECIFICATIONS

Transformer input: 120/240 VAC, 50/60 Hz
 Transformer output (24 VAC): 4.0 A
 Dual voltage transformer (120/240 VAC)
 Station output (24 VAC): 0.56 A
 P/MV output (24 VAC): 0.32 A
 Pump/master valve: 2, normally closed
 Sensor inputs: 4
 Operating temperature: -18° C to 66° C

APPROVALS

CE, UL, cUL, C-tick, FCC



Powder coated metal outdoor:
31 cm H x 39 cm W x 16 cm D



Powder coated metal pedestal:
92 cm H x 39 cm W x 13 cm D
(pedestal only)



Plastic pedestal:
97 cm H x 52 cm W x 38 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/ACC

BASE MODELS	OPTIONS USER INSTALLED
ACC-1200 = 12-Station base unit controller, expands to 42 stations, metal cabinet	(blank) = No option
ACC-1200PP = 12-Station base unit controller, expands to 42 stations, plastic pedestal	PED = Optional metal pedestal for metal cabinet models

STATION EXPANSION MODULES
ACM-600 = 6-Station plug-in module for use with the ACC-1200 series controllers
AGM-600 = 6-Station plug-in module for use with the ACC-1200 series controllers (extreme service lightning protection version)

EXAMPLES	
ACC-1200	12-Station base unit, metal cabinet
ACC-1800	12-Station base unit with one ACM-600 module, and metal cabinet
ACC-2400 - PED	12-Station base unit, two ACM-600 modules and a metal pedestal
ACC-3000	12-Station base unit with three ACM-600 modules, and metal cabinet
ACC-3600	12-Station base unit with four ACM-600 modules, and metal cabinet
ACC-4200	12-Station base unit with five ACM-600 modules, and metal cabinet



ACM-600

ACC-99D

APPLICATION
High-End Commercial

NUMBER OF STATIONS
1 to 99

TYPE
Decoder

THIS DECODER VERSION OF THE POWERFUL ACC PUTS CONTROL IN COMMAND.

Includes all features of the ACC Controller on page 74

DECODER FEATURES


- Decoder station sizes available: 1, 2, 4, 6
- Sensor decoder available
- Max. distance to decoder, 2 mm² (14 AWG) wire path: 3000 m
- Max. distance to decoder, 3.3 mm² (12 AWG) wire path: 4500 m
- Max. recommended distance, decoder to solenoid: 45 m
- Field programmable
- ICD-HP wireless handheld programmer compatible
- Two-way communications
- Surge suppression: Internal (ground wire included)
- Dual pump/master valve outputs may be assigned to decoders
- Wire path connectors included with each decoder
- Number of wire paths: 6
- Automatic daily weather-based scheduling with optional Hunter Solar Sync sensor or ET system

APPROVALS

CE, UL, cUL, C-tick, FCC



Decoders: ICD-100, 200, ICD-SEN: 92 mm H x 38 mm W x 12.7 mm D
ICD-400, 600: 92 mm H x 46 mm W x 38 mm D
Height does not include wire leads

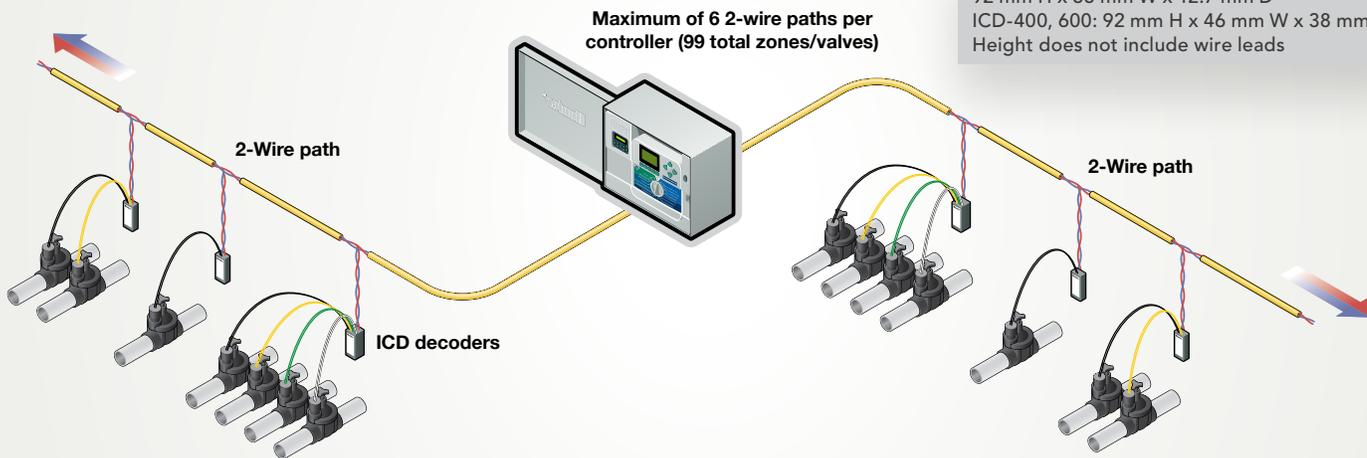

CONTROLLERS

SPECIFICATIONBUILDER

www.hunterindustries.com/ACCD

BASE MODELS		OPTIONS USER INSTALLED	IDWIRE SPECIFY SEPARATELY
ACC-99D = 2-Wire decoder controller with 99 station capacity, metal cabinet		(blank) = No option PED = Optional metal pedestal for metal cabinet models	2 MM² (14 AWG) STANDARD DECODER CABLE (UP TO 3000 M)
ACC-99DPP = 2-Wire decoder controller with 99 station capacity, plastic pedestal			ID1GRY = Gray jacket
EXAMPLES			ID1PUR = Purple jacket
ACC-99D	2-wire decoder controller, metal cabinet		ID1YLW = Yellow jacket
ACC-99D - PED	2-wire decoder controller, metal pedestal		ID1ORG = Orange jacket
ACC-99DPP	2-wire decoder controller, plastic pedestal		ID1BLU = Blue jacket
			ID1TAN = Tan jacket
DECODERS	SPECIFY SEPARATELY		3.3 MM² (12 AWG) HEAVY-DUTY DECODER CABLE (UP TO 4500 M)
ICD-100 = Single-station decoder with surge suppression and ground wire			ID2GRY = Gray jacket
ICD-200 = 2-station decoder with surge suppression and ground wire			ID2PUR = Purple jacket
ICD-400 = 4-station decoder with surge suppression and ground wire			ID2YLW = Yellow jacket
ICD-600 = 6-station decoder with surge suppression and ground wire			ID2ORG = Orange jacket
ICD-SEN = 2-input sensor decoder with surge suppression and ground wire			ID2BLU = Blue jacket
			ID2TAN = Tan jacket

Note: Each decoder includes 2 waterproof connectors for red and blue wires.

HFS

APPLICATION

Commercial

TYPE

Flow Sensor

www.hunterindustries.com/HFS

KNOW THE FLOW WITH HFS, A SIMPLE AND ECONOMICAL SOLUTION FOR METERING AND REACTING TO ACTUAL FLOW CONDITIONS.

FEATURES

- Simple two wire connection to ACC and I-Core controllers (up to 1000 ft/300 m)
- Feeds flow data (gallons or liters) to controller, for flow recording and monitoring purposes
- Robust waterproof construction (used with appropriate FCT tees for pipe diameter, see table)
- Provides station level flow monitoring for reaction to high or low flow conditions
- Prevents damage and waste from leaks and breaks in piping system



Impeller-type flow meter, requires FCT for pipe installation (sold separately)

SPECIFICATIONBUILDER

FLOW RANGE

FLOW SENSOR DIAMETER	OPERATING RANGE (LPM)		
	MINIMUM*	SUGGESTED MAXIMUM †	MAXIMUM (for sensor)
25 mm	23	64	190
40 mm	50	132	380
50 mm	76	208	760
80 mm	150	450	1140

* Minimum recommended flow for the highest flow zone for your system.

† Good design practice dictates the maximum flow not to exceed 1.5 m/s. Suggested maximum flow is based upon Class 200 IPS plastic pipe.

NOTE: Highest flow zone within irrigation system should not be more than 75% maximum available system flow.

MODELS

HFS = ACC and I-CORE compatible flow sensor

DESCRIPTION

Includes sensor only. Use with ACC and I-CORE controllers, sensor requires FCT for pipe installation (sold separately)

EXAMPLE

HFS

MODELS

SPECIFY SEPARATELY

- FCT-100 = 25 mm (1") Schedule 40 sensor receptacle tee
- FCT-150 = 40 mm (1-1/2") Schedule 40 sensor receptacle tee
- FCT-158 = 40 mm (1-1/2") Schedule 80 sensor receptacle tee
- FCT-200 = 50 mm (2") Schedule 40 sensor receptacle tee
- FCT-208 = 50 mm (2") Schedule 80 sensor receptacle tee
- FCT-300 = 80 mm (3") Schedule 40 sensor receptacle tee
- FCT-308 = 80 mm (3") Schedule 80 sensor receptacle tee
- FCT-400 = 100 mm (4") Schedule 40 sensor receptacle tee

EXAMPLE

FCT-200

ICD-HP

APPLICATION

Commercial

TYPE

Decoder Programmer

www.hunterindustries.com/ICDHP

THE INDISPENSABLE FIELD TOOL FOR THE DECODER PROFESSIONAL.

FEATURES

- Waterproof programming cup
- Communicates with decoder through plastic case—wireless electro-magnetic induction saves waterproof connectors
- Compatible with Hunter ICD or DUAL series decoders
- USB powered for shop or office use; 4 x AA batteries for field use
- All test leads and cables included in durable, foam-padded carrying case
- Turn decoder stations on and view solenoid status, current in milliamps, and more
- Program or re-program decoder stations, whether new or installed
- Program any station numbers in any order, or skip stations for future expansion
- Simplifies setup and diagnostics for sensor decoders
- Sensor test functions for Klik and Flow sensors, plus built-in multimeter
- Backlit adjustable display
- 6 international operating languages
- Warranty period: 5 years

ELECTRICAL SPECIFICATIONS

Power input: 4 x AA batteries, or standard USB connector (included)

Communications: Wireless induction, range 25 mm

Fused test leads for unpowered decoder functions

APPROVALS

FCC, CE, C-tick (no license required)



ICD-HP: Handheld programmer

SPECIFICATIONBUILDER

MODEL

ICD-HP = Handheld programmer

DESCRIPTION

Wireless handheld decoder programmer, includes all test and power leads, programming cup, and rugged carrying case

EXAMPLE

ICD-HP

ROAM

APPLICATION
Residential/Light Commercial

RANGE
300 meters

www.hunterindustries.com/ROAM

THE ROAM REMOTE ALLOWS FOR CONTROLLER OPERATION UP TO 300 METERS.

FEATURES

- Designed to work with Hunter ACC, I-Core, ICC, Pro-C, PCC and X-Core controllers through a SmartPort® connection
- 128 programmable addresses for use of multiple ROAM remotes in the same neighborhood
- Variable run times to adjust run time without modifying regular program
- Maximum stations supported: 240
- Run times: 1 to 90 minutes
- Range: Up to 300 m (line of sight)
- Transmitter power source: 4 AAA batteries (included)
- Receiver power source: 24 VAC, 10 mA (provided by controller)
- System operating frequency: 433 MHz
- FCC approved



Transmitter and receiver:
18 cm H x 5.7 cm W x 3 cm D

SmartPort®

ROAM and ICR remote controls require the installation of a SmartPort wiring harness. This consists of a connector that is wired to the SmartPort terminal on the controller and will accept either the ROAM or ICR remote receiver.



SPECIFICATIONBUILDER

MODELS

ROAM-KIT = Transmitter, receiver (SmartPort® wiring harness, and 4 AAA batteries included)
ROAM-TR = Transmitter (4 AAA batteries included)
ROAM-R = Receiver
ROAM-WH = SmartPort wiring harness (length: 1.8 m)
SRR-SCWH = Shielded SmartPort wiring harness (length: 7.6 m)

EXAMPLES

ROAM-KIT
ROAM-R

CONTROLLERS

ICR

APPLICATION
Commercial

RANGE
3 km

REMOTELY ACCESS CONTROLLERS UP TO 3 KILOMETERS AWAY.

FEATURES

- Up to 3 kilometers range for remote manual operation of Hunter irrigation systems
- Designed to work with Hunter ACC, I-Core, ICC, Pro-C, PCC and X-Core controllers through a SmartPort® connection
- 128 different programmable addresses
- Variable run times to change run time without modifying regular program
- Display shows remaining battery life
- Maximum stations supported: 240
- Run times: 1 to 90 min
- Large LCD display, push-button operation
- Rugged plastic carrying case included
- Transmitter power source: 4 AA alkaline batteries (included)
- Receiver power source: 24 VAC, from controller through a SmartPort® connector
- System operating frequency: 27 MHz band
- SmartPort can be mounted up to 15 m from controller (use SRR-SCWH shielded cable wiring harness)
- FCC approved: No FCC license required



Transmitter (no antenna):
17 cm H x 8.3 cm W x 3.2 cm D
Receiver (no antenna):
16 cm H x 7.6 cm W x 3.2 cm D

SPECIFICATIONBUILDER

MODELS

ICR-KIT = Transmitter, receiver SmartPort® wiring harness, and carrying case
ICR-TR = Handheld transmitter (4 AA batteries included)
ICR-R = Receiver unit (SmartPort wiring harness included)
ICR-CASE = Plastic carrying case
ROAM-WH = SmartPort wiring harness (length: 6 ft/1.8 m)
SRR-SCWH = Shielded SmartPort wiring harness (length: 7.6 m)

OPTIONS

(blank) = No option
A = Australia and other international markets

EXAMPLES

ICR-KIT

SVC

APPLICATION	NUMBER OF STATIONS	TYPE
Residential/Commercial	1, 2, 4	Fixed

THE SVC BRINGS BASIC, BATTERY-POWERED CONTROL TO SITES WITH NO ELECTRICITY.

FEATURES

- Battery powered
- Number of stations: 1, 2, 4
- Type: Fixed
- Enclosure: Outdoor
- Program by station
- Start times per program: 9
- Max. station run time: 4 hrs
- Warranty period: 2 years

ADVANCED FEATURES

- Compatible with Hunter Klik sensors and other micro-switch type weather sensors (wireless sensors not compatible)
- One touch manual start and advance for easy manual operation
- Programmable rain delay
- Manual cycle
- Non-volatile memory
- Low battery indicator
- Waterproof (to 3.7 m)

ELECTRICAL SPECIFICATIONS

Sensor inputs: 1
 Power source: 9-volt battery
 Operates DC latching solenoids only (P/N 458200)
 Operating temperature: -18° to 66° C

APPROVALS

IP68, CE

Various configurations



Plastic outdoor:
3.3 cm W x 12.7 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/SVC

MODELS

SVC-100 = Single station controller (DC latching solenoid included)
SVC-200 = 2-Station controller (DC latching solenoid ordered separately)
SVC-400 = 4-Station controller (DC latching solenoid ordered separately)
SVC-100-VALVE = Single station controller with PGV-101G valve and DC latching solenoid (NPT threads)
SVC-100-VALVE-B = Single station controller with PGV-101G-B valve and DC latching solenoid (BSP threads)

EXAMPLES

SVC-100
SVC-100-VALVE

WVS

APPLICATION	NUMBER OF STATIONS	TYPE
Residential/Commercial	1, 2, 4	Fixed

WVS IS A BATTERY-POWERED, WIRELESS PROGRAMMABLE CONTROLLER FOR HARD-TO-REACH PLACES.

FEATURES

- Battery powered
- Number of stations: 1, 2, 4
- Type: Fixed
- Enclosure: Outdoor
- Program by station
- Start times per program: 9
- Max. station run time: 4 hrs
- Warranty period: 2 years

ADVANCED FEATURES

- Compatible with Hunter Klik sensors and other micro-switch type weather sensors (wireless sensors not compatible)
- One touch manual start and advance for easy manual operation
- Programmable rain delay
- Manual cycle
- Non-volatile memory
- Low battery indicator
- Waterproof (to 3.7 m)
- Wireless remote programming

ELECTRICAL SPECIFICATIONS

Simultaneous station operation: Up to 4
 Sensor inputs: 1
 Power source: 9-volt battery
 Operates DC latching solenoids only (P/N 458200)
 Operating temperature: -18° to 66° C
 Frequency of operation: 900 MHz ISM band
 No FCC license required

APPROVALS

IP68, CE



WVP (left): 7.6 cm W x 29.2 cm L x 61 cm H
WVC (right): 3.3 cm W x 12.7 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/WVS

MODELS

WVC-100 = Single station wireless controller (DC latching solenoid ordered separately)
WVC-200 = 2-Station wireless controller (DC latching solenoid ordered separately)
WVC-400 = 4-Station wireless controller (DC latching solenoid ordered separately)
WVP = Wireless valve programmer to be used with wireless valve controllers

OPTIONS

(blank) = 900 MHz ISM band (US/Australia)
 E = 869.85 MHz (Europe)

EXAMPLES

WVC-100
WVP

XC HYBRID

APPLICATION
Residential/Commercial

NUMBER OF STATIONS
4, 6, 8, 10, 12

TYPE
Fixed

GET THE POWER WITHOUT THE PLUG WITH THE BATTERY-POWERED XC HYBRID.

FEATURES

- Battery or AC powered
- Number of stations: 4, 6, 8, 10, 12 (plastic); 6, 12 (stainless)
- Type: Fixed
- Enclosures: Indoor/outdoor plastic; outdoor stainless
- Independent programs: 3
- Start times per program: 4
- Max. station run time: 4 hrs
- Warranty period: 2 years

ADVANCED FEATURES

- Easy Retrieve™ memory
 - Compatible with Hunter Klik sensors and other micro-switch type weather sensors (wireless sensors not compatible)
 - One touch manual start and advance for easy manual operation
 - Rain sensor bypass
 - Programmable rain delay: 1 to 7 days
 - Manual cycle
 - Test program allows for quick system checks
 - Non-volatile memory
 - Seasonal adjustment (global): 10% to 150%
 - Delay between stations (maximum): 4 hrs
 - Sensor programmable by zone
- = Detailed descriptions on pages 66 and 67

ELECTRICAL SPECIFICATIONS

Operates DC latching solenoids only
 Pump/master valve
 Sensor inputs: 1
 Operating temperature: -18° C to 66° C
 Uses 6 AA batteries (plastic model)
 Uses 6 C batteries (stainless model)

OPTIONAL

24 VAC input transformer:
 120 VAC plug in transformer (P/N 526500)
 230/240 VAC plug in transformer (European P/N 545700)
 240 VAC plug in transformer (Australian P/N 545500)
 DC latching solenoids (P/N 458200)
 Pole mount for stainless steel model

APPROVALS

CE, UL, cUL, C-tick



Plastic indoor/outdoor:
H 22 cm H x 17.8 cm W x 9.5 cm D



Stainless steel outdoor:
25 cm H x 19 cm W x 11 cm D



Stainless steel outdoor:
25 cm H x 19 cm W x 11 cm D
Stainless steel pole: 1.2 m

CONTROLLERS

SPECIFICATIONBUILDER

www.hunterindustries.com/XCHYBRID

MODELS
XCH-400 = 4-Station indoor/outdoor controller
XCH-600 = 6-Station indoor/outdoor controller
XCH-600-SS = 6-Station outdoor controller, stainless
XCH-800 = 8-Station indoor/outdoor controller
XCH-1000 = 10-Station indoor/outdoor controller
XCH-1200 = 12-Station indoor/outdoor controller
XCH-1200-SS = 12-Station outdoor controller, stainless

EXAMPLE

XCH-400	4-Station indoor/outdoor controller
XCH-600-SS	6-Station outdoor controller, stainless

OPTIONS

SPECIFY SEPARATELY

- XCHSPOLE = Stainless steel mounting pole (1.2 m)
- XCHSPB = Stainless steel mounting bracket (required for pole)

ECO LOGIC

APPLICATION

Residential

NUMBER OF STATIONS

4, 6

TYPE

Fixed

FOR SMALL GARDENS AND LANDSCAPES, ECO LOGIC BRINGS EFFORTLESS CONTROL TO WATER EFFICIENCY.

FEATURES

- Number of stations: 4, 6
- Type: Fixed
- Enclosure: Indoor/outdoor
- Independent programs: 3 (customisable)
- Start times per program: 4 (customisable)
- Max station run time: 4 hrs
- Warranty period: 2 years

ADVANCED FEATURES

- Compatible with Hunter Klik sensors and other micro-switch type weather sensors
- Rain sensor bypass
- Programmable rain delay: 1 to 7 days
- Manual cycle
- Test program allows for quick system checks
- Quick Check™
- = Detailed descriptions on pages 66 and 67
- Non-volatile memory
- Automatic short circuit protection
- Seasonal adjustment (global): 10% to 150%
- Delay between stations (maximum): 4 hrs
- Customisable programs enable the controller to be simplified to a single program

ELECTRICAL SPECIFICATIONS

Transformer input: 230/240 VAC 50/60 Hz

Transformer output (24 VAC): 0.625 A

Station output (24 VAC): 0.56 A

P/MV output (24 VAC): 0.56 A

APPROVALS

CE, cUL



Plastic indoor:
12.6 cm H x 12.6 W x 3.2 cm D



SPECIFICATIONBUILDER

www.hunterindustries.com/ELC

MODELS	OPTIONS
ELC-401i = 4 Station indoor model	E = 230/240 VAC with European connections
ELC-601i = 6 Station indoor model	A = 230/240 VAC with Australian connections

EXAMPLES

ELC-401i - E	4-Station 230/240 VAC indoor controller, with plastic cabinet
ELC-601i - A	6-Station 230/240 VAC indoor controller, with plastic cabinet

CONTROLLERS

CENTRAL CONTROL SYSTEM

SEE THE WORLD FROM A DIFFERENT VIEW. Make that every view. With Hunter's powerful IMMS 3.0, any Site can be controlled centrally and simply. With two-way communication, flow monitoring, remote shut down, and interactive map graphics, this software leaves no system unseen.

IMMS 3.0

SITES
Up to 100

CONTROLLERS
Up to 10,000

STATIONS
Up to 990,000

IMMS IS DESIGNED FOR WIDE-AREA CENTRAL CONTROL, INCLUDING ET AND FLOW REPORTING.

FEATURES

- Windows-based programming and communications software
- Total control of each controller's functions
- Graphical user interface with customisable map-based navigation
- Flow monitoring and reporting with Hunter ACC controllers
- Alarm reporting and detailed irrigation history reports
- Wireless and hardwired communications options
- Controller sharing of communications channels to reduce communications costs

ADVANCED FEATURES

- Optional IMMS-ET provides automatic evapo-transpiration adjustment to adjust watering to local conditions
- Uses cost-effective local ET sensors, sharing ACC communications
- Point-specific ET with no monthly fees
- Full station level ET database with plant, soil, and sprinkler information
- Measures and adjusts for natural rainfall events

KEY SPECIFICATIONS

Operating system: Microsoft XP, Vista, or Windows 7, 32 or 64 bit
 Minimum RAM: 512 MB
 Minimum screen resolution: 1024 x 768
 Storage: At least 100 MB disk space

COMPATIBLE CONTROLLERS

IMMS is optimized for the Hunter ACC controller and accessories (including decoder controllers). IMMS is also compatible with Hunter model ICC and Pro-C controllers, with reduced functionality.

COMPATIBLE SENSORS

HFS: Hunter Flow Sensor for ACC controllers (one per controller). Provides flow total reporting and flow alarm monitoring with diagnostic shutdowns in real time.

Cliks: Each controller should have its own rain sensor for fast rain shutdowns. All Hunter Klik sensors are compatible with ACC and other IMMS controllers.

ET Sensor: ET Sensor platform is for use with IMMS-ET software.

ET Sensor is added to selected ACC controllers, to report local conditions. This local ET data has no additional monthly charges and can be shared through the software to create schedules for other controllers in the same micro-climate (including ICC or Pro-C controllers). Add as many ET Sensors as needed to sample all micro-climates.



Add a visual dimension to central control with background map graphics.



Track flow and other vital statistics in both charts and spreadsheets.



Station level symbols can be positioned over background images from any source.

SPECIFICATIONBUILDER

www.hunterindustries.com/IMMS

SOFTWARE		
MODELS	DESCRIPTION	NOTES
IMMS3CD	IMMS 3 graphics central control software	Custom images not included
IMMS-ET-CD	Optional ET automatic weather adjustment software (requires IMMS3CD base model)	Requires an ET Sensor at one or more ACC controller locations

IMMS 3.0

SITES
Up to 100


CONTROLLERS
Up to 10,000

STATIONS
Up to 990,000


COMMUNICATIONS COMPONENTS

ACC: Communications options are installed inside the ACC controller cabinet. No additional enclosures or power are necessary for these options.

Wall mount communications installation

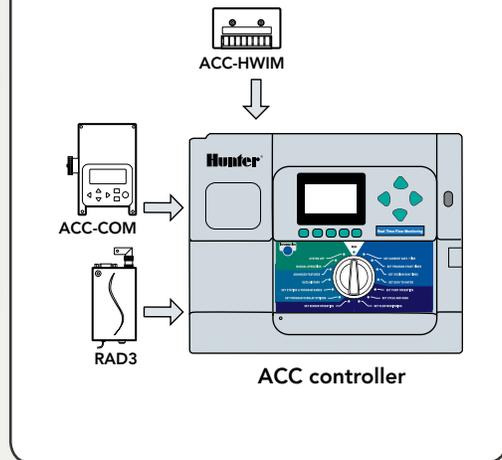

Plastic pedestal communications installation

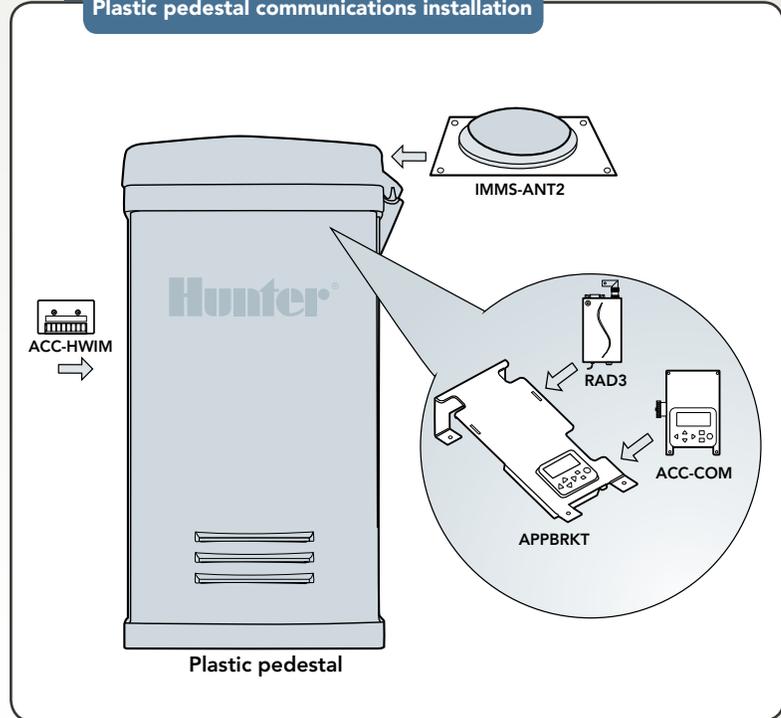

SPECIFICATIONBUILDER

www.hunterindustries.com/IMMS

COMMUNICATION OPTIONS FOR ACC INTERFACE		SPECIFY SEPARATELY
MODELS	OPTIONS	PURPOSE
ACC-COM-HWR = Hardwire/radio module	(blank) = No option	Supports hardwire and radio communication options
ACC-COM-POTS = Dial-up modem module (also supports radio and hardwire)		Supports dial-up telephone line input in addition to hardwire and radio communication sharing
ACC-COM-GSM = CSD cellular module (also supports radio and hardwire)	E = International frequencies	Supports GSM mobile input in addition to hardwire and radio communication sharing (cell service required)

EXAMPLES

ACC-COM-HWR	Hardwire/radio module
ACC-COM-POTS	Dial-up modem module
ACC-COM-GSM - E	CSD cellular module for international frequencies

USER INSTALLED OPTIONS		SPECIFY SEPARATELY
MODELS	DESCRIPTION	PURPOSE
ACC-HWIM	Hardwire interface module required for hardwire connections	Provides surge protected terminals for hardwired cable connections
RAD3	UHF radio module (North America), 450-470 MHz	UHF radio module for wireless connections (<i>license and antenna required and not included</i>)
RAD460INT	UHF radio module (International), 440-480 MHz <i>Consult factory for other international frequency ranges</i>	UHF radio module for wireless connections, international only (<i>license and antenna required and not included</i>)
APPBRKT	Communication bracket for plastic pedestals	Holds Com modules and accessories in plastic pedestal (<i>not required in wall mounts</i>)

BASE	MODELS	OPTIONS	PURPOSE	SPECIFY SEPARATELY
IMMS-CCC	Hardwire central interface	None = 120 VAC (North America) E = 230/240 VAC (Europe/international power) A = 230/240 VAC (Australia)	Hardwired central interface for connection to Site via direct wire (GCBL cable), supplied with USB cable for connection to central computer, and plug-in transformer	
GCBL*	None = up to 4000' spool 100 = 100'/30 m 300 = 300'/90 m 500 = 500'/150 m		Cable for all IMMS hardwired communications	

* GCBL available in 1000'/300 m increments (up to 4000'/1200 m)

IMMS 3.0

SITES
Up to 100

CONTROLLERS
Up to 10,000

STATIONS
Up to 990,000

SYSTEM CONFIGURATIONS (ACC CONTROLLERS)

- 1** Determine how you will reach the first controller on each Site.
 - Dial-up landline: Add ACC-COM-POTS to controller
 - Hardwire cable: Add one IMMS-CCC at the computer, and ACC-COM-HWR plus one ACC-HWIM at the controller
 - GSM cell phone: Add ACC-COM-GSM to controller
- 2** Determine how that first controller will reach the other controllers on the Site.
 - If by hardwire cable, add one ACC-HWIM (if it is not already present as in 1)
 - If by radio, add one RAD3 (US) or RAD460INT (international; consult factory for other frequency range options) plus antenna to the controller
- 3** Equip the other controllers. Add one ACC-COM-HWR to each controller, plus:
 - One ACC-HWIM when hardwire connection will be necessary
 - One RAD460INT plus antenna when radio connections are necessary


SPECIFICATIONS

ACC-COM-HWR, POTS, GSM, GSM-E
 8 cm x 11 cm x 4.5 cm
 Powered internally via data connection
 Mounted internally to ACC controller
 RAD3, RAD460INT: 450-470 MHz, 1 W,
 12.5 kHz bandwidth
 ACC-HWIM: Hardwire interface module for
 4-20 ma loop communications, includes
 8 colour-coded terminals for GCBL connection.
 Installs inside ACC controller cabinets or pedestals.

HARDWARE COMMUNICATIONS CABLE

GCBL shielded, two twisted pair 1 mm wire
 with ground wire, up to 3000 m between each device

Consult factory for detailed system design information.

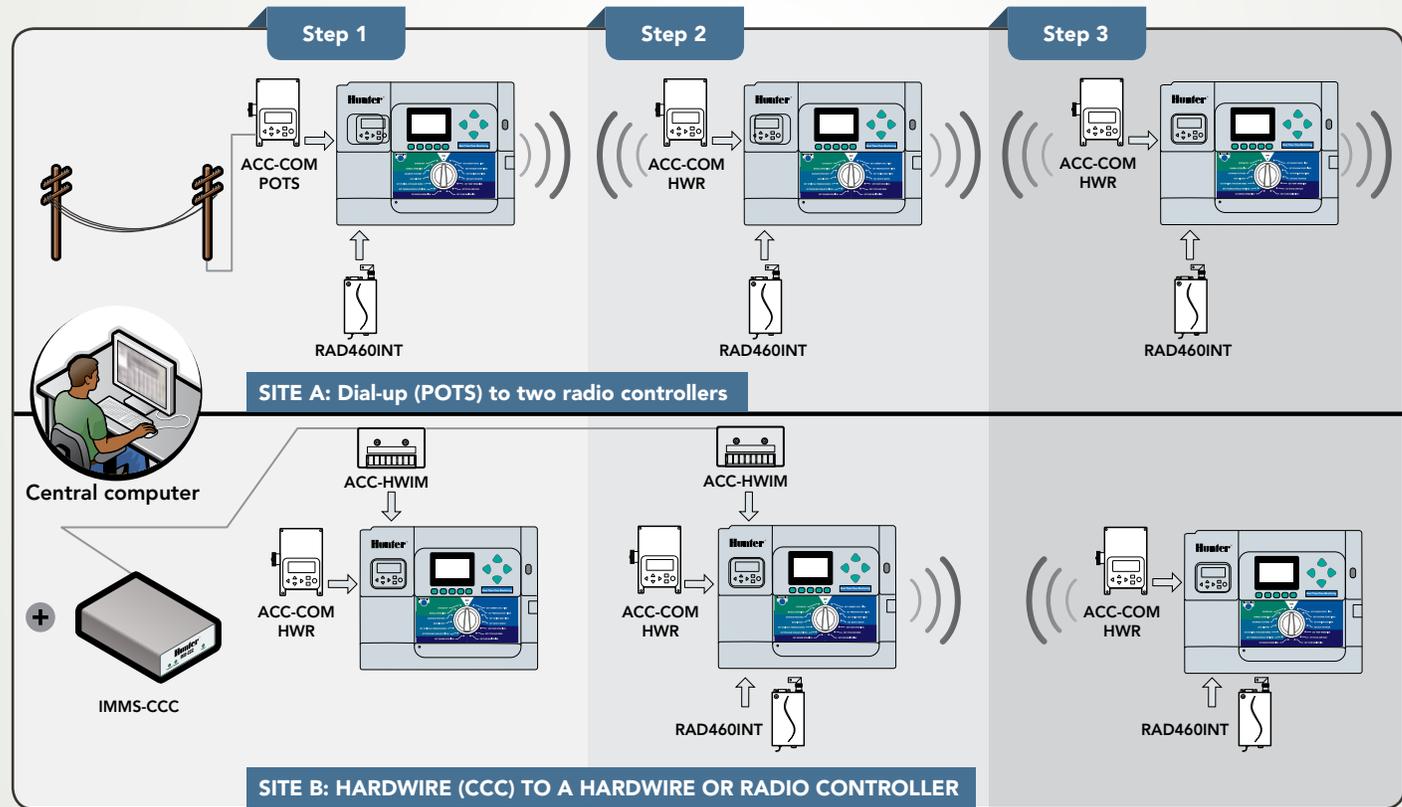

SPECIFICATIONBUILDER

www.hunterindustries.com/IMMS

RADIO ANTENNA OPTIONS		SPECIFY SEPARATELY
MODELS	DESCRIPTION	
IMMSANT2	Omni-directional antenna for plastic pedestal lid installation	
IMMSANT3	Omni-directional antenna for wall or pole mount installation	
IMMSANTYAGI3	High efficiency directional antenna for pole installation	
RA5M	High gain omni-directional mast antenna for roof or pole installations	

SENSORS



SENSORS

OUTWIT THE WEATHER. No matter what the weather forecast may say, Hunter sensors are ready for any weather at any time. The entire lineup offers a level of additional protection unmatched in the industry. **No matter rain, ice, wind, or sun, a Hunter sensor is ready for it all.**

MINI-CLI[®]

www.hunterindustries.com/MINICLIK

MINI-CLI IS THE SIMPLEST WAY TO SHUT DOWN SYSTEMS DURING RAINFALL.

FEATURES

- Easily installs on any automatic irrigation system
- Debris tolerant for reliable operation and no unnecessary shutdowns
- Can be set to shut system off from 3 mm to 25 mm of rainfall
- Includes 7.6 m of 0.8 mm sheathed, two-conductor, UL-approved wire
- Optional user-installed metal gutter mount for Mini-Click[®] (order SGM)
- Warranty period: 5 years


Note: Not intended for agricultural applications.

SPECIFICATIONS

Switch rating: 24 VAC, 5 A

Wiring: Typically interrupts the common ground wire between the solenoid valves and the controller

UL listed

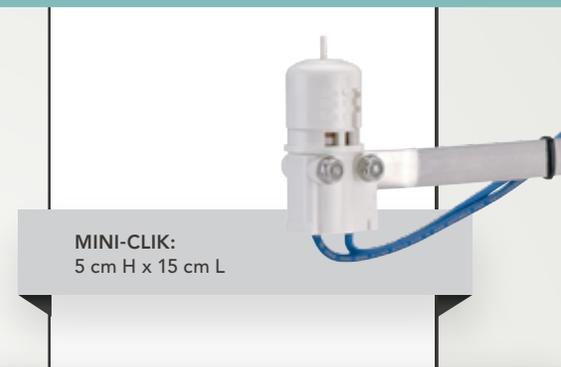

SPECIFICATIONBUILDER

MODEL	OPTIONS
MINI-CLI	(blank) = No option HV = High voltage model for 110/220 VAC applications C = Conduit mount NO = Normally open switch

USER INSTALLED OPTION SPECIFY SEPARATELY

SGM = Optional gutter mount

EXAMPLES

MINI-CLI	Mini-Click rain sensor
MINI-CLI - C	Mini-Click rain sensor with conduit mount

FREEZE-CLI[®]

www.hunterindustries.com/FREEZECLICK

WHEN FRIGID TEMPS SET IN, FREEZE-CLI STOPS SPRINKLERS TO AVOID DANGEROUS, ICY CONDITIONS.

FEATURES

- Installs easily with no adjustment needed
- Accurate temperature sensing shuts system off when air temperature reaches 3° C (37° F)
- Used with other sensors to enhance overall efficiency of irrigation systems.
- Warranty period: 5 years

Note: Not intended for agricultural applications.

SPECIFICATIONS

Switch rating: 24 VAC, 5 A

Wiring: Typically interrupts the common ground wire between the solenoid valves and the controller

UL listed



SPECIFICATIONBUILDER

MODEL	OPTIONS
FREEZE-CLI	(blank) = No option REV = Reverse switching

EXAMPLE

FREEZE-CLI

WIND-CLI[®]

www.hunterindustries.com/WINDCLI

WHEN HIGH WINDS KICK IN, WIND-CLI[®] SHUTS SYSTEMS DOWN.

FEATURES

- Adjusts to activate at various wind speeds
- Two types of operation: "normally open" or "normally closed" wiring
- Adjustable reset wind speeds
- Can control fountain systems to eliminate overspray in windy conditions
- Warranty period: 5 years

SPECIFICATIONS

Switch rating: 24 VAC, 5 A maximum

Wind speed adjustment:

Actuation speed: 19 to 56 km/h

Reset speed: 13 to 39 km/h

Mounts: Slip fits over 50 mm PVC pipe or attaches to 1 cm conduit with adapter (supplied with unit)



WIND-CLI: 9.9 cm H
Wind vane diameter: 13 cm

SPECIFICATIONBUILDER

MODEL

WIND-CLI = Wind sensor

EXAMPLE

WIND-CLI



SENSORS

MINI WEATHER STATION

www.hunterindustries.com/MWS

MWS HELPS ANY SYSTEM BATTLE WIND, RAIN, AND FREEZING TEMPERATURES.

FEATURES

- Compact sensor that monitors wind, rain, freezing temperatures, and shuts the irrigation system off as weather conditions require
- Installs easily on automatic irrigation system
- Set wind speed shutdown from 19 to 56 km/h
- Set rain shutdown from 3 mm to 25 mm of rainfall
- Automatically shuts off system when temperatures fall below 3° C
- Warranty period: 5 years

SPECIFICATIONS

Electrical rating: 24 VAC, 5 A maximum

Wind vane diameter: 12 cm

Wind speed adjustments:

Actuation speed: 19 to 56 km/h

Reset speed: 13 to 39 km/h

Freeze-Clik[®] temperature set point: 3° C +/- 2° C

Mounts: Slip fits over 55 mm PVC pipe or attaches to 1 cm conduit with adapter (supplied with unit)



SPECIFICATIONBUILDER

MODEL

MWS = Wind and rain sensors

OPTIONS

(blank) = No option
FR = Combines wind, rain and freeze sensors

EXAMPLE

MWS - FR Wind and rain sensors with a freeze sensor added

RAIN-CLIK™

RAIN-CLIK'S QUICK RESPONSE™ TURNS OFF SYSTEMS THE INSTANT RAIN STARTS TO FALL.

FEATURES

Models: Rain-Clik, Rain/Freeze-Clik, Wireless Rain-Clik, Wireless Rain/Freeze-Clik

- Quick Response™ feature shuts the system off as soon as it starts raining
- Maintenance-free design with 10-year battery life
- Adjustable vent ring allows for setting of reset delay
- Rugged polycarbonate housing and metal extension arm
- Rain-Clik includes 7.6 m of 0.8 mm sheathed, two-conductor, UL-approved wire
- Wire-free operation allows easy installation on new or existing systems
- Sensor operates up to 244 m from receiver unit
- Built-in bypass switch on receiver panel
- Wireless Rain/Freeze-Clik sensor protects against ice caused by irrigation on landscapes, roads, and walkways
- Compatible with most controllers
- Warranty period: 5 years


SPECIFICATIONS

- Wiring: normally closed or normally open
- Time to turn off irrigation system: 2 to 5 minutes approx. for Quick Response
- Time to reset Quick Response: 4 hours approx. under dry, sunny conditions
- Time to reset when fully wet: 3 days approx. under dry, sunny conditions
- Operating temperature: 0° C to 54° C (32° F to 130° F)
- UL listed, CUL (CSA), CE
- Optional user installed gutter mount for Rain-Clik (order SGM)
- Freeze sensor shuts system off when temperatures fall below 3° C (Rain/Freeze-Clik model)
- Switch rating: 24 VAC, 3 A
- System operating frequency: 433 MHz
- UL listed, FCC approved, suitable for use in Australia, CUL (CSA), CE
- Communication range up to 240 m line of sight*
- Wireless Rain/Freeze-Clik shuts system off when temperatures fall below 3° C
- Receiver input power: 24 VAC (from controller)

- = Applicable to Rain-Clik only
- ☁ = Applicable to Wireless Rain-Clik only
- = Applicable to Rain-Clik and Wireless Rain-Clik

* Consult with factory for compatibility in non-USA markets.

APPROVAL
FCC

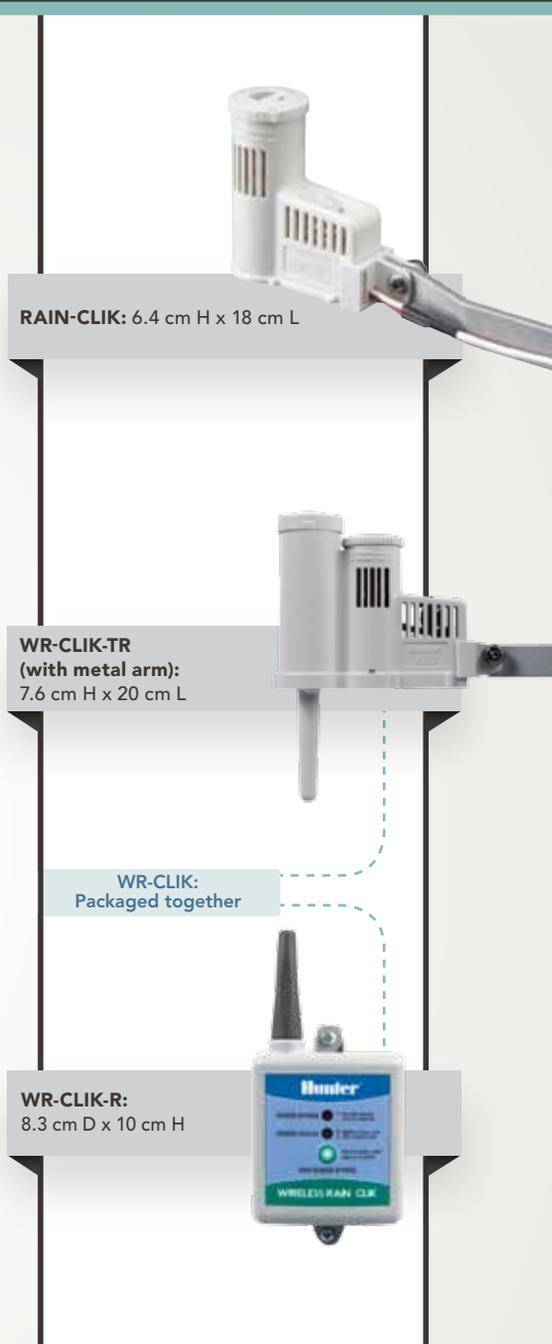

SPECIFICATIONBUILDER

www.hunterindustries.com/RAINCLIK

MODEL	OPTIONS
RAIN-CLIK = Rain-Clik sensor	(blank) = No option NO = Normally open switch
RFC = Rain/Freeze-Clik sensor	

MODELS
WR-CLIK = Wireless Rain-Clik system
WRF-CLIK = Wireless Rain/Freeze-Clik system

USER INSTALLED OPTION	SPECIFY SEPARATELY
SGM = Optional gutter mount	

USER INSTALLED OPTION	SPECIFY SEPARATELY
SGM = Optional gutter mount (included in the WRF-CLIK)	

EXAMPLES

RAIN-CLIK	Rain-Clik sensor
RFC - NO	Rain/Freeze Clik sensor with normally open switch

EXAMPLES

WR-CLIK	Wireless Rain-Clik system
WRF-CLIK	Wireless Rain/Freeze-Clik system with gutter mount

SENSORS

FLOW-CLIK™

www.hunterindustries.com/FLOWCLIK

WHEN RUPTURES OR LEAKS OCCUR, FLOW-CLIK ENSURES WATER FLOW IS STOPPED IMMEDIATELY.

FEATURES

- Automatically shuts down system if an overflow condition occurs
- Calibration for precise system control: Single button allows each system to be programmed at a specified flow level
- Protects from flooding damage and erosion
- Multi-colour LED provides system status to display when power is applied, and indicate if flow is within limits
- Compatible with all commercial and residential piping systems: Large flow range provides complete flexibility
- Works with all Hunter and most non-Hunter controllers
- Warranty period: 5 years



FLOW-CLIK INTERFACE PANEL

90 cm leads provided for easy wiring to controller (2 wires to controller 24 VAC terminals and 2 wires to sensor and terminals)
Current draw: 24 VAC, 0.025 A
Switching current: 2 A maximum
Max. distance between interface panel and sensor: 300 m (1 mm minimum wire size); 2 wires required for Flow-Clik sensor, 4 wires required for Flow-Clik IMMS™ sensor

Programmable start up delay: 0 to 300 seconds

Programmable interrupt period: 2 to 60 minutes

System status indicator light

One button system calibration to set to highest flow zone

SPECIFICATIONBUILDER

MODELS	DESCRIPTION	MODELS	SPECIFY SEPARATELY
FLOW-CLIK = Standard kit for all 24 VAC controllers	Includes sensor and interface panel, sensor requires FCT for pipe installation (sold separately)	FCT-100 = 25 mm (1") Schedule 40 sensor receptacle tee	
FLOW-CLIK-IMMS = IMMS SI/CI only compatible flow sensor	Includes sensor only. Use with IMMS SI/CI only, sensor requires FCT for pipe installation (sold separately)	FCT-150 = 40 mm (1-1/2") Schedule 40 sensor receptacle tee	
		FCT-158 = 40 mm (1-1/2") Schedule 80 sensor receptacle tee	
		FCT-200 = 50 mm (2") Schedule 40 sensor receptacle tee	
		FCT-208 = 50 mm (2") Schedule 80 sensor receptacle tee	
		FCT-300 = 80 mm (3") Schedule 40 sensor receptacle tee	
		FCT-308 = 80 mm (3") Schedule 80 sensor receptacle tee	
		FCT-400 = 100 mm (4") Schedule 40 sensor receptacle tee	

EXAMPLE

FLOW-CLIK

EXAMPLE

FCT-200

FLOW RANGE

FLOW SENSOR DIAMETER	OPERATING RANGE (LPM)		
	MINIMUM*	SUGGESTED MAXIMUM†	MAXIMUM (for sensor)
25 mm (1")	23	64	190
40 mm (1-1/2")	50	132	380
50 mm (2")	76	208	760
80 mm (3")	150	450	1140

* Minimum recommended flow for the highest flow zone for your system.
† Good design practice dictates the maximum flow not to exceed 1.5 m/sec. Suggested maximum flow is based upon Class 200 IPS plastic pipe.
NOTE: Highest flow zone within irrigation system should not be more than 75% maximum available system flow.

PUMP START RELAY

www.hunterindustries.com/PSR

FOR SYSTEMS THAT USE A PUMP, PSR DELIVERS RELIABILITY FOR LESS.



Compact design: Enclosure measures 17 cm H x 19 cm W x 12 cm D

FEATURES

- Choice of three models sized accordingly to fit your particular application
- NEMA 3R rated locking plastic enclosure rated for outdoor use, weather resistance and security
- 24 VAC flying leads make it quick and easy to wire to controller
- The PSR-22 meets demanding electrical requirements for UL approval, and the PSR-52/-53 contain UL-approved relays

Electrical Specifications

Models	Single Phase		3 Phase	Max. Full Load AMPS	Max. Resistive AMPS	Coll VA		Coll VA	
	kW at 110 VAC	kW at 240 VAC	kW at 240 VAC			Inrush	(Amps)	Holding	(Amps)
PSR-22	1.5*	3.7*	N/A	22	22	31	(1.29)	7	(0.29)
PSR-52	3.7	5.6	N/A	40	50	56	(2.33)	6	(0.25)
PSR-53	3.7	5.6	7.5	40	50	56	(2.33)	6	(0.25)

* Approximate power

SOLAR SYNC

SOLAR SYNC MONITORS LOCAL WEATHER AND ADJUSTS IRRIGATION RUNTIMES, MAKING HUNTER CONTROLLERS SMARTER.

FEATURES

- Provides automated daily adjustment to program run times
- Rain and freeze shutoff
- Wired and wireless models available
- Gutter mount bracket included
- No Water Window programming available in most controllers (see page 67)
- Warranty period: 5 years

ELECTRICAL SPECIFICATIONS

- Maximum distance sensor to module: 60 m
- 12 m of wire included in kit
- Solar Sync KIT compatible with Pro-C, PCC, ICC, I-Core controllers
- Solar Sync SEN compatible with X-Core and ACC controllers
- Rain and Freeze sensor shutdown capability included in sensor
- ☺ Wireless sensor and receiver with 240 m maximum range
- ☺ Wireless Solar Sync compatible with Pro-C, PCC, ICC, I-Core controllers
- ☺ Wireless Solar Sync SEN compatible with X-Core and ACC controllers
- = *Applicable to Solar Sync only*
- ☺ = *Applicable to wireless Solar Sync only*
- = *Applicable to Solar Sync and wireless Solar Sync*

APPROVAL
FCC

Solar Sync sensor with mounting arm: 7.6 cm H x 22 cm W x 2.5 cm D

SOLAR SYNC:
Packaged together

Solar Sync module: 4.4 cm H x 13 cm W x 1.9 cm D

WSS: Packaged with the module, sensor and receiver

Wireless Solar Sync sensor with mounting arm: 11 cm H x 22 cm W x 2.5 cm D

WSS-SEN:
Packaged together

Wireless Solar Sync receiver: 14 cm H x 3.8 cm W x 3.8 cm D

SPECIFICATIONBUILDER

www.hunterindustries.com/SOLARSYNC

MODELS

SOLAR SYNC = Solar Sync sensor (includes 12 m of wire*)
Solar Sync module (includes 10 year lithium battery and rubber module cover)

For use with PCC, Pro-C, I-Core, and ICC controllers

SOLAR SYNC-SEN† = Solar Sync sensor only

* Max. distance from sensor to controller: 12 m

† For use with X-Core and ACC controllers

EXAMPLES

SOLAR SYNC

SOLAR SYNC-SEN

MODELS

WSS = Wireless Solar Sync (240 m communication range*)
Solar Sync module (includes 10 year lithium battery and rubber module cover)

For use with PCC, Pro-C, I-Core, and ICC controllers

WSS-SEN† = Wireless Solar Sync sensor only (240 m communication range*)

* Max. distance from wireless sensor to receiver: 240 m

† For use with X-Core and ACC controllers

EXAMPLES

WSS

WSS-SEN

ET SYSTEM


FOR ADVANCED CONTROL, THE ET SYSTEM AUTOMATICALLY CREATES AN IRRIGATION PROGRAM DAILY BY MEASURING EVAPOTRANSPIRATION RATES.

FEATURES

- Calculates evapotranspiration (ET) for individual microclimate to fit the exact landscape requirements
- Specific irrigation scheduling for every zone based on the characteristics of each
- Enables compliance with local watering restrictions
- Non-volatile memory
- Full range of scheduling options
- Easily upgrades Hunter SRC, PCC, Pro-C, and ICC to weather-based controllers
- Includes 30 m of 1 mm AWG, 2-conductor for sensor installation
- WiltGard technology triggers protective watering when extreme conditions threaten plants
- Warranty period: 2 years

SPECIFICATIONS

Station maximum: 48
 Power input: 24 VAC, 50/60 Hz (from host controller)
 Current draw: 20 mA, maximum
 Max. distance, ET Sensor from module: 30 m of wire included

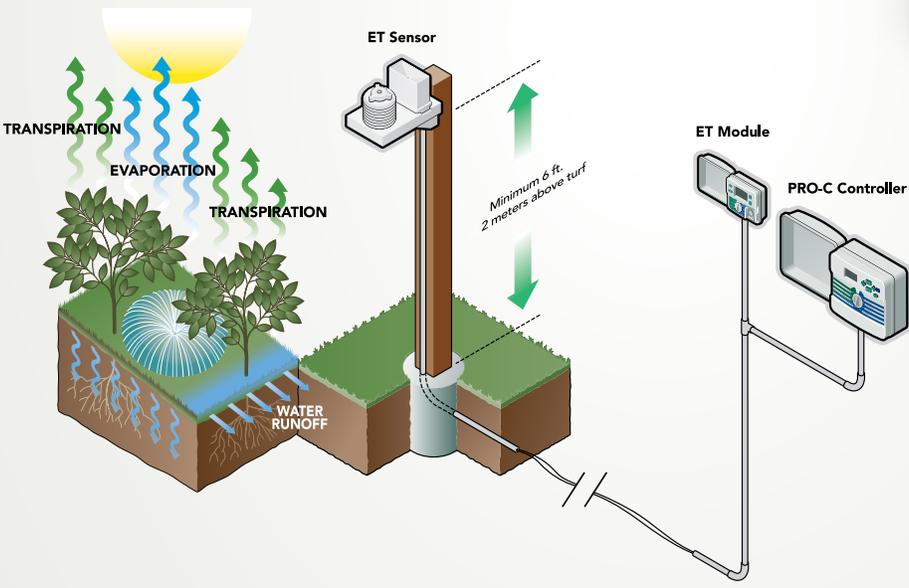

Dimensions

- ET Sensor with pole brackets:** 26.7 mm H x 18.4 mm W x 33.0 mm D
- ET Sensor with ET Wind:** 29.2 mm H x 18.4 mm W x 50.5 mm D
- ET Sensor and ET Wind with pole brackets:** 29.2 mm H x 18.4 mm W x 52.7 mm D

SPECIFICATIONBUILDER

www.hunterindustries.com/ETSYSTEM

MODELS SPECIFY SEPARATELY FROM CONTROLLER

ET SYSTEM = ET Sensor with outdoor interface ET Module, for direct connection to Hunter SRC, PCC, Pro-C, ICC controllers

ET WIND = Optional anemometer to gather wind speed data

ET SENSOR = ET Sensor only for use with IMMS-ET installations

EXAMPLE

ET SYSTEM



DRIP/MICRO

IRRIGATION'S SECRET WEAPON. Flowerbeds, highway medians, and groundcovers all benefit from the targeted accuracy of micro-irrigation, which puts water only where it is needed, with greatly reduced risk of runoff and waste.

PLD

APPLICATION
Residential/Commercial

FLOW RATES
1.35, 2.35, 3.75 l/hr

SPECIFIC AND PRECISE, PLD DELIVERS WATER WITHOUT THE WASTE.

PLD FEATURES

- In-line pressure-compensating emitters provide consistent high-quality performance
- Built-in check valve prevents emitter clogging and wasteful runoff
- Available emitter spacing of 30.5 cm, 45.7 cm, or 61 cm
- Emitter flow rates available in 1.35, 2.35, 3.75 l/hr
- Blank tubing available (no emitters)
- Comes in 76 m and 305 m coils
- Superior flexibility and kink resistance
- Works with Drip Zone Control Kits
- 30.5 m Available in PLD 0612100, PLD 1012100, and PLD 1018100

PLD FITTINGS FEATURES

- Ideal for use with all PLD drip line products
- Quick and easy connections without using tools or glue
- Handles pressures up to 3.4 bar; 340 kPa
- UV resistant
- Same colour as original PLD drip line for a perfect blend under mulch

OPERATING SPECIFICATIONS

Pressure compensating, non-draining emitters
Operating pressure range: 1.0 to 3.5 bar;
100 to 350 kPa


Recommended filtration: 120 Mesh
Accepts 17 mm insert fittings



PLD tubing/
reclaimed tubing
available




PLD-050 fitting:
1/2" MPT x 17 mm barb

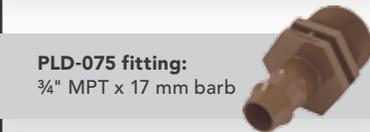

PLD-075 fitting:
3/4" MPT x 17 mm barb




PLD-CPL fitting:
17 mm Barb x barb coupling

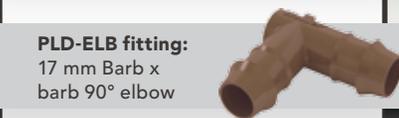

PLD-ELB fitting:
17 mm Barb x
barb 90° elbow



PLD-TEE fitting:
17 mm Barb x barb tee

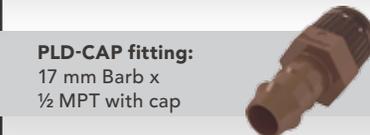

PLD-CAP fitting:
17 mm Barb x
1/2" MPT with cap



PLD-BV fitting:
17 mm Barb x
barb shut-off valve



PLD075BTTEE:
17 mm Barb tee x
3/4" female thread



PLD-AVR:
1/2" Threaded air/vacuum
relief valve

PLD Maximum Line Length Chart – 1.35 LPH

Pressure (Bar)	Emitter Spacing		
	30.5 cm	45.7 cm	61 cm
1	105	145	181
1.4	146	201	251
1.8	155	214	268
2.2	171	236	296
2.6	185	255	320
3	197	272	341

PLD Maximum Line Length Chart – 2.35 LPH

Pressure (Bar)	Emitter Spacing		
	30.5 cm	45.7 cm	61 cm
1	58	79	99
1.4	85	117	146
1.8	101	140	175
2.2	113	158	197
2.6	124	172	215
3	133	184	232

PLD Maximum Line Length Chart – 3.75 LPH

Pressure (Bar)	Emitter Spacing		
	30.5 cm	45.7 cm	61 cm
1	43	59	73
1.4	62	86	108
1.8	74	103	130
2.2	84	116	146
2.6	91	127	159
3	98	136	171

* Maximum single lateral length at 0% slope

PLD Insert Fittings

Model	Description
PLD050	Barb to 13 mm (1/2") Male Adapter
PLD075	Barb to 19 mm (3/4") Male Adapter
PLDCPL	Barb to Barb Coupling
PLDELB	Barb to Barb, 90° Elbow
PLDTEE	Barbed Tee
PLDCAP	Barb to End Cap
PLDBV	Barbed Valve
PLD075BTTEE	3/4" Female Thread x 17 mm Barb Tee
PLD-AVR	Air Relief Valve

Quick Reference Chart – LPM per 100 m

Emitter (LPH)	Emitter Spacing		
	31 cm	46 cm	61 cm
1.35	44	30	19
2.35	77	51	34
3.75	123	82	54

Additional charts located on page 110

SPECIFICATIONBUILDER

www.hunterindustries.com/PLD

MODELS	SPACING	LENGTH	OPTIONS
PLD-04 = 1.5 LPH flow	12 = 30 cm 18 = 45 cm 24 = 60 cm	100 = 30 m 250 = 75 m 1K = 300 m	(blank) = No option R = Reclaimed
PLD-06 = 2.3 LPH flow			
PLD-10 = 3.8 LPH flow			
PLD-BLNK = Blank			

EXAMPLES

PLD-04 - 12 - 250	1.5 LPH landscape dripline with 30 cm (12") spacing in a 75 m (250') roll
PLD-06 - 12 - 100	2.3 LPH landscape dripline with 30 cm (12") spacing in a 30 m (100') roll
PLD-10 - 24 - 250 - R	3.8 LPH landscape dripline with 60 cm (24") spacing in a 75 m (250') roll, with reclaimed option
PLD-BLNK - 100	30 m (100') Roll of blank tubing

MICRO IRRIGATION

APPLICATION

Residential/Commercial

USES

Precise Area Watering

MICRO IRRIGATION WATERS WITH PINPOINT ACCURACY.

SOLO-DRIP

- Eight streams of water for accurate watering
- Fingertip cap control for flow and radius adjustment
- Operating specifications: 1 to 2.5 bar (100 to 250 kPa)
- Dimensions:
 - A: SD-T – 2.41 cm H x 1.98 cm W x 1.60 cm D
 - B: SD-B – 2.41 cm H x 1.98 cm W x 1.60 cm D
 - C: SD-B-STK – 15.2 cm H x 4.32 cm W x 1.60 cm D



Solo-Drip

HALO-SPRAY

- Large diameter, umbrella of water
- Adjust radius as needed
- Combine several for a “blanket” of water
- Operating specifications: 1 to 2.5 bar (100 to 250 kPa)
- Dimensions:
 - A: HS-T – 2.41 cm H x 1.98 cm W x 1.60 cm D
 - B: HS-B – 2.41 cm H x 1.98 cm W x 1.60 cm D
 - C: HS-B-STK – 15.2 cm H x 4.32 cm W x 1.60 cm D



Halo-Spray

TRIO-SPRAY

- Full-, half-, and quarter-circle configurations
- Functions like big sprays on a micro level
- Control knob for specific adjustment
- Operating specifications: 0.7 to 2.5 bar; 70 to 250 kPa
- Dimensions:
 - A: TS-F – 3.81 cm H x 2.29 cm W x 1.52 cm D
 - B: TS-H – 3.81 cm H x 2.29 cm W x 1.52 cm D
 - C: TS-Q – 3.81 cm H x 2.29 cm W x 1.52 cm D



Trio-Spray

Solo-Drip Performance Data – Metric

	Pressure (Bar)	Flow (l/hr)	Diameter of Throw (m)
Adjustable to	1	0-40	0-0.5
Maximum	1.5	0-50	0-0.6
(approx 20 clicks)	2	0-60	0-0.8

Halo-Spray Performance Data – Metric

	Pressure (Bar)	Flow (l/hr)	Diameter of Throw (m)
Adjustable to	1	0-52	0-1.7
Maximum	1.5	0-65	0-2.8
(approx 14 clicks)	2	0-74	0-3.4

Trio-Spray Performance Data – Metric

Pressure (Bar)	Flow (l/hr)	SPRAY PATTERN		
		Diameter of Throw (m)	Radius of Throw (m)	
			360° X 18 Hole	180°
0.5	0-54	0-5.0	0-2.0	0-1.5
1	0-77	0-5.8	0-2.5	0-2.1
1.5	0-94	0-6.4	0-2.9	0-2.6
2	0-105	0-7.0	0-3.2	0-3.0
2.5	0-119	0-7.5	0-3.5	0-3.3

SPECIFICATIONBUILDER

www.hunterindustries.com/MICRO

MODELS	OPTIONS
SD = Solo-Drip	T = 10-32 Threads, 360° B = Barb, 360° B-STK = Barb with stake, 360°
HS = Halo-Spray	T = 10-32 Threads, 360° B = Barb, 360° B-STK = Barb with stake, 360°
TS = Trio-Spray	T-F = 10-32 Threads, 360° T-H = 10-32 Threads, 180° T-Q = 10-32 Threads, 90°

EXAMPLES

SD - T	Solo-Drip with 10-32 threads, 360°
HS - B	Halo-Spray with barb, 360°
TS - T-F	Trio-Spray with 10-32 threads, 360°

DRIP ZONE CONTROL KITS

APPLICATION

Residential/Commercial Micro Irrigation

DRIP CONTROL KITS BRING TOGETHER A VALVE, FILTER, AND PRESSURE REGULATOR FOR TOTAL COMMAND OF A ZONE.

FEATURES

- Factory-assembled and water-tested
- Highest quality components (SS filter screen, standard flush cap, top of the line regulator)
- Filter Sentry™ diaphragm screen cleaning system on ICZ kits
- Wide flow range to cover most micro irrigation applications

OPERATING SPECIFICATIONS

ACZ-075:

Pressure regulation: 1.7 or 2.8 bar;
170 to 280 kPa

Flow: 1.9 to 56 l/min

Operating pressure: 1.4 to 8 bar;
140 to 800 kPa

Operating temperature: up to 66° C

PCZ-101:

Pressure regulation: 1.7 or 2.8 bar;
170 to 280 kPa

Flow: 1.9 to 56 l/min

Operating pressure: 1.4 to 8 bar;
140 to 800 kPa

Operating temperature: up to 66° C

ICZ-101:

Pressure regulation: 1.7 or 2.8 bar;
170 to 280

Flow: 2.5 to 75 l/min

Operating pressure: 1.4 to 8 bar;
140 to 800 kPa

Operating temperature: up to 66° C

ICZ-151:

Pressure regulation: 2.8 bar; 280 kPa

Flow: 75 to 227 l/min

Operating pressure: 1.4 to 8 bar;
140 to 800 kPa

Operating temperature: up to 66° C

SOLENOID OPERATING SPECIFICATIONS

Heavy-duty solenoid: 24 VAC, 370 mA inrush current, 190 mA holding current, 60 cycles, 475 mA inrush current, 230 mA holding current, 50 cycles

FACTORY INSTALLED OPTIONS

1.7 or 2.8 bar regulator (ACZ-075, PCZ-101, ICZ-101)

USER INSTALLED OPTIONS

Reclaimed water ID for ACZ-075 and PCZ-101 (P/N 269205)

Reclaimed water ID for ICZ-101 (P/N 561205)

Additional charts located on page 111



SPECIFICATIONBUILDER


www.hunterindustries.com/DRIPKITS

MODELS	OPTIONS
ACZ-075 = 19 mm (¾") PGV-ASV valve with 19 mm (¾") HY075 filter system	25 = 1.7 bar (25 PSI) regulator (excluding ICZ-151) 40 = 2.8 bar (40 PSI) regulator
PCZ-101 = 25 mm (1") PGV globe valve with 25 mm (1") HY100 filter system	
ICZ-101 = 25 mm (1") ICV globe valve with 25 mm (1") HY100 filter system	
ICZ-151 = 32 mm (1½") ICV globe valve with 25 mm (1") HY100 filter system	

EXAMPLES

ACZ-075 - 25	19 mm (¾") PGV-ASV valve with ¾" HY075 filter system, and 1.7 bar (25 PSI) regulator
PCZ-101 - 25	25 mm (1") PGV globe valve with 1" HY100 filter system, and 1.7 bar (25 PSI) regulator
ICZ-101 - 40	25 mm (1") ICV globe valve with 1" HY100 filter system, and 2.8 bar (40 PSI) regulator

DESIGN ILLUSTRATION

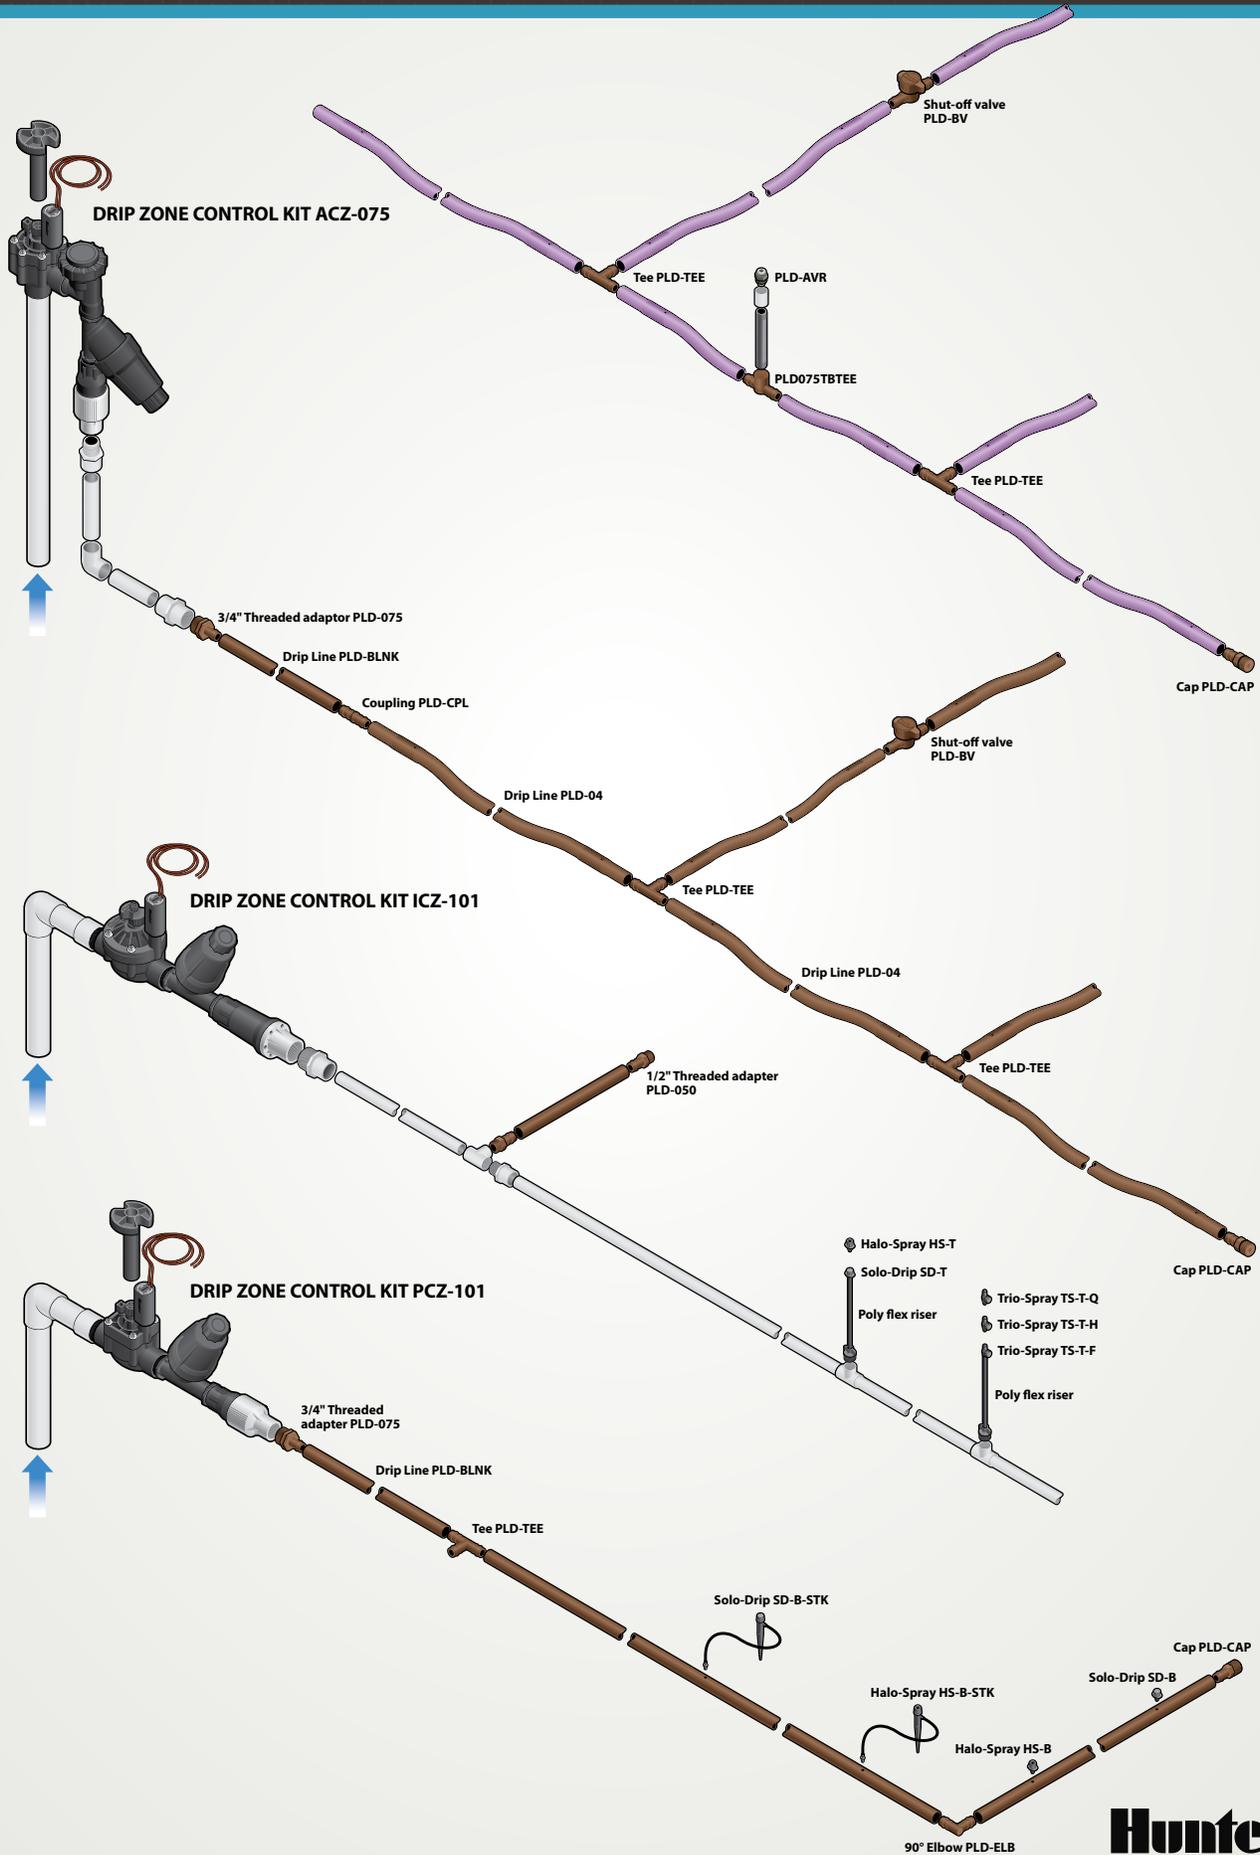

ROOT ZONE WATERING SYSTEM

APPLICATION
Residential/Commercial
Shrub and Tree Irrigation

SIZES
25, 45,
90 cm

FLOW RATES
0.95 l/min or
1.9 l/min

**FOR HEALTHIER TREES AND SHRUBS,
GET TO THE ROOT OF THINGS.**

STANDARD FEATURES

- Built in Hunter Swing Joint for direct installation to ½" PVC fitting
- Patented StrataRoot baffles divert water to root zone while adding strength to the unit
- Locking cap

DIMENSIONS

0.25 m (10"): 5.1 cm diameter x 25 cm length
 0.46 m (18"): 7.6 cm diameter x 46 cm length
 0.9 m (36"): 7.6 cm diameter x 90 cm length

OPERATING SPECIFICATIONS

Bubbler Flow Rates: 0.95 l/min or 1.9 l/min
 Recommended pressure range: 1.0 to 4.8 bar;
 100 to 480 kPa

FACTORY INSTALLED OPTIONS


Check valve
 Locking reclaimed purple cap

USER INSTALLED OPTIONS

Sleeve: Fabric sleeve that helps prevent soil intrusion in sandy soils (P/N RZWS-SLEEVE)
 Replacement cap for 0.46 m and 0.9 m only (P/N RZWS-CAP)
 Locking reclaimed purple cap 0.46 m and 0.9 m only (P/N RZWS-RCCAP)



Standard and reclaimed models available

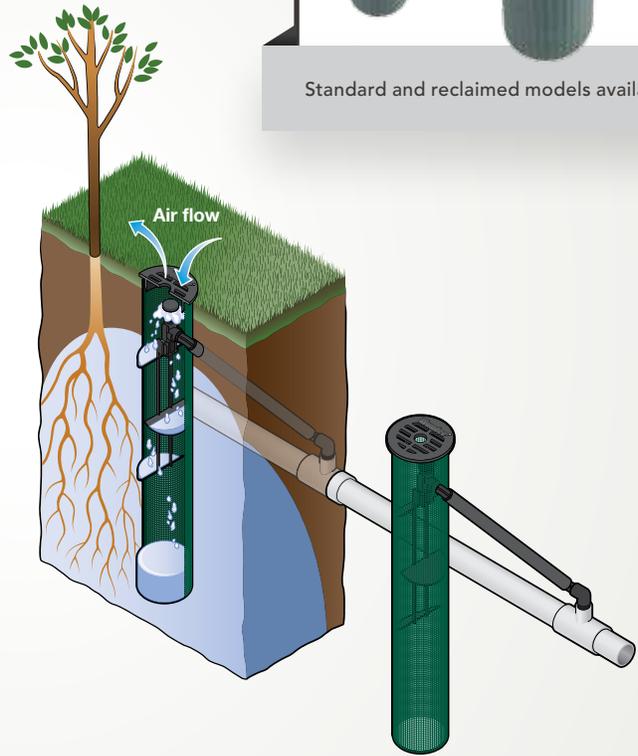

SPECIFICATIONBUILDER

www.hunterindustries.com/RZWS

MODELS	BUBBLER FLOW RATE	OPTIONS
RZWS-10 = 25 cm Root zone watering system	25 = 0.95 l/min 50 = 1.90 l/min	(blank) = No option CV = Check valve R = Reclaimed cap CV-R = Check valve with reclaimed cap
RZWS-18 = 45 cm Root zone watering system		
RZWS-36 = 90 cm Root zone watering system		

EXAMPLES


RZWS-18 - 25 - CV	45 m Root zone watering system at 0.95 l/min, with check valve
RZWS-10 - 50 - R	25 cm Root zone watering system at 1.90 l/min, with reclaimed cap
RZWS-36 - 25 - CV	90 cm Root zone watering system at 0.95 l/min, with check valve

**ADDITIONAL OPTIONS
SPECIFIED SEPARATELY**

- RZWS-SLEEVE = Field installed sleeve made from filter fabric
- RZWS-CAP = Replacement cap for 45 cm and 90 cm models
- RZWS-RCCAP = Reclaimed water replacement cap for 45 cm and 90 cm models

DRIP / MICRO

ACCESSORIES

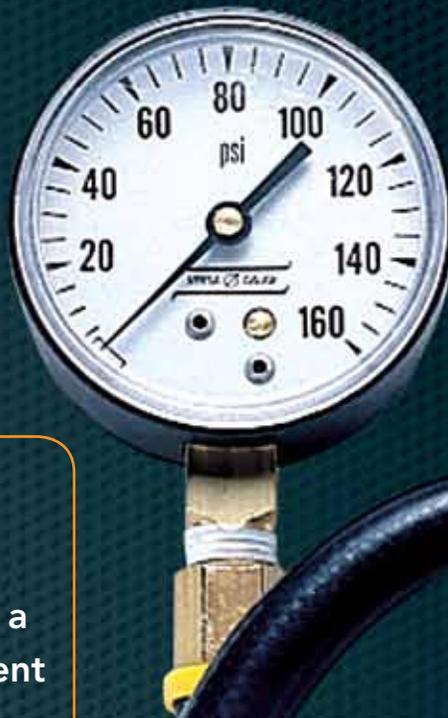

THE DISTINCTION IS IN THE DETAILS.


Hunter manufactures a full range of convenient accessories that save both time and money. Finish the job right and maintain Hunter quality throughout all projects.

ACCESSORIES

HCV

Models

- HC-50F-50F: ½" Female inlet x ½" Female outlet
- HC-50F-50M: ½" Female inlet x ½" Male outlet
- HC-75F-75M: ¾" Female inlet x ¾" Male outlet

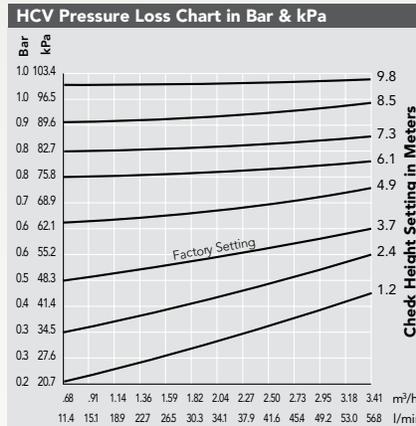

HCV: Overall height: 7.6 cm

HUNTER SPIRAL BARB ELBOWS

Models

- HSBE-050: ½" male NPT x spiral barb elbow
- HSBE-075: ¾" male NPT x spiral barb elbow
- HSBE TOOL: Insert tool

Features

- For use with FLEX_{SG} Tubing and Hunter Flexible Tubing (HFT-100)
- Acetel material for sharp barbs
- Operating pressure up to 5.5 bar; 550 kPa
- Compatible with FLEX_{SG}, HFT, and other brands




Spiral Barb Elbows:
HSBE-TOOL, HSBE-050, HSBE-075

SJ SWING JOINT


Models

- SJ-506: 1.3 cm (½") threaded x 15 cm (6") length standard
- SJ-506-R: 1.3 cm (½") threaded x 15 cm (6") length retrofit
- SJ-7506: 1.3 cm (½") x 1.9 cm (¾") threaded x 15 cm (6") length
- SJ-706: 1.9 cm (¾") threaded x 15 cm (6") length
- SJ-512: 1.3 cm (½") threaded x 30 cm (12") length
- SJ-7512: 1.3 cm (½") x 1.9 cm (¾") threaded x 30 cm (12") length
- SJ-712: 1.9 cm (¾") threaded x 30 cm (12") length

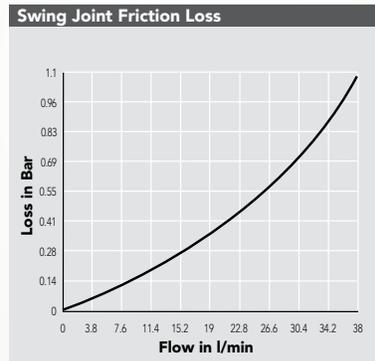

Features

- Standard configuration has swivel ells on both ends for maximum versatility
- Retrofit version has a 33/41 cm hex nut for easy threading into horizontally oriented fittings
- Unique patented swivel ells can be installed to virtually any configuration, leak free
- Pressure rated to 10 bar; 1000 kPa

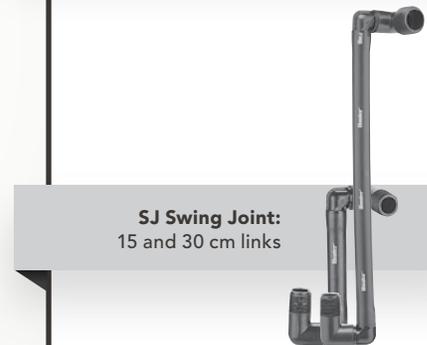

SJ Swing Joint:
15 and 30 cm links

HUNTER FLEXIBLE TUBING

Model

- HFT-100: 30 m roll

Features

- Inside diameter: 1.2 cm (0.49")
- Operating pressure: up to 5.5 bar; 550 kPa
- Linear low-density polyethylene material
- Meets ASTM D2104, D2239, D2737

FLEX_{SG} TUBING

Model

- FLEX_{SG}: 30 m roll

Features

- Engineered to resist kinking
- Inside diameter: 1.2 cm (0.49")
- Operating pressure: up to 5.5 bar; 550 kPa
- Linear low-density polyethylene material
- Meets ASTM D2104, D2239, D2737



Hunter Flexible Tubing:
30 m roll



FLEX_{SG} Tubing:
30 m roll

ACCESSORIES



Hand Pump:
P/N 460302



Rotor Pressure Gauge:
P/N 129900
(works with PGP-ADJ)



"T" Handle Tool:
P/N 053191



Nozzle Insertion Collar:
P/N 123200



MP Gauge Assembly:
P/N MPGAUGE



**Rotor Pitot Gauge
and Tube Assembly:**
P/N 280100

REPLACEMENT GUIDE

Bringing together a combination of intelligent design, carefully controlled manufacturing, and regular testing to ensure conformity to the strictest standards, Hunter has been able to create what performance studies have shown to be truly exceptional nozzles. Essentially, we have made the science of developing superior nozzles—and thus, superior sprinklers—look easy. In the process, we have also made it easy for you to determine exactly which of these high performance sprinklers make the appropriate choice for you to install as an alternative to your current product that does not carry the Hunter label. Simply consult our comprehensive replacement guide and you'll quickly see there's a better quality, better performing sprinkler from Hunter that will fit whatever irrigation need you have.

PGJ Gear Driven Rotary Sprinklers

TO REPLACE	USE HUNTER NOZZLE	
RAIN BIRD®		
3500	0.75	RED .75
	1	1.0
	1.5	1.5
	2	2.0
	3	3.0
	4	4
T-Bird T-22	.65 (Blue)	.75
	1.0 (Red)	1.0
	1.3 (Black)	1.5
	2.0 (Brown)	2.0
	2.5 (Gray)	2.5
	4.0 (Yellow)	4.0
T-Bird T-30	1.0 (Red)	1.0
	1.3 (Black)	1.5
	2.0 (Brown)	2.0
	2.5 (Gray)	2.5
	4.0 (Yellow)	4.0
	5.0 (Green)	5.0
NELSON®		
5500	#51	.75
	#52	1.5
	#53	2.0
	#54	2.5
TORO®		
300/340	1	.75
Stream Rotor	2	1.5
	3	3.0

PGP® Gear Driven Rotary Sprinklers

TO REPLACE	USE HUNTER NOZZLE		
RAIN BIRD®			
		RED	BLUE
Mini-Paw 15103	07 (Black)	6	2.5
	09 (Green)	7	3.0
Maxi-Paw 2045	06 (Red)	5	2.0
	07 (Black)	6	2.5
	08 (Blue)	8	4.0
	10 (Yellow)	9	5.0
	12 (Beige)	10	8.0
R-50	1.5 (Black)	5	2.0
	2.0 (Brown)	7	3.0
	3.0 (Gray)	8	4.0
	4.0 (Yellow)	9	5.0
	6.0 (Green)	10	8.0
T-Bird T-30	1.3 (Black)	4	1.5
	2.5 (Gray)	6	2.5
	5.0 (Green)	9	5.0
5000	1.5	4	1.5
	2.0	5	2.0
	3.0	7	3.0
	4.0	8	4.0
	6.0	9	5.0
	8.0	10	8.0
5505	2	5	2.0
	3	6	2.5
	4	7	3.0
	5	8	4.0
	6	9	5.0
	8	10	8.0
	10	10	8.0
	12	11	8.0
15111	10 (5/32" nozzle)	9	5.0
21A, 27A	10 (5/32" nozzle)	9	5.0
25	10 (5/32" nozzle)	9	5.0
31A, 37A	14 (7/32" nozzle)	11	8.0
35	12 (3/16" nozzle)	10	8.0
K-RAIN			
RPS75	0.50	1	--
	0.75	2	--
	1.0	4	1.5
	2.0	6	2.0
	2.5	7	2.5
	3.0	8	3.0
	4.0	9	4.0
	6.0	10	6.0
	8.0	11	8.0

PGP® Gear Driven Rotary Sprinklers

TO REPLACE	USE HUNTER NOZZLE		
TORO			
		RED	BLUE
300/340	308-XX-02	4	1.5
Stream Rotor	308-XX-03	7	3.0
	316-XX-02	7	3.0
	316-XX-03	10	8.0
XP-300 Series	XP-300-090-07	4	1.5
	180-07	7	3.0
	360-07	10	8.0
	XP-300-090-09	5	2.0
	180-09	8	4.0
	360-09	11	--
	XP-300-090-10	5	2.0
	180-10	9	5.0
	360-10	12	--
Super 600	1.3	4	1.5
	2.5	7	3.0
	5.0	10	8.0
	6.0	10	8.0
Super 700	1.3	3	1.5
	1.5	4	1.5
	2.0	5	2.0
	3.0	7	3.0
	4.5	8	4.0
	6.0	9	5.0
	7.5	10	8.0
	9.0	11	8.0
Super 800	0.50	1	--
	0.75	2	--
	1.0	4	1.5
	2.0	6	2.0
	2.5	7	2.5
	3.0	8	3.0
	4.0	9	4.0
	6.0	10	6.0
	8.0	11	8.0
TR50	1.0	3	--
	1.5	4	1.5
	2.0	5	2.0
	3.0	6	3.0
	4.5	8	4.0
	6.0	9	6.0
	7.5	10	8.0
	9.0	11	8.0

REPLACEMENT GUIDE

PGP Ultra/I-20 Gear Driven Rotary Sprinklers

TO REPLACE	USE HUNTER NOZZLE	
RAIN BIRD®		
		BLUE
Mini-Paw 15103	07 (Black)	2.5
	09 (Green)	3.0
Maxi-Paw 2045	06 (Red)	2.0
	07 (Black)	2.5
	08 (Blue)	4.0
	10 (Yellow)	5.0
	12 (Beige)	8.0
R-50	1.5 (Black)	2.0
	2.0 (Brown)	3.0
	3.0 (Gray)	4.0
	4.0 (Yellow)	5.0
	6.0 (Green)	8.0
T-Bird T-30	1.3 (Black)	1.5
	2.5 (Gray)	2.5
	5.0 (Green)	5.0
5000	1.5	1.5
	2.0	2.0
	3.0	3.0
	4.0	4.0
	6.0	5.0
	8.0	8.0
5505	2	2.0
	3	2.5
	4	3.0
	5	4.0
	6	5.0
	8	8.0
	10	8.0
	12	8.0
15111	10 (5/32" nozzle)	5.0
21A, 27A	10 (5/32" nozzle)	5.0
25	10 (5/32" nozzle)	5.0
31A, 37A	14 (7/32" nozzle)	8.0
35	12 (3/16" nozzle)	8.0
K-RAIN		
		BLUE
RPS75	0.50	--
	0.75	--
	1.0	1.5
	2.0	2.0
	2.5	2.5
	3.0	3.0
	4.0	4.0
	6.0	6.0
	8.0	8.0

PGP Ultra/I-20 Gear Driven Rotary Sprinklers

TO REPLACE	USE HUNTER NOZZLE	
TORO		
		BLUE
300 / 340	308-XX-02	1.5
Stream Rotor	308-XX-03	3.0
	316-XX-02	3.0
	316-XX-03	8.0
XP-300 Series	XP-300-090-07	1.5
	180-07	3.0
	360-07	8.0
	XP-300-090-09	2.0
	180-09	4.0
	360-09	--
	XP-300-090-10	2.0
	180-10	5.0
	360-10	--
Super 600	1.3	1.5
	2.5	3.0
	5.0	8.0
	6.0	8.0
Super 700	1.3	1.5
	1.5	1.5
	2.0	2.0
	3.0	3.0
	4.5	4.0
	6.0	5.0
	7.5	8.0
	9.0	8.0
Super 800	0.50	--
	0.75	--
	1.0	1.5
	2.0	2.0
	2.5	2.5
	3.0	3.0
	4.0	4.0
	6.0	6.0
	8.0	8.0
TR50	1.0	--
	1.5	1.5
	2.0	2.0
	3.0	3.0
	4.5	4.0
	6.0	6.0
	7.5	8.0
	9.0	8.0

Spray Sprinklers

TO REPLACE	USE HUNTER PRODUCT	
ALL MANUFACTURERS NOZZLES		
		NOZZLES
Nozzles	8' Radius	8A
	10' Radius	10A
	12' Radius	12A
	15' Radius	15A
	17' Radius	17A
Rain Bird 1800		PRO-SPRAY
1800 SAM		PRO-SPRAY-CV
1800 SAM PRS		PRO-SPRAY-PRS30-CV
Uni-Spray		PS ULTRA

REPLACEMENT GUIDE

I-25 Gear Driven Rotary Sprinklers

TO REPLACE		USE HUNTER NOZZLE
RAIN BIRD®		
FALCON	4 (Black)	4 (YELLOW)
	6 (Lt. Blue)	5 (WHITE)
	8 (Dk. Green)	7 (ORANGE)
	10 (Gray)	8 (LT. BROWN)
	12 (Beige)	10 (LT. GREEN)
	14 (Lt. Green)	13 (LT. BLUE)
	16 (Dk. Brown)	18 (RED)
	18 (Dk. Blue)	20 (DK. BROWN)
41-51A	18 x 11.5	20 (DK. BROWN)
41-51A	13 x 11	13 (LT. BLUE)
47A	16	13 (LT. BLUE)
37A	14	8 (LT. BROWN)
7005	4 (Black)	4 (YELLOW)
	6 (Lt. Blue)	5 (WHITE)
	8 (Dk. Green)	8 (LT. BROWN)
	10 (Gray)	10 (LT. GREEN)
	12 (Beige)	13 (LT. BLUE)
	14 (Lt. Green)	15 (GRAY)
	16 (Dk. Brown)	18 (RED)
	18 (Dk. Blue)	20 (DK. BROWN)
8005	12 (Beige)	13 (LT. BLUE)
	14 (Lt. Green)	15 (GRAY)
	16 (Dk. Brown)	18 (RED)
	18 (Dk. Blue)	20 (DK. BROWN)
	20 (Red)	23 (DK. GREEN)
	22 (Yellow)	25 (DK. BLUE)
	24 (Orange)	28 (BLACK)
Toro®		
2001	6 (Yellow)	7 (ORANGE)
	9 (Red)	8 (LT. BROWN)
	12 (Brown)	10 (LT. GREEN)
	18 (Blue)	18 (RED)
	24 (Green)	25 (DK. BLUE)
640	40	8 (LT. BROWN)
	41	10 (LT. GREEN)
	42	13 (LT. BLUE)
	43	15 (GRAY)
	44	20 (DK. BROWN)
NELSON®		
7000 & 7500	1	7 (ORANGE)
	2	8 (LT. BROWN)
	3	10 (LT. GREEN)
	4	13 (LT. BLUE)
	5	15 (GRAY)
	6	20 (DK. BROWN)
	7	23 (DK. GREEN)
	8	25 (DK. BLUE)
THOMPSON®		
186/187	P-Nozzle	5 (WHITE)
	Q-Nozzle	7 (ORANGE)
	R-Nozzle	13 (LT. BLUE)
	S-Nozzle	15 (GRAY)
	T-Nozzle	18 (RED)
	U-Nozzle	23 (DK. GREEN)
	VS-Nozzle	28 (BLACK)
	V-Nozzle	28 (BLACK)
	W-Nozzle	28 (BLACK)
SINGLE NOZZLE		ALL IMPACT MFRS
	5/32"	4 (YELLOW)
	11/64"	5 (WHITE)
	3/16"	7 (ORANGE)
	13/64"	8 (LT. BROWN)
	7/32"	10 (LT. GREEN)
	15/64"	13 (LT. BLUE)
	1/4"	15 (GRAY)
	17/64"	20 (DK. BROWN)

I-35 Gear Driven Rotary Sprinklers

TO REPLACE		USE HUNTER NOZZLE
TORO		
2001	9 (Red)	9 (LT. BROWN)
	18 (Blue)	18 (RED)
	24 (Green)	24 (DK. BLUE)
640	40	9 (LT. BROWN)
	42	12 (LT. BLUE)
	43	15 (GRAY)
	44	21 (DK. BROWN)
NELSON®		
7000 & 7500	2	9 (LT. BROWN)
	4	12 (LT. BLUE)
	5	15 (GRAY)
	6	21 (DK. BROWN)
	7	24 (DK. GREEN)
	8	27 (DK. BLUE)
THOMPSON®		
186/187	R-Nozzle	12 (LT. BLUE)
	S-Nozzle	15 (GRAY)
	T-Nozzle	18 (RED)
	U-Nozzle	24 (DK. GREEN)
	VS-Nozzle	30 (BLACK)
	V-Nozzle	30 (BLACK)
	W-Nozzle	30 (BLACK)
SINGLE NOZZLE		ALL IMPACT MFRS
	13/64"	9 (LT. BROWN)
	15/64"	12 (LT. BLUE)
	1/4"	15 (GRAY)
	17/64"	21 (DK. BROWN)
RAIN BIRD®		
FALCON	10 (Gray)	9 (LT. BROWN)
	14 (Lt. Green)	12 (LT. BLUE)
	16 (Dk. Brown)	18 (RED)
	18 (Dk. Blue)	21 (DK. BROWN)
41-51A	18 x 11.5	21 (DK. BROWN)
41-51A	13 x 11	12 (LT. BLUE)
47A	16	12 (LT. BLUE)
37A	14	9 (LT. BROWN)
7005	8 (Dk. Green)	9 (LT. BROWN)
	12 (Beige)	12 (LT. BLUE)
	14 (Lt. Green)	15 (GRAY)
	16 (Dk. Brown)	18 (RED)
	18 (Dk. Blue)	21 (DK. BROWN)
8005	12 (Beige)	12 (LT. BLUE)
	14 (Lt. Green)	15 (GRAY)
	16 (Dk. Brown)	18 (RED)
	18 (Dk. Blue)	21 (DK. BROWN)
	20 (Red)	24 (DK. GREEN)
	22 (Yellow)	27 (DK. BLUE)
	24 (Orange)	30 (BLACK)

REPLACEMENT GUIDE

I-40 Gear Driven Rotary Sprinklers

TO REPLACE	USE HUNTER NOZZLE	
RAIN BIRD®		
41-51A	18 x 11.5	44
41-51A	13 x 11	43
47A-SAM	16	42
37A	14	41
65 SERIES	16	42
8005	12 (Beige)	41
	14 (Lt. Green)	43
	16 (Dk. Brown)	43
	18 (Dk. Blue)	44
	20 (Red)	44
	22 (Yellow)	45
RAIN BIRD®		
TALON	14	42
	16	43
	18	44
	20	45
	22	45
THOMPSON®		
186/7	R-Nozzle	42
	S-Nozzle	43
	T-Nozzle	43
188/9	U-Nozzle	44
	V-Nozzle	45
TORO®		
640	USE HUNTER 40-44	
SINGLE NOZZLE	ALL IMPACT MFRS	
	15/64"	41
	1/4"	42
	17/64"	43
	9/32"	43

HQ-Quick Couplers

TO REPLACE	USE HUNTER HQ		
RAIN BIRD®	TORO®	BUCKNER	WEST AG/STORM
3RC	473-00, 473-01	QB3RC07	4V075-RY/QCV075-R
33DRC		QB33RC07	4V133-4A-RY/QCV133-4A-R
33DLRC, 33DNP		QB33LRC07, QB33NP07	4V133-4A-RL-NP/QCV133-4A-RL-2, QCV133-4A-N-2
44RC	474-21	QB44RC10	4V144-RY/QCV144-R
44LRC, 44NP	474-24	QB44LRC10, QB44NP10	4V144-RY, 4V144-RL, 4V144-RL-NP/QCV144-RL, QCV144-N
	474-21	QB44RCATAR10	
4NP-Acme	474-44	QB44LRCATAR10, QB44NPATAR10	
5RC	475-00, 475-01	QBRB5RC10	4V101-RY/QCV101-R
5LRC, 5NP	475-03, 475-04	QBRB5LRC10, QBRB5NP10	4V101-RY, 4V101-RL-NP/QCV101-RL, QCV101-N
5RC-BSP		QBRB5RC10BS	4V101-RY-BS/QCV101-R-BS
5LRC-BSP		QBRB5LRC10BS, QBRB5NP10BS	4V101-RY-BS, 4V101-RL-NP-BS/QCV101-RL-BS, QCV101-N-BS

HK-Keys, HS-Swivels & HLK-Locking Cover Key

TO REPLACE	USE HUNTER HK		
RAIN BIRD®	TORO®	BUCKNER	WEST AG/STORM
33K, 33DK	463-01	QB33K07	4C075/C075
44K	464-01	QB44K10	4C100/C100
4K-Acme	464-03	QB44KAT10	4C100A/C100A
55K-1	465-01	QB55K10	4C101/C101
TO REPLACE	USE HUNTER HS		
RAIN BIRD®	TORO®	BUCKNER	WEST AG/STORM
SH-0	477-00	HS075	4HS-075/HS075
SH-1	477-01	HS100	4HS-100/HS-100
SH-2	477-02	HS101	4HS-101/HS-101
		HS100BS	4HS-100-BS/HS-100-BS
		HS101BS	4HS-101-BS/HS-101-BS

PRECIPITATION RATES

A brief overview for the irrigation professional on how to calculate this important information.

In this section, the "Sprinkler Spacing Method-Any Arc and Any Spacing" equation is used to calculate precipitation rates. The first set of equations with the ■ shows the precipitation rate for the sprinklers when they are laid out in a square pattern. The next set with the ▲ shows the precipitation rate for the sprinklers laid out in an equilateral triangular spacing pattern. This is the "Sprinkler Spacing Method-Equilateral Triangular Spacing" equation.

WHAT IS "PRECIPITATION RATE"?

If someone said they were caught in a rainstorm that dropped one inch of water in an hour, you would have some idea of how "hard" or "heavily" the rain came down. A rainstorm that covers an area with 25 mm of water in one hour has a "precipitation rate" of 25 mm per hour. Similarly, the precipitation rate is the "speed" at which a sprinkler or an irrigation system applies water.

MATCHED PRECIPITATION RATES

A zone or system in which all the heads have similar precipitation rates is said to have "matched precipitation rates." Systems that have matched precipitation rates reduce wet and dry spots and excessive run times which lead to high water consumption and increased costs. Knowing that sprinkler spacing, flow rates, and arcs of coverage affect precipitation

rates, a general rule of thumb is: as the spray arc doubles, so should the flow.

■ 90° Arc = 3 l/min; 0.18 m³/hr

◐ 180° Arc = 6 l/min; 0.36 m³/hr

● 360° Arc = 12 l/min; 0.72 m³/hr

The flow rate of half-circle heads must be two times the flow rate of the quarter-circle heads, and the full-circle heads must have two times the flow rate of the half-circle heads. In the illustration, the same amount of water is applied to each quarter circle area and precipitation is therefore matched.

CALCULATING PRECIPITATION RATES

Depending upon the construction of the irrigation system, the precipitation rate may be calculated by either a "sprinkler spacing" or a "total area" method.


<p>Sprinkler Spacing Method The precipitation rate should be calculated for each individual zone. If all sprinkler heads on the zone have the same spacing, flow rate, and arc of coverage, use one of the following formulas:</p>	<p>Any Arc and Any Spacing (■):</p> $\text{P.R. (in/hr)} = \frac{\text{GPM (for any Arc)} \times 34,650}{\text{Degrees of Arc} \times \text{Head Spacing (ft)} \times \text{Row Spacing (ft)}}$ $\text{P.R. (mm/hr)} = \frac{\text{m}^3/\text{hr (for any Arc)} \times 360,000}{\text{Degrees of Arc} \times \text{Head Spacing (m)} \times \text{Row Spacing (m)}}$ $\text{P.R. (mm/hr)} = \frac{\text{l/min (for any Arc)} \times 21,600}{\text{Degrees of Arc} \times \text{Head Spacing (m)} \times \text{Row Spacing (m)}}$ <p>Equilateral Triangular Spacing (▲):</p> $\text{P.R. (in/hr)} = \frac{\text{GPM of 360 Arc} \times 96.25}{(\text{Head Spacing})^2 \times .866}$ $\text{P.R. (mm/hr)} = \frac{\text{l/min of 360 Arc} \times 60}{(\text{Head Spacing})^2 \times .866}$ $\text{P.R. (mm/hr)} = \frac{\text{m}^3/\text{hr} \times 1,000}{\text{Total Area}}$
<p>Total Area Method The precipitation rate for a "system" is the average precipitation rate of all sprinklers in an area, regardless of the spacing, flow rate, or arc for each head. The Total Area Method calculates all the flows of all of the heads in any given area.</p>	$\text{P.R. (in/hr)} = \frac{\text{Total GPM} \times 96.25}{\text{Total Area}}$ $\text{P.R. (mm/hr)} = \frac{\text{l/min} \times 60}{\text{Total Area}}$ $\text{P.R. (mm/hr)} = \frac{\text{m}^3/\text{hr} \times 1,000}{\text{Total Area}}$

For more information on precipitation rates, visit www.hunterindustries.com/mpbasics

TECHNICAL

SLOPE EQUIVALENTS/IRRIGATION

Percent, Angle, and Ratio

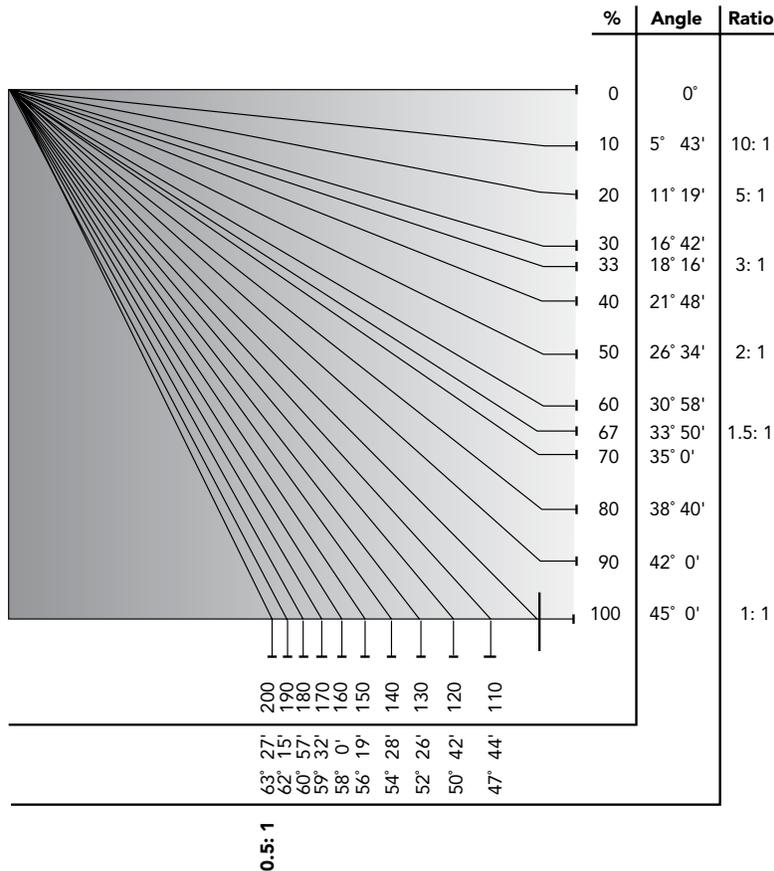

Slope Irrigation


Maximum precipitation rates for slopes in millimeters per hour

The maximum precipitation values listed below are those suggested by the United States Department of Agriculture. The values are average and may vary with respect to actual soil condition and condition of ground cover.

SOIL TEXTURE	0 to 5% slope		5 to 8% slope		8 to 12% slope		12% + slope	
	Cover	Bare	Cover	Bare	Cover	Bare	Cover	Bare
Coarse sandy soils	51	51	51	38	38	25	25	13
Coarse sandy soils over compact subsoils	44	38	32	25	25	19	19	10
Light sandy loams uniform	44	25	32	20	25	15	19	10
Light sandy loams over compact subsoils	32	19	25	13	19	10	13	8
Uniform silt loams	25	13	20	10	15	8	10	5
Silt loams over compact subsoil	15	8	13	6	10	4	8	3
Heavy clay or clay loam	5	4	4	3	3	2	3	2

HEIGHT OF SPRAY

The trajectory and spray height of the water stream leaving a sprinkler nozzle is important information when designing and installing irrigation systems.

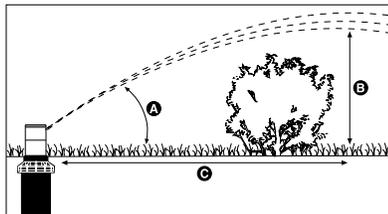

These rotor nozzle trajectory charts are designed to help determine how close a sprinkler can be placed to an object such as a fence or hedge without obstructing the spray pattern. All information shown is at optimum operating pressures.

Model	Nozzle No.	Pressure in Bar	Pressure in kPa	A Degrees of Trajectory	B Max Height of Spray (m)	C Distance from head (m) to Maximum Height
MP Rotator	3000	2.8	275	26	2.0	N/A
	2000	2.8	275	26	1.1	N/A
	1000	2.8	275	20	0.5	N/A
	Corner	2.8	275	14	0.4	N/A
	Side Strip	2.8	275	16	0.5	N/A
	Left Strip	2.8	275	16	0.5	N/A
PGJ	0.75	2.8	275	10	0.6	1.2
	1.0	2.8	275	10	0.6	2.4
	1.5	2.8	275	10	0.9	3.7
	2.0	2.8	275	15	1.5	4.9
	2.5	2.8	275	12	1.5	6.1
	3.0	2.8	275	15	1.5	6.1
	4.0	2.8	275	15	1.5	6.7
	5.0	2.8	275	15	1.8	7.3
PGP Red Nozzles	1	3.5	350	26	2.1	6.7
	2	3.5	350	26	2.1	6.7
	3	3.5	350	26	2.4	7.0
	4	3.5	350	26	2.4	7.0
	5	3.5	350	27	2.7	7.9
	6	3.5	350	27	3.0	8.5
	7	3.5	350	26	3.4	9.1
	8	3.5	350	26	3.4	9.1
	9	3.5	350	27	3.7	9.8
	10	4.0	400	25	4.0	9.8
	11	4.0	400	25	4.0	11.6
	12	4.0	400	25	4.0	12.2
PGP Low Angle Gray Nozzles	4	3.5	350	15	1.5	6.7
	5	3.5	350	15	1.2	6.7
	6	3.5	350	14	1.2	6.7
	7	3.5	350	14	1.2	6.7
	8	3.5	350	14	1.5	7.3
	9	3.5	350	15	1.5	7.9
PGP Blue Nozzles	10	4.0	400	15	1.8	9.1
	1.5	3.0	300	25	2.4	7.0
	2.0	3.0	300	25	2.4	7.0
	2.5	3.0	300	25	2.7	7.9
	3.0	3.0	300	25	3.0	8.5
	4.0	3.0	300	25	3.4	9.1
	5.0	3.0	300	25	3.4	9.1
	6.0	3.8	380	25	3.7	9.8
8.0	3.8	380	25	4.0	9.8	
PGP Ultra/I-20 Dark Blue Nozzles	1.0	3.5	350	26	2.4	7.0
	1.5	3.5	350	26	2.4	7.0
	2.0	3.5	350	27	2.7	7.9
	3.0	3.5	350	27	3.0	8.5
	3.5	3.5	350	26	3.4	9.1
	4.0	3.5	350	26	3.4	9.1
	6.0	3.5	350	27	3.7	9.8
	8.0	4.0	400	25	4.0	9.8
PGP Ultra/I-20 Blue Nozzles	1.5	3.0	300	25	2.4	7.0
	2.0	3.0	300	25	2.4	7.0
	2.5	3.0	300	25	2.7	7.9
	3.0	3.0	300	25	3.0	8.5
	4.0	3.0	300	25	3.4	9.1
	5.0	3.0	300	25	3.4	9.1
	6.0	3.8	380	25	3.7	9.8
	8.0	3.8	380	25	4.0	9.8

HEIGHT OF SPRAY

Hunter Nozzle Height and Trajectory Chart						
Model	Nozzle No.	Pressure in Bar	Pressure in kPa	A Degrees of Trajectory	B Max Height of Spray (m)	C Distance from head (m) to Maximum Height
PGP Ultra/I-20 Low Angle Nozzles	2.0 LA	3.5	350	13	1.5	6.7
	2.5 LA	3.5	350	13	1.2	6.7
	3.5 LA	3.5	350	13	1.2	6.7
	4.5 LA	3.5	350	13	1.2	6.7
PGP Ultra/I-20 Short Radius Black Nozzles	0.5	3.5	350	15	1.5	2.4
	1.0	3.5	350	14	1.8	2.7
	2.0	3.5	350	3	0.3	1.8
PGP Ultra / I-20 Short Radius Black Nozzles	0.75	3.5	350	22	2.1	4.0
	1.5	3.5	350	18	2.1	4.0
	3.0	3.5	350	8	0.3	1.8
I-25	4	3.5	350	25	2.7	6.7
	5	3.5	350	25	3.4	8.5
	7	3.5	350	25	3.0	8.5
	8	3.5	350	25	3.4	8.5
	10	4.0	400	25	3.7	9.1
	13	4.0	400	25	4.0	9.4
	15	4.0	400	25	3.7	9.4
	18	4.0	400	25	4.6	10.4
	20	5.0	500	25	4.6	10.7
	23	5.0	500	25	4.9	11.6
I-35	25	5.0	500	25	4.9	11.6
	28	5.0	500	25	5.2	12.2
	9	3.5	350	25	3.4	8.5
	12	4.0	400	25	4.0	9.4
	15	4.0	400	25	3.7	9.4
	18	4.0	400	25	4.6	10.4
	21	5.0	500	25	4.6	10.7
	24	5.0	500	25	4.9	11.6
I-40	27	5.0	500	25	4.9	11.6
	30	5.0	500	25	5.2	12.2
	40	3.5	350	25	3.7	9.8
	41	4.0	400	25	4.3	9.8
	42	4.0	400	25	4.3	10.4
I-60 ADS	43	4.0	400	25	4.6	12.8
	44	5.0	500	25	5.2	14.0
	45	5.0	500	25	5.2	14.6
	7	4.0	400	20	3.0	8.5
	10	4.0	400	20	4.0	11.6
	13	4.0	400	20	4.0	11.6
I-60 36S	15	4.0	400	20	4.3	12.2
	18	4.0	400	20	4.3	12.2
	20	4.0	400	20	4.6	14.0
	7	4.0	400	20	4.0	11.0
	10	4.0	400	20	4.3	12.2
I-90 ADV	13	4.0	400	20	4.3	12.5
	15	4.0	400	20	4.3	12.8
	18	4.0	400	20	4.3	13.1
	20	4.0	400	20	5.2	15.2
	33	5.5	550	22	4.6	12.8
	38	5.5	550	22	4.9	14.6
I-90 36V	43	5.5	550	22	4.9	14.6
	48	5.5	550	22	5.2	16.5
	53	5.5	550	22	5.2	17.1
	63	5.5	550	22	5.5	19.5
	33	5.5	550	22	5.2	14.0
I-90 ADV	38	5.5	550	22	5.2	15.2
	43	5.5	550	22	5.2	16.5
	48	5.5	550	22	5.2	17.1
	53	5.5	550	22	5.2	17.7
	63	5.5	550	22	5.5	18.9

PLD CHARTS

APPLICATION RATES

Emitter Flow Rate – 3.5 LPH			Emitter Flow Rate – 2.2 LPH			Emitter Flow Rate – 1.6 LPH		
Row Spacing (cm)	Emitter Spacing (cm)		Row Spacing (cm)	Emitter Spacing (cm)		Row Spacing (cm)	Emitter Spacing (cm)	
	30	50		30	50		30	50
30	38.9	23.3	30	24.4	14.7	30	17.8	10.7
35	33.3	20.0	35	21.0	12.6	35	15.2	9.1
40	29.2	17.5	40	18.3	11.0	40	13.3	8.0
45	25.9	15.6	45	16.3	9.8	45	11.9	7.1
50	23.3	14.0	50	14.7	8.8	50	10.7	6.4
55	21.2	12.7	55	13.3	8.0	55	9.7	5.8
60	19.4	11.7	60	12.2	7.3	60	8.9	5.3

PLD application rates in mm per hour

EMITTER LINE LENGTH CHARTS


Emitter Line Length – 3.8 LPM					Emitter Line Length – 2.3 LPM					Emitter Line Length – 1.5 LPM				
Pressure (bar)	Slope %	Emitter Spacing (m)			Pressure (bar)	Slope %	Emitter Spacing (m)			Pressure (bar)	Slope %	Emitter Spacing (m)		
		0.30	0.45	0.60			0.30	0.45	0.60			0.30	0.45	0.60
1.0	0	37	52	65	1.0	0	51	71	88	1.0	0	86	119	149
	2	41	58	74		2	56	81	105		2	96	138	179
	4	43	63	82		4	61	90	118		4	104	154	201
1.2	0	46	64	80	1.2	0	62	87	109	1.2	0	98	138	172
	2	49	69	89		2	67	96	123		2	108	155	199
	4	51	74	95		4	71	104	135		4	115	169	220
1.4	0	52	73	91	1.4	0	71	99	124	1.4	0	109	152	191
	2	54	78	99		2	75	108	137		2	117	169	216
	4	57	82	106		4	79	115	148		4	125	182	236
1.6	0	57	80	100	1.6	0	77	108	136	1.6	0	118	164	206
	2	59	84	107		2	82	117	149		2	126	180	230
	4	62	89	113		4	85	124	159		4	133	193	250
1.8	0	61	86	108	1.8	0	83	117	146	1.8	0	125	175	220
	2	64	91	115		2	87	124	158		2	133	190	243
	4	65	94	121		4	91	131	169		4	140	203	262
2.0	0	65	92	115	2.0	0	89	124	156	2.0	0	132	185	232
	2	67	96	121		2	92	131	167		2	140	199	254
	4	69	99	127		4	96	138	177		4	146	211	273
2.2	0	69	96	121	2.2	0	93	130	164	2.2	0	138	194	244
	2	71	100	127		2	97	138	175		2	146	207	265
	4	72	104	133		4	100	144	185		4	152	219	283
2.4	0	72	101	127	2.4	0	97	137	172	2.4	0	144	202	254
	2	74	104	133		2	101	144	182		2	151	215	275
	4	75	108	138		4	104	149	192		4	157	227	292
2.6	0	75	105	132	2.6	0	101	142	179	2.6	0	149	209	263
	2	77	109	138		2	105	149	189		2	156	222	284
	4	78	112	143		4	108	155	198		4	162	234	301
2.8	0	77	108	137	2.8	0	105	147	185	2.8	0	155	216	272
	2	79	113	142		2	108	154	196		2	161	229	292
	4	81	116	148		4	111	160	205		4	167	240	309
3.0	0	80	112	142	3.0	0	108	152	191	3.0	0	159	223	281
	2	82	116	147		2	112	158	201		2	166	236	300
	4	83	119	152		4	115	164	210		4	171	247	317

Maximum recommended PLD length on flat terrain, 2%, and 4% downhill slope.

DRIP ZONE CONTROL KIT CHARTS


ICZ101, PCZ101, ACZ075

Inlet pressure required for designed outlet pressure

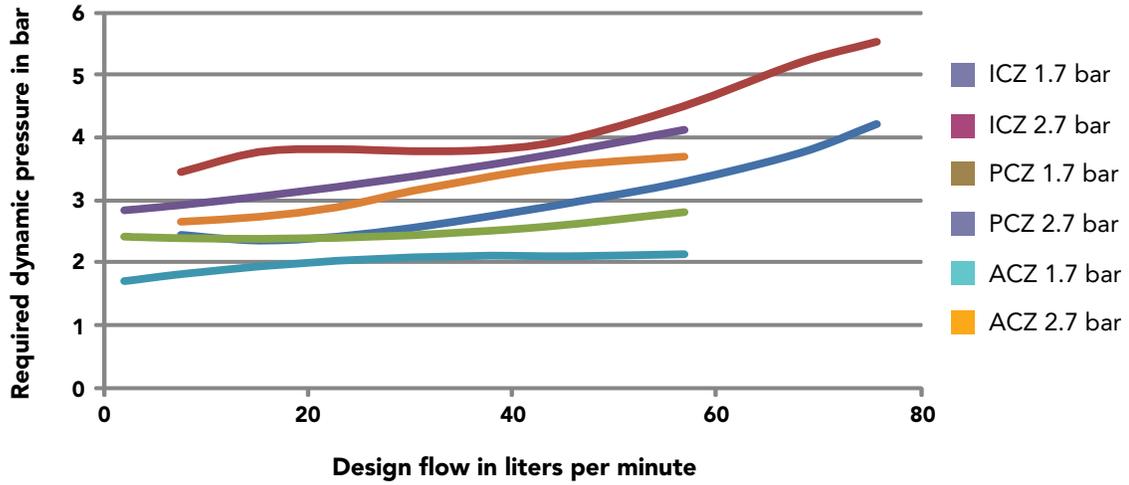

ICZ151

Inlet pressure required for designed outlet pressure

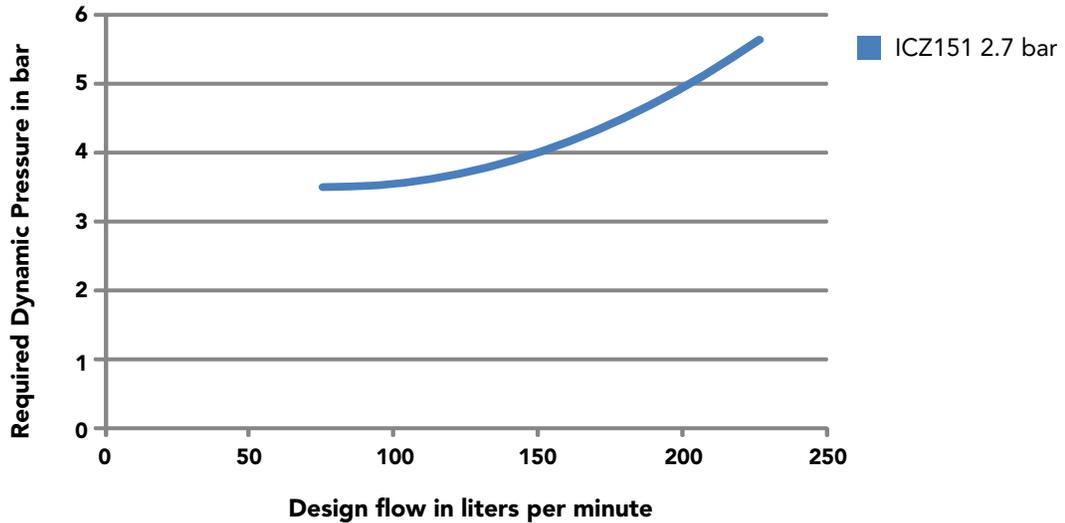

CONVERSION FACTORS

To Convert	From	To	Multiply By
AREA	acres	foot ²	43560
	acres	meter ²	4046.8
	meter ²	foot ²	10.764
	foot ²	inch ²	144
	inch ²	centimeter ²	6.452
	hectares	meter ²	10000
	hectares	acres	2.471
POWER	kilowatts	horsepower	1.341
FLOW	foot ³ /minute	meter ³ /second	0.0004719
	foot ³ /second	meter ³ /second	0.02832
	yards ³ /minute	meter ³ /second	0.01274
	gallon/minute	meter ³ /hour	0.22716
	gallon/minute	liter/minute	3.7854
	gallon/minute	liter/second	0.06309
	meter ³ /hour	liter/minute	16.645
	meter ³ /hour	liter/second	0.2774
liter/minute	liter/second	60	
LENGTH	foot	inch	12
	inch	centimeter	2.540
	foot	meter	0.30481
	kilometer	miles	0.6214
	miles	foot	5280
	miles	meter	1609.34
	millimeter	inch	0.03937
PRESSURE	PSI	kilopascals	6.89476
	PSI	bar	0.068948
	bar	kilopascals	100
	PSI	feet of head	2.31
VELOCITY	feet/second	meter/second	0.3048
VOLUME	feet ³	gallon	7.481
	feet ³	liter	28.32
	meter ³	feet ³	35.31
	meter ³	yard ³	1.3087
	yard ³	feet ³	27
	yard ³	gallon	202
	acres/feet	foot ³	43,560
	gallon	meter ³	0.003785
	gallon	liter	3.785
	imperial gallon	gallon	1.833

TECHNICAL

FRICION LOSS CHARTS

UPCV PIPE CLASS 3 (6 BAR) C=150 • PRESSURE LOSS (BAR/100 METERS)

Nominal Size	Pipe OD	Pipe ID	Wall thick	Flow	40 mm		50 mm		63 mm		75 mm		90 mm		110 mm		160 mm		200 mm		
					Velocity	Bar	Velocity	Bar	Velocity	Bar	Velocity										
GPM	m ³ /hr	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss
1	0.25																				
2	0.5																				
3	0.75																				
4	1	0.3	0.03																		
7	1.5	0.4	0.06	0.2	0.02																
9	2	0.5	0.09	0.3	0.03																
11	2.5	0.7	0.14	0.4	0.04																
13	3	0.8	0.20	0.5	0.06																
15	3.5	0.9	0.27	0.6	0.08																
18	4	1.1	0.34	0.7	0.10																
22	5	1.3	0.52	0.8	0.16																
26	6	1.6	0.72	1.0	0.22	0.6	0.07	0.4	0.03												
31	7	1.9	0.96	1.1	0.30	0.7	0.09	0.5	0.04												
35	8	2.1	1.23	1.3	0.38	0.8	0.12	0.6	0.05												
40	9	2.4	1.53	1.5	0.47	0.9	0.14	0.6	0.06												
44	10	2.7	1.86	1.6	0.57	1.0	0.17	0.7	0.07												
48	11			1.8	0.68	1.1	0.21	0.8	0.09	0.5	0.04										
53	12			2.0	0.80	1.2	0.24	0.9	0.10	0.6	0.04										
57	13			2.1	0.93	1.3	0.28	0.9	0.12	0.6	0.05										
62	14			2.3	1.07	1.4	0.33	1.0	0.14	0.7	0.06										
66	15			2.5	1.21	1.5	0.37	1.1	0.16	0.7	0.06	0.5	0.02								
70	16					1.6	0.42	1.1	0.18	0.8	0.07	0.5	0.03								
75	17					1.7	0.47	1.2	0.20	0.8	0.08	0.6	0.03								
79	18					1.8	0.52	1.3	0.22	0.9	0.09	0.6	0.03								
84	19					1.9	0.57	1.3	0.24	0.9	0.10	0.6	0.04								
88	20					2.0	0.63	1.4	0.27	1.0	0.11	0.7	0.04								
92	21					2.1	0.69	1.5	0.29	1.0	0.12	0.7	0.05								
97	22					2.2	0.75	1.6	0.32	1.1	0.13	0.7	0.05								
101	23					2.3	0.82	1.6	0.35	1.1	0.14	0.8	0.05								
106	24							1.7	0.37	1.2	0.16	0.8	0.06								
110	25							1.8	0.40	1.2	0.17	0.8	0.06								
114	26							1.8	0.43	1.3	0.18	0.9	0.07								
119	27							1.9	0.47	1.3	0.19	0.9	0.07								
123	28							2.0	0.50	1.4	0.21	0.9	0.08								
128	29							2.1	0.53	1.4	0.22	1.0	0.08								
132	30							2.1	0.57	1.5	0.23	1.0	0.09								
154	35									1.7	0.31	1.2	0.12								
176	40									2.0	0.40	1.3	0.15								
198	45									2.2	0.50	1.5	0.19								
220	50											1.6	0.23								
242	55											1.8	0.27								
264	60											2.0	0.32								
286	65											2.1	0.37	1.0	0.05						
308	70											2.3	0.42	1.1	0.06						
330	75													1.1	0.07						
352	80													1.2	0.08						
374	85													1.3	0.09						
396	90													1.4	0.10						
440	100													1.5	0.12	1.00	0.04				
484	110													1.7	0.14	1.10	0.05				
528	120													1.8	0.17	1.20	0.06				
572	130													2.0	0.20	1.30	0.07				
616	140													2.1	0.23	1.40	0.08				
660	150													2.3	0.26	1.50	0.09				

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

FRICION LOSS CHARTS

UPCV PIPE CLASS 4 (10 BAR) C=150 • PRESSURE LOSS (BAR/100 METERS)

Nominal Size	Pipe OD	Pipe ID	Wall thick	Flow	25 mm		32 mm		40 mm		50 mm		63 mm		75 mm		90 mm		110 mm		160 mm		200 mm			
					Velocity	Bar	Velocity	Bar	Velocity	Bar	Velocity	Bar	Velocity	Bar												
GPM	m ³ /hr	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	
1	0.25	0.2	0.02																							
2	0.5	0.4	0.08																							
3	0.75	0.5	0.18																							
4	1	0.7	0.30																							
7	1.5	1.1	0.64	0.7	0.19																					
9	2	1.5	1.10	0.9	0.32																					
11	2.5	1.8	1.66	1.1	0.48	0.7	0.15																			
13	3	2.2	2.33	1.3	0.67	0.8	0.21																			
15	3.5	2.6	3.10	1.5	0.89	0.9	0.27																			
18	4			1.8	1.14	1.1	0.35	0.7	0.12																	
22	5			2.2	1.73	1.3	0.53	0.9	0.18																	
26	6			2.6	2.42	1.6	0.74	1.0	0.25	0.7	0.08															
31	7					1.9	0.99	1.2	0.34	0.8	0.11															
35	8					2.2	1.27	1.4	0.43	0.9	0.14															
40	9					2.4	1.58	1.6	0.53	1.0	0.17	0.7	0.07													
44	10							1.7	0.65	1.1	0.21	0.8	0.09													
48	11							1.9	0.77	1.2	0.25	0.8	0.11													
53	12							2.1	0.91	1.3	0.29	0.9	0.13													
57	13							2.3	1.06	1.4	0.34	1.0	0.15													
62	14							2.4	1.21	1.5	0.39	1.1	0.17													
66	15							2.6	1.38	1.6	0.44	1.2	0.19													
70	16									1.7	0.50	1.2	0.22	0.9	0.09											
75	17									1.9	0.56	1.3	0.24	0.9	0.10											
79	18									2.0	0.62	1.4	0.27	1.0	0.11											
84	19									2.1	0.69	1.5	0.30	1.0	0.12											
88	20									2.2	0.76	1.5	0.33	1.1	0.13											
92	21									2.3	0.83	1.6	0.36	1.1	0.15											
97	22									2.4	0.90	1.7	0.39	1.2	0.16											
101	23									2.5	0.98	1.8	0.42	1.2	0.17											
106	24											1.8	0.46	1.3	0.19											
110	25											1.9	0.49	1.3	0.20											
114	26											2.0	0.53	1.4	0.22	0.9	0.08									
119	27											2.1	0.57	1.4	0.23	1.0	0.09									
123	28											2.2	0.61	1.5	0.25	1.0	0.09									
128	29											2.2	0.65	1.5	0.27	1.0	0.10									
132	30											2.3	0.69	1.6	0.28	1.1	0.11	0.5	0.02							
154	35													1.9	0.38	1.3	0.14	0.6	0.02							
176	40													2.1	0.48	1.4	0.18	0.7	0.03							
198	45													2.4	0.60	1.6	0.23	0.8	0.04							
220	50															1.8	0.28	0.8	0.04							
242	55															2.0	0.33	0.9	0.05							
264	60															2.1	0.39	1.0	0.06							
286	65															2.3	0.45	1.1	0.07							
308	70															2.5	0.51	1.2	0.08							
330	75															2.7	0.58	1.3	0.09							
352	80															2.9	0.66	1.4	0.11							
374	85															3.0	0.74	1.4	0.12							
396	90															3.2	0.82	1.5	0.13	1.0	0.04					
440	100																1.7	0.16	1.1	0.05						
484	110																1.9	0.19	1.2	0.06						
528	120																2.0	0.22	1.3	0.08						
572	130																2.2	0.26	1.4	0.09						
616	140																2.4	0.30	1.5	0.10						
660	150																2.5	0.34	1.6	0.11						

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

FRICION LOSS CHARTS

UPVC CLASS 5 (16 BAR) C=150 • PRESSURE LOSS (BAR/100 METERS)

Nominal Size	25 mm	32 mm	40 mm	50 mm	63 mm	75 mm	90 mm	110 mm	160 mm	200 mm		
Pipe ID mm	21.2 mm	27.2 mm	34 mm	42.6 mm	53.6 mm	63.8 mm	76.6 mm	93.6 mm	136.2 mm	170.2 mm		
Pipe OD	25 mm	32 mm	40 mm	50 mm	63 mm	75 mm	90 mm	110 mm	160 mm	200 mm		
Wall thick	1.5 mm	1.8 mm	1.9 mm	2.4 mm	3 mm	3.6 mm	4.3 mm	5.3 mm	7.7 mm	14.9 mm		
Flow	Velocity Bar		Velocity Bar									
GPM m ³ /hr	m/s loss	m/s loss	m/s loss									
1 0.25	0.2	0.03										
2 0.5	0.4	0.10										
3 0.75	0.6	0.21										
4 1	0.8	0.36	0.4	0.06								
			0.5	0.11	0.3	0.04						
7 1.5	1.2	0.77	0.7	0.23	0.5	0.08	0.3	0.03				
9 2	1.6	1.32	1.0	0.39	0.6	0.13	0.4	0.04				
11 2.5	2.0	1.99	1.2	0.59	0.8	0.20	0.5	0.07				
13 3	2.4	2.79	1.4	0.83	0.9	0.28	0.6	0.09				
15 3.5			1.7	1.10	1.1	0.37	0.7	0.12				
18 4			1.9	1.41	1.2	0.48	0.8	0.16				
22 5			2.4	2.13	1.5	0.72	1.0	0.24				
26 6					1.8	1.01	1.2	0.34				
31 7					2.1	1.34	1.4	0.45				
35 8					2.4	1.72	1.6	0.57				
40 9							1.8	0.71				
44 10							1.9	0.87				
					2.1	1.03	1.4	0.34	1.0	0.14		
48 11					2.3	1.21	1.5	0.40	1.0	0.17		
53 12							1.6	0.46	1.1	0.20		
57 13							1.7	0.53	1.2	0.23		
62 14							1.8	0.60	1.3	0.26		
66 15							2.0	0.68	1.4	0.29	1.0	0.12
70 16							2.1	0.76	1.5	0.32	1.0	0.13
75 17							2.2	0.84	1.6	0.36	1.1	0.15
79 18							2.3	0.93	1.7	0.40	1.1	0.16
84 19							2.5	1.02	1.7	0.44	1.2	0.18
88 20									1.8	0.48	1.3	0.20
92 21									1.9	0.52	1.3	0.21
97 22									2.0	0.57	1.4	0.23
101 23									2.1	0.61	1.4	0.25
106 24									2.2	0.66	1.5	0.27
110 25									2.3	0.71	1.6	0.29
114 26									2.3	0.76	1.6	0.31
119 27									2.4	0.82	1.7	0.33
123 28									2.5	0.87	1.7	0.36
128 29									1.8	0.38	1.2	0.14
132 30									2.1	0.51	1.4	0.19
154 35									2.4	0.65	1.6	0.24
176 40									2.7	0.81	1.8	0.30
198 45											2.0	0.37
220 50											2.2	0.44
242 55											2.4	0.52
264 60											2.6	0.60
286 65											2.8	0.69
308 70											3.0	0.78
330 75											3.2	0.88
352 80											1.5	0.14
374 85											1.6	0.16
396 90											1.7	0.18
440 100											1.9	0.21
484 110											2.1	0.26
528 120											2.3	0.30
572 130											2.5	0.35
616 140											2.7	0.40
660 150											2.9	0.45
											1.2	0.07
											1.3	0.09
											1.5	0.10
											1.6	0.12
											1.7	0.14
											1.8	0.15

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

FRICION LOSS CHARTS

SCHEDULE 40 IPS PVC PLASTIC PIPE C=150 • PRESSURE LOSS (BAR/100 METERS)

Nominal Size	1"	1¼"	1½"	2"	2½"	3"	4"	6"	8"				
Pipe OD	1.315"	1.66"	1.900"	2.375	2.375"	3.500"	4.500"	6.625"	8.625"				
Pipe ID	1.049"	1.380"	1.610"	2.067"	2.469"	3.068"	4.026"	6.065"	7.981"				
Pipe ID mm	26.64	35.05	40.89	52.50	62.71	77.93	102.26	154.05	202.72				
Wall thick	0.133"	0.140"	0.145"	0.154"	0.154"	0.203"	0.216"	0.280"	0.322"				
Flow	Velocity Bar		Velocity Bar		Velocity Bar		Velocity Bar		Velocity Bar		Velocity Bar		
GPM	m³/hr	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss	m/s	loss
1	0.25	0.1	0.01										
2	0.5	0.2	0.03										
3	0.75	0.4	0.07	0.2	0.02								
4	1	0.5	0.12	0.3	0.03	0.2	0.01						
7	1.5	0.7	0.25	0.4	0.07	0.3	0.03	0.2	0.01				
9	2	1.0	0.43	0.6	0.11	0.4	0.05	0.3	0.02				
11	2.5	1.2	0.65	0.7	0.17	0.5	0.08	0.3	0.02				
13	3	1.5	0.92	0.9	0.24	0.6	0.11	0.4	0.03				
15	3.5	1.7	1.22	1.0	0.32	0.7	0.15	0.4	0.04				
18	4	2.0	1.56	1.2	0.41	0.8	0.19	0.5	0.06				
22	5	2.5	2.36	1.4	0.62	1.1	0.29	0.6	0.09				
26	6			1.7	0.87	1.3	0.41	0.8	0.12	0.5	0.05	0.3	0.02
31	7			2.0	1.16	1.5	0.55	0.9	0.16	0.6	0.07	0.4	0.02
35	8			2.3	1.48	1.7	0.70	1.0	0.21	0.7	0.09	0.5	0.03
40	9			2.6	1.84	1.9	0.87	1.2	0.26	0.8	0.11	0.5	0.04
44	10			2.9	2.24	2.1	1.06	1.3	0.31	0.9	0.13	0.6	0.05
48	11					2.3	1.26	1.4	0.37	1.0	0.16	0.6	0.05
53	12					2.5	1.48	1.5	0.44	1.1	0.18	0.7	0.06
57	13					2.7	1.72	1.7	0.51	1.2	0.21	0.8	0.07
62	14					3.0	1.97	1.8	0.58	1.3	0.25	0.8	0.09
66	15					3.2	2.24	1.9	0.66	1.3	0.28	0.9	0.10
70	16							2.1	0.75	1.4	0.31	0.9	0.11
75	17							2.2	0.84	1.5	0.35	1.0	0.12
79	18							2.3	0.93	1.6	0.39	1.0	0.14
84	19							2.4	1.03	1.7	0.43	1.1	0.15
88	20							2.6	1.13	1.8	0.48	1.2	0.17
92	21									1.9	0.52	1.2	0.18
97	22									2.0	0.57	1.3	0.20
101	23									2.1	0.62	1.3	0.21
106	24									2.2	0.67	1.4	0.23
110	25									2.2	0.72	1.5	0.25
114	26									2.3	0.77	1.5	0.27
119	27									2.4	0.83	1.6	0.29
123	28											1.6	0.31
128	29											1.7	0.33
132	30											1.7	0.35
154	35									2.0	0.47	1.2	0.12
176	40									2.3	0.60	1.4	0.16
198	45									2.6	0.74	1.5	0.20
220	50									2.9	0.90	1.7	0.24
242	55											1.9	0.29
264	60											2.0	0.34
286	65											2.2	0.39
308	70											2.4	0.45
330	75											2.5	0.51
352	80											2.7	0.57
374	85											2.9	0.64
396	90											3.0	0.71
440	100											1.5	0.15
484	110											1.6	0.18
528	120											1.8	0.21
572	130											1.9	0.25
616	140											2.1	0.28
660	150											2.1	0.32
												1.3	0.07
												0.9	0.03
												0.9	0.04
												1.0	0.04
												1.1	0.05
												1.2	0.06
												1.2	0.06
												1.3	0.07

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

FRICION LOSS CHARTS

SCHEDULE 80 IPS PVC PLASTIC PIPE C=150 • PRESSURE LOSS (BAR/100 METERS)

Nominal Size	1"	1¼"	1½"	2"	2½"	3"	4"	6"	8"			
Pipe OD	1.315	1.660	1.900	2.375	2.875	3.500	4.500	6.625	8.625			
Pipe ID	0.957	1.278	1.500	1.939	2.323	2.900	3.826	5.761	7.625			
Pipe ID mm	24.31	32.46	38.10	49.25	59.00	73.66	97.18	146.33	193.68			
Wall thick	0.179	0.191	0.200	0.218	0.276	0.300	0.337	0.432	0.500			
Flow	Velocity Bar		Velocity Bar									
GPM m³/hr	m/s loss	m/s loss	m/s loss									
1 0.25	0.1 0.01											
2 0.5	0.3 0.05											
3 0.75	0.4 0.11	0.3 0.03										
4 1	0.6 0.19	0.3 0.05	0.2 0.02									
7 1.5	0.9 0.40	0.5 0.10	0.4 0.04	0.2 0.01								
9 2	1.2 0.68	0.7 0.17	0.5 0.08	0.3 0.02								
11 2.5	1.5 1.02	0.8 0.25	0.6 0.11	0.4 0.03								
13 3	1.8 1.43	1.0 0.35	0.7 0.16	0.4 0.05								
15 3.5	2.1 1.90	1.2 0.47	0.9 0.21	0.5 0.06								
18 4	2.4 2.44	1.3 0.60	1.0 0.27	0.6 0.08								
22 5	3.0 3.69	1.7 0.90	1.2 0.41	0.7 0.12								
26 6		2.0 1.26	1.5 0.58	0.9 0.17	0.6 0.07	0.4 0.02						
31 7		2.3 1.68	1.7 0.77	1.0 0.22	0.7 0.09	0.5 0.03						
35 8		2.7 2.15	1.9 0.99	1.2 0.28	0.8 0.12	0.5 0.04						
40 9		3.0 2.68	2.2 1.23	1.3 0.35	0.9 0.15	0.6 0.05						
44 10			2.4 1.49	1.5 0.43	1.0 0.18	0.7 0.06						
48 11			2.7 1.78	1.6 0.51	1.1 0.21	0.7 0.07						
53 12			2.9 2.09	1.7 0.60	1.2 0.25	0.8 0.08						
57 13				1.9 0.69	1.3 0.29	0.8 0.10						
62 14				2.0 0.80	1.4 0.33	0.9 0.11						
66 15				2.2 0.91	1.5 0.38	1.0 0.13						
70 16				2.3 1.02	1.6 0.42	1.0 0.14						
75 17				2.5 1.14	1.7 0.47	1.1 0.16						
79 18				2.6 1.27	1.8 0.53	1.2 0.18						
84 19					1.9 0.58	1.2 0.20						
88 20					2.0 0.64	1.3 0.22						
92 21					2.1 0.70	1.4 0.24						
97 22					2.2 0.76	1.4 0.26						
101 23					2.3 0.83	1.5 0.28						
106 24					2.4 0.90	1.6 0.30						
110 25					2.5 0.97	1.6 0.33						
114 26						1.7 0.35						
119 27						1.8 0.38						
123 28						1.8 0.41	1.0 0.11					
128 29						1.9 0.43	1.1 0.11					
132 30						2.0 0.46	1.1 0.12					
154 35						2.3 0.61	1.3 0.16					
176 40						2.6 0.78	1.5 0.20					
198 45							1.7 0.25					
220 50							1.9 0.31					
242 55							2.1 0.37					
264 60							2.2 0.43					
286 65							2.4 0.50	1.1 0.07				
308 70							2.6 0.57	1.2 0.08				
330 75							2.8 0.65	1.2 0.09				
352 80							3.0 0.73	1.3 0.10				
374 85							3.2 0.82	1.4 0.11				
396 90							3.4 0.91	1.5 0.12				
440 100								1.7 0.15	0.9 0.04			
484 110								1.8 0.18	1.0 0.05			
528 120								2.0 0.21	1.1 0.05			
572 130								2.1 0.25	1.2 0.06			
616 140								2.3 0.28	1.3 0.07			
660 150								2.5 0.32	1.4 0.08			

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

FRICION LOSS CHARTS

HDPE PRESSURE PIPE PE80 SDR 17.6 PN6 C=140 • PSI LOSS 100 MTR OF PIPE (BAR)

Nominal Size	25 mm	32 mm	40 mm	50 mm	63 mm	75 mm	90 mm	110 mm	160 mm	200 mm		
Pipe ID mm	21.40	28.40	35.40	44.20	55.80	66.40	79.80	97.40	141.80	177.20		
Wall thick	1.8	1.8	2.3	2.9	3.6	4.3	5.1	6.3	9.1	11.4		
Flow	Velocity Bar		Velocity Bar									
GPM m ³ /hr	m/s loss	m/s loss	m/s loss									
1 0.25	0.2	0.03										
2 0.5	0.4	0.11										
3 0.75	0.6	0.23	0.3	0.06								
4 1	0.8	0.40	0.4	0.10	0.3	0.03						
7 1.5	1.2	0.84	0.7	0.21	0.4	0.07	0.3	0.02				
9 2	1.5	1.43	0.9	0.36	0.6	0.12	0.4	0.04				
11 2.5	1.9	2.16	1.1	0.54	0.7	0.19	0.5	0.06				
13 3	2.3	3.03	1.3	0.76	0.8	0.26	0.5	0.09				
15 3.5	2.7	4.03	1.5	1.01	1.0	0.35	0.6	0.12				
18 4	3.1	5.16	1.8	1.30	1.1	0.44	0.7	0.15				
22 5			2.2	1.96	1.4	0.67	0.9	0.23				
26 6			2.6	2.75	1.7	0.94	1.1	0.32	0.7	0.10	0.5	0.04
31 7			3.1	3.66	2.0	1.25	1.3	0.42	0.8	0.14	0.6	0.06
35 8			3.5	4.69	2.3	1.60	1.4	0.54	0.9	0.17	0.6	0.07
40 9					2.5	2.00	1.6	0.68	1.0	0.22	0.7	0.09
44 10					2.8	2.43	1.8	0.82	1.1	0.26	0.8	0.11
48 11					2.0	0.98	1.2	0.32	0.9	0.14		
53 12					2.2	1.15	1.4	0.37	1.0	0.16		
57 13					2.4	1.34	1.5	0.43	1.0	0.18		
62 14					2.5	1.53	1.6	0.49	1.1	0.21		
66 15					2.7	1.74	1.7	0.56	1.2	0.24		
70 16					2.9	1.96	1.8	0.63	1.3	0.27		
75 17					3.1	2.20	1.9	0.71	1.4	0.30		
79 18					3.3	2.44	2.0	0.79	1.4	0.34		
84 19							2.2	0.87	1.5	0.37		
88 20							2.3	0.95	1.6	0.41		
92 21							2.4	1.04	1.7	0.45	1.2	0.18
97 22							2.5	1.14	1.8	0.49	1.2	0.20
101 23							2.6	1.24	1.8	0.53	1.3	0.22
106 24							2.7	1.34	1.9	0.57	1.3	0.23
110 25							3.8	1.44	2.0	0.62	1.4	0.25
114 26									2.1	0.67	1.4	0.27
119 27									2.2	0.71	1.5	0.29
123 28									2.2	0.76	1.6	0.31
128 29									2.3	0.81	1.6	0.33
132 30									2.4	0.87	1.7	0.35
154 35									2.8	1.15	1.9	0.47
176 40									3.2	1.48	2.2	0.60
198 45											2.5	0.75
220 50											2.8	0.91
242 55											3.1	1.09
264 60											3.3	1.28
286 65											2.4	0.56
308 70											2.6	0.64
330 75												
352 80												
374 85												
396 90												
440 100												
484 110												
528 120												
572 130												
616 140												
660 150												

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

FRICION LOSS CHARTS

HDPE PRESSURE PIPE PE80 SDR 11, PN10

C=140 • PSI LOSS 100 MTR OF PIPE (BAR)

Nominal Size Pipe ID mm Wall thick Flow	25 mm 20.40 2.3	32 mm 26.20 2.9		40 mm 32.60 3.7		50 mm 40.80 4.6		63 mm 51.40 5.8		75 mm 61.40 6.8		90 mm 73.60 8.2		110 mm 90.00 10		160 mm 130.80 14.6		200 mm 163.60 18.2	
		Velocity m/s	Bar loss	Velocity m/s	Bar loss	Velocity m/s	Bar loss												
1	0.25	0.2	0.04																
2	0.5	0.4	0.14																
3	0.75	0.6	0.29	0.4	0.09														
4	1	0.8	0.50	0.5	0.15														
7	1.5	1.3	1.06	0.8	0.31	0.5	0.11												
9	2	1.7	1.80	1.0	0.53	0.7	0.18												
11	2.5	2.1	2.73	1.3	0.81	0.8	0.28	0.5	0.09										
13	3	2.5	3.82	1.5	1.13	1.0	0.39	0.6	0.13										
15	3.5	3.0	5.08	1.8	1.50	1.2	0.52	0.7	0.17										
18	4			2.1	1.92	1.3	0.66	0.8	0.22	0.5	0.07								
22	5			2.6	2.91	1.7	1.00	1.1	0.34	0.7	0.11								
26	6			3.1	4.08	2.0	1.41	1.3	0.47	0.8	0.15								
31	7					2.3	1.87	1.5	0.63	0.9	0.20								
35	8					2.7	2.40	1.7	0.80	1.1	0.26								
40	9					3.0	2.98	1.9	1.00	1.2	0.32								
44	10							2.1	1.21	1.3	0.39								
48	11							2.3	1.45	1.5	0.47	1.0	0.20						
53	12							2.5	1.70	1.6	0.55	1.1	0.23						
57	13							2.8	1.97	1.7	0.64	1.2	0.27						
62	14							3.0	2.27	1.9	0.74	1.3	0.31						
66	15									2.0	0.84	1.4	0.35						
70	16							2.1	0.94	1.5	0.40								
75	17							2.3	1.05	1.6	0.44	1.1	0.18						
79	18							2.4	1.17	1.7	0.49	1.2	0.20						
84	19							2.5	1.30	1.8	0.54	1.2	0.23						
88	20							2.7	1.42	1.9	0.60	1.3	0.25						
92	21							2.8	1.56	2.0	0.66	1.4	0.27						
97	22							2.9	1.70	2.1	0.71	1.4	0.30						
101	23							3.1	1.84	2.2	0.78	1.5	0.32						
106	24									2.3	0.84	1.6	0.35						
110	25									2.3	0.91	1.6	0.37						
114	26									2.4	0.97	1.7	0.40	1.1	0.15				
119	27									2.5	1.04	1.8	0.43	1.2	0.16				
123	28									2.6	1.12	1.8	0.46	1.2	0.17				
128	29									2.7	1.19	1.9	0.49	1.3	0.19				
132	30									2.8	1.27	2.0	0.53	1.3	0.20				
154	35									3.3	1.69	2.3	0.70	1.5	0.26				
176	40											2.6	0.89	1.7	0.34				
198	45											2.9	1.11	2.0	0.42				
220	50											3.3	1.35	2.2	0.51	1.0	0.08		
242	55													2.4	0.61	1.1	0.10		
264	60													2.6	0.71	1.2	0.12		
286	65													2.8	0.83	1.3	0.13		
308	70													3.1	0.95	1.4	0.15		
330	75													3.3	1.08	1.6	0.17		
352	80															1.7	0.20		
374	85															1.8	0.22	1.1	0.07
396	90															1.9	0.24	1.2	0.08
440	100															2.1	0.30	1.3	0.10
484	110															2.3	0.35	1.5	0.12
528	120															2.5	0.42	1.6	0.14
572	130															2.7	0.48	1.7	0.16
616	140																	1.8	0.19
660	150																	2.0	0.21

Shaded areas represent velocities over 1.5 m/s.
Use with caution where water hammer is a concern.

TECHNICAL

WIRE DATA

Standard Annealed Copper at 20° C

American Wire Gauge	Metric Wire Gauge	Diameter Mils	Diameter mm	Resistance Per mft Ohms	Resistance Per km Ohms
1		289.3	7.348	0.9239	0.4065
	7.0		7.000		0.4480
2		257.6	6.543	0.1563	0.5128
	6.0		6.000		0.6098
3		229.4	5.827	0.1971	0.6466
4		204.3	5.189	0.2485	0.8152
	5.0		5.000		0.08781
5		181.9	4.620	0.3134	1.028
	4.5		4.500		1.084
6		162.0	4.115	0.3952	1.297
	4.0		4.000		1.372
7		144.3	3.665	0.4981	1.634
	3.5		3.500		1.792
8		128.5	3.264	0.6281	2.061
	3.0		3.000		2.439
9		114.4	2.906	0.7925	2.600
10		101.9	2.588	0.9988	3.277
	2.5		2.500		3.512
11		90.7	2.30	1.26	4.14
12		80.8	2.05	1.59	5.21
	2.0		2.00		5.49
13		72.0	1.83	2.00	6.56
	1.8		1.80		6.78
14		64.1	1.63	2.52	8.28
	1.6		1.60		8.58
15		57.1	1.45	3.18	10.4
	1.4		1.40		11.2
16		50.8	1.29	4.02	13.2
	1.2		1.20		15.2
17		45.3	1.15	5.05	16.6
18		40.3	1.02	6.39	21.0
	1.0		1.000		22.0
19		35.9	0.912	8.05	26.4
	0.9		0.900		27.1
20		32.0	0.813	10.1	33.2

TECHNICAL

WIRE SIZING

Required Information

- Actual one-way length of wire between the controllers and the power source or the controllers and valves
- Allowable voltage loss along the wire circuit
- Accumulative current flowing through the wire section being sized in amperes

Resistance is calculated using this formula:

$$R = \frac{1000 \times AVL}{2L \times I}$$

- R* = Maximum Allowable Resistance of wire in ohms per 1000 meters
AVL = Allowable voltage loss
L = Wire length (one way) in meters
I = Inrush current

AVL for controller power wire sizing is calculated by subtracting the minimum operating voltage required by the controller from the minimum available voltage at the power source.

AVL for valve wire sizing is calculated by subtracting minimum solenoid operating voltage from controller output voltage. This number will vary depending on the manufacturer and in some cases with line pressure.

Valve Wire Sizing Example:

Given: The distance from the controller to the valve is 600 m. The controller output is 24 V. The valve has a minimum operating voltage of 20 V and an inrush current of 370 mA (0.37 A).

$$R = \frac{1000 \times 4}{2(600) \times 0.37}$$

$$R = \frac{4000}{444}$$

$$R = 9.01 \text{ ohms/1000 meters}$$

So, wire resistance can not exceed 9 ohms per 1000 m. Now go to table #1 and select the proper wire size. Since 1.5 mm² wire has more resistance than 9 ohms per 1000 m, choose 2.5 mm² wire.

Table 2 is a quick reference and is set up to provide maximum wire runs given the information at the bottom of the table.

Table 1	
Resistance of Copper Wire	
Wire Size mm ²	Resistance at 20° C (68° F) ohms/1000 m
0.5	38.4
1	18.7
1.5	13.6
2.5	7.4
4	4.6
6	3.1

Table 2						
Valve Wire Sizing (Maximum One-Way Distance in Meters Between Controller and Valve)						
Ground Wire mm ²	Control Wire					
	0.5	1	1.5	2.5	4	6
0.5	140	190	210	235	250	260
1	190	290	335	415	465	495
1.5	208	335	397	515	595	647
2.5	235	415	515	730	900	1030
4	250	465	595	900	1175	1405
6	260	495	647	1030	1405	1745

Solenoid: 24 VAC, Pressure: 10 bar (1000 kPa), Voltage Drop: 4V,
 Min. Operating Voltage: 20 V, Amperage Peak: 0.37 A
 For operation of 2 Valves (Amperage Peak: 0.74 A),
 the allowable distance is half that shown above.

ADDITIONAL DATA

REFERENCE CHART

Approximate Number of Wires to be Installed in Conduit or Tubing

Maximum Number of Wires in Conduit or Sleeving

Wire Size mm ²	25 mm	32 mm	40 mm	50 mm	63 mm	75 mm	90 mm	110 mm	160 mm	Wire Size mm ²
0.5	20	35	49	80	110	175	-	-	-	0.5
1	16	30	42	67	97	150	-	-	-	1
1.5	10	18	25	40	56	88	120	150	-	1.5
2.5	7	15	20	33	50	75	102	130	-	2.5
4	6	13	16	27	40	63	85	110	-	4
6	4	6	9	16	25	35	50	65	150	6

CLIMATE ET_p TABLE

Climate*	mm Daily
Cool Humid	2.5 to 3.8
Cool Dry	3.8 to 5.1
Warm Humid	3.8 to 5.1
Warm Dry	5.1 to 6.3
Hot Humid	5.1 to 7.6
Hot Dry	7.6 to 11.4
	↑ Worst case

Cool equals under 21° C as an average mid-summer high.
 Warm equals between 21° and 32° C as mid-summer highs.
 Hot equals over 32° C. Humid equals over 50% as average mid-summer relative humidity (dry under 50%).

TECHNICAL

FX
LUMINAIRE



**BRING A LITTLE LIGHT TO YOUR NEXT SITE.
EXPERIENCE FX LUMINAIRE AT WWW.FXL.COM.**



GET INTO THE SWING, VISIT
WWW.HUNTERGOLF.COM

PLAY ON



Hunter[®]
GOLF

STATEMENT OF WARRANTY

Hunter Industries Incorporated ("Hunter") warrants the following products to be free of defects in materials or workmanship under normal use for a period of two (2) years from the original date of manufacture: PGP-ADJ®, PGJ, MP Rotator family, PS family, PS Ultra family, Spray Nozzles, PCN, PCB, AFB, HPV, PGV family, SRV, SRC, X-Core family, Pro-C family, ROAM, SVC, WVP, WVS, PLD, PACZ, PCZ, AVB, PSR, HCV, SJ, HFT family, SBE family, RZWS, and ET System. Hunter warrants the following products to be free of defects in materials or workmanship under normal use for a period of three (3) years from the original date of manufacture: PGP Ultra family. Hunter warrants the following products to be free of defects in materials or workmanship under normal use for a period of one (1) year from the original date of manufacture: SRM family, Micro Sprays and Stream Drippers. Hunter warrants the following products to be free of defects in materials or workmanship under normal use for a period of five (5) years from the original date of manufacture: I-20, I-25, I-35, I-40, I-60 and I-90 families, Pro-Spray® family, Pro-Spray® PRS30 family, and Pro-Spray® PRS40 family, G-Spray, ICC, I-Core family and ACC controller families, ICD Decoder Products, ICR Remotes, IMMS™ Central Control Products, "Klik" Sensors, Solar-Sync, HQ, ICV plastic, and IBV brass valves, ICZ and PLD tubing. If a defect in a Hunter product is discovered during the applicable warranty period, Hunter will repair or replace, at its option, the product or the defective part. This warranty does not extend to repairs, adjustments, or replacement of a Hunter product or part that results from misuse, negligence, alteration, modification, tampering, or improper installation and/or maintenance of the product. This warranty extends only to the original installer of the Hunter product. If a defect arises in a Hunter product or part during the warranty period, you should contact your local Hunter Authorized Distributor.

HUNTER'S OBLIGATION TO REPAIR OR REPLACE ITS PRODUCTS AS SET FORTH ABOVE IS THE SOLE AND EXCLUSIVE WARRANTY SET FORTH BY HUNTER. THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. HUNTER WILL NOT BE LIABLE TO ANY PARTY IN STRICT LIABILITY, TORT, CONTRACT, OR ANY OTHER MANNER FOR DAMAGES CAUSED OR CLAIMED TO BE CAUSED AS A RESULT OF ANY DESIGN OR DEFECT IN HUNTER'S PRODUCTS, OR FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE.

If you have any questions concerning the warranty or its application, please write to:
Marketing Department, Hunter Industries Incorporated,
1940 Diamond Street, San Marcos, CA 92078, U.S.A.

ASAE CERTIFICATION STATEMENT

Hunter Industries Incorporated certifies that pressure, flow rate, and radius data for these products were determined and listed in accordance with ASAE Standard S398.1, Procedure for Sprinkler Testing and Performance Reporting, and are representative of performance of production sprinklers at the time of publication. Actual product performance may differ from the published specifications due to normal manufacturing variations and sample selection. All other specifications are solely the recommendation of Hunter Industries Incorporated.

Hunter[®]
THE IRRIGATION INNOVATORS

20
11**U.S.A. Headquarters
and Manufacturing**

1940 Diamond Street
San Marcos, CA 92078
Tel: (1) 760-744-5240
Fax: (1) 760-744-7461
Technical Help: (1) 760-591-7383

Mexico Manufacturing

Calle Nordika #8615
Parque Industrial Nordika
Tijuana, B.C., Mexico C.P. 22709
Tel: (52) 664-903-1300
Fax: (52) 664-903-8078

**Worldwide Offices
Australia**

8 The Parade West
Kent Town, South Australia 5067
Tel: (61) 8-8363-3599
Fax: (61) 8-8363-3687

Europe

Avda. Diagonal 523, 5º- 2º
Edificio Atalaya
08029 Barcelona, Spain
Tel: (34) 9-34-94-88-81
Fax: (34) 9-34-19-76-76

Middle East

P.O. Box 211303
Amman 11121, Jordan
Tel: (962) 6-515-2882
Fax: (962) 6-515-2992

China

B1618, Huibin Office Bldg.
No.8, Beichen Dong Street
Beijing 100101, China
Tel1/Fax: (86) 10-84975146
Tel2: (86) 13-901321516

